





2' X 2' PANEL LIGHT
 DAMP LOCATION
 PANELUME

PROJECT: _____
 TYPE: _____

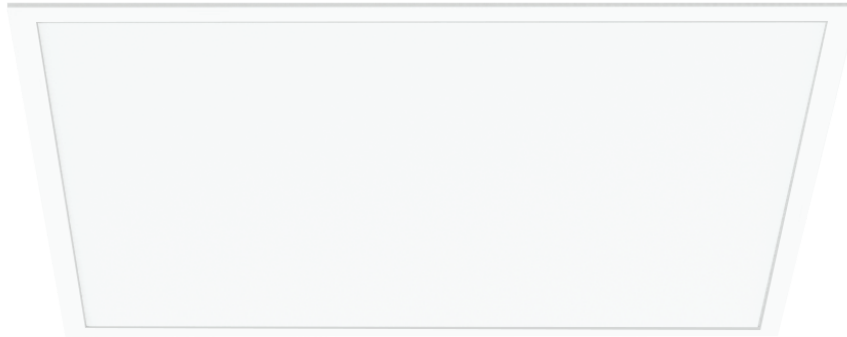

A	B	C
23.8 603.0 mm	23.8 603.0 mm	1.8 45.0 mm

APPLICATION

Flat panel 1x4, 2x2, 2x4 series for grid ceiling installation and for general illumination.

ELECTRONICS

Switchable Multi Lumen (2500-6400) and Multi Kelvin (30K-65K) LED system simplifies ordering. 0-10V 1% dimming driver for control of light level. Emergency Battery optional.

CONSTRUCTION

Powder coated aluminum housing with diffuse white acrylic lens.

MOUNTING

Grid ceiling.

FINISH

Matte white powder coat.

WATTS	MULTI LUMEN		MULTI KELVIN	
	DELIVERED LUMENS	CCT	DELIVERED LUMENS	CCT
20W	2500Lm	30K	3000K	
25W	3200Lm	35K	3500K	
30W	3850Lm	40K	4000K	
35W	4480Lm	50K	5000K	
40W	5120Lm	65K	6500K	
50W	6400Lm			

SERIES	LUMENS	CCT	DRIVER /VOLTAGE	FINISH	EM OPTIONS
FP22	ML Multi Lumen	MK Multi Kelvin	DX 1%, 0-10V, 120V/277V	MW Matte White CC Custom Color	EM Emergency Battery Pack

EXAMPLE: FP22MLMKDXMW

