

SHOWER LIGHT / WET LOCATION

PROJECT: _____
 QUANTITY: _____ TYPE: _____



SGD4X

APPLICATION

3.5" aperture round MR16 shower light.

FEATURES

Efficient reflector design optimized for MR16 LED lamps (sold by others). Versa light housing accepts a variety of trims. Trim rotates 360° for easy alignment. Integral 5/8" (0.625") plaster ring. Tool-less access for ease of maintenance. Multi-bar adjustable mounting brackets.

TRIM FINISH

Variety of powdercoat and anodized finishes available on trim.

ELECTRONICS


120V Electronic transformer is standard.

CONSTRUCTION

Frame constructed of 20 ga. aluminum. Trim fabricated from .063" aluminum and finished to specifications.

CODE COMPLIANCE

ETL listed for damp locations. Wet location available. Manufactured and tested to UL Standard No. 1598.

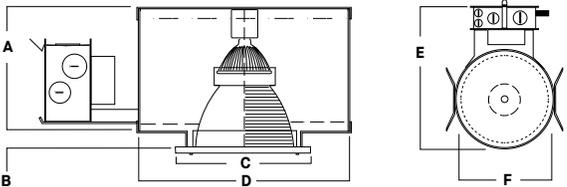

A	B	C	D	E	F
4.6 117.5 mm	0.6 15.8 mm	5.87 149.1 mm	8.0 203.2 mm	13.0 330.2 mm	8.0 203.2 mm

PRODUCT SELECTOR GUIDE

SERIES	DIMMING	OPTIONS	BAR HANGERS	TRIM	FINISH	LENS
SGD4X						

EXAMPLE

SGD4X	E1		BH27	AR4250FW	MW	SO
-------	----	--	------	----------	----	----

HOUSING

SERIES	DIMMING	OPTIONS
SGD4X	E1 Electronic, 120V	CR Corrosion Resistant TR Top Relamping Option

MOUNTING OPTIONS

BAR HANGERS
BH27 27" Solid Bars H12 12" - 24" Expandable Bars CB24 24" C-Channel Bars

TRIM OPTIONS

TRIM	FINISH	LENS
AR4250 FW Flat White Door FB Flat Black Door	MW Matte White MB Matte Black	GL Clear Glass Lens SO Micro Prism Solite™ Lens WL Wet Location

