





10" ROUND REMODEL PLATFORM

XT SERIES / 5000 LUMENS MAX

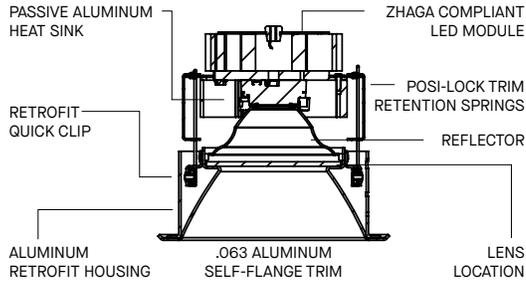

FIT SIZE	
SERIES	10"
MINIMUM	9"
MAXIMUM	10 3/4"



A	B	C
10.0	11.3	10L-20L: 6.8
254.0 mm	287.0 mm	30L: 7.5
		40L-50L: 7.3

Ceiling Cutout: Ø 9.7"

SGRTE10XT - TRIM FLANGE / NON-IC RATED

APPLICATION

Round XT focused illumination series LED downlight for high performance retrofit or remodel application.

FEATURES

Remodel round downlight housing designed for install in finished "hard" ceiling or into existing precut hole. Quick mount remodel spring clips with mechanical lock down. Return edge to seat fixture in ceiling. Fixture will work in up to 1" thick ceiling'. Quick change LED module with interchangeable optics for job site flexibility and fixture maintenance. Tool-less driver and j-box access. Posi-lock trim retention torsion springs.

TRIM FINISH

A variety of architectural powdercoat and anodized finishes are available. Matte White flange is standard.

ELECTRONICS

LED system features Xicato LED module with proprietary phosphor technology that provides consistent, stable color with CCT control of +/- 100K over life of the light engine. Base CRI is 83 with 2-step MacAdam Ellipse binning. High CRI is 98 with 1x2-step MacAdam Ellipse binning. Variety of electronic 120V/277V and dimming drivers.

CONSTRUCTION

Housing/frame constructed of .060 aluminum to resist corrosion. Self-flanged one piece trim spun from 0.060" thick high purity aluminum and finished to specification.

CODE COMPLIANCE

BAA Compliant. Non-IC rated. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. Optional Wet location. Manufactured and tested to UL standards No. 1598/8750.

WATTAGE / LUMENS DATA		
PART NUMBR	SOURCE LUMENS*	SYSTEM WATTS
SGRTE10XT10L	1000	11.1
SGRTE10XT13L	1300	15.0
SGRTE10XT20L	2000	23.7
SGRTE10XT30L	3000	34.6
SGRTE10XT40L	4000	39.9
SGRTE10XT50L	5000	54.0

SERIES	LUMENS ²	CCT	BEAM	DRIVER / VOLTAGE ⁴	OPTIONS ⁷	TRIM	FINISH	TRIM OPTIONS	
SGRTE10XT	83 CRI			ND 27°	E ₋ Electronic Driver	1 120V	AR1066XT	SG ⁶ Semi-Diffuse HZ Haze Full Diffuse MW Matte White MB Matte Black PT Platinum Silver OB Oil Rubbed Bronze CH Charcoal AC Anodic Champagne AS Anodic Sapphire AM Anodic Malachite SN Sun Gold CO Copper Metallic GH Graphite AMB Anti Microbial Finish CC ⁹ Custom Color	
	10L	1000 Lm	27K 2700K	MD 46°	DS10 ₋ 10% 0-10V	2 277V			FS Fusing
	13L	1300 Lm	30K 3000K	WD 50°	DO10 ₋ 1% 0-10V	EM Emergency			GR Goof Ring
	20L	2000 Lm	35K 3500K	XW 52°	DS2W1 ¹ 1% ELV/MLV, 120V				
	30L	3000 Lm	40K 4000K		DLTE1 ¹ 1% Lutron® 2-Wire Forward Phase, 120V				
	40L	4000 Lm			DL3E ₋ 1% Lutron® EcoSystem®, Fade				
	50L	5000 Lm			EL10 ₋ 1%, eldoLED				
	98 CRI ³				EDO1 ₋ 0.1%, eldoLED				
	10L	1000 Lm	27HK 2700K		DALL ₋ DALI Control				
	13L	1300 Lm	30HK 3000K		DMXS ⁸ DMX Standard Configuration				
	20L	2000 Lm	35HK 3500K		DMXC ⁸ DMX Non-Standard Custom				
	30L	3000 Lm	40HK 4000K						

EXAMPLE: SGRTE10XT13L35KMD1/AR1066XTSG

NOTES:
 1 Consult Factory for Thicker Ceiling 2 Nominal Source Lumens at Any CCT 3 98CRI Operates at Higher Watts than 83CRI 4 Contact Factory for Additional Options 5 50L Not Available with Lutron Drivers 6 Contact Factory
 7 See Product Options Page For Details 8 Standard Finish 9 Contact Factory for Special Finishes 10 Standard Lens for MD, WD, XW 11 Standard Lens for ND 12 Flange and Reflector Same Finish



PROJECT: _____
 QUANTITY: _____ TYPE: _____

