




TWD - TRACK WITH DATA
 2 CIRCUIT / 2 NEUTRAL
 277 VOLT

USE WITH TWD ADAPTOR

COMPONENTS OF TWD TRACK INSTALLATION

TYPICAL TRACK INSTALLATIONS

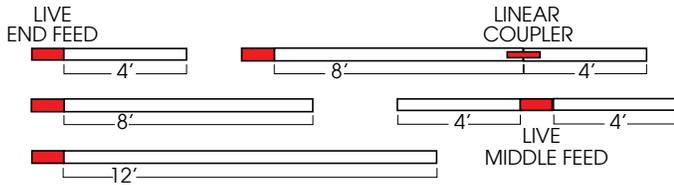

- Architectural Grade.
- ISO 9002 Quality.
- Low Profile, easy installation.
- Integral Suspension rail.
- Copper connector/ polycarbonate components.
- UL Listed.



LENGTH	MODEL	WHITE	BLACK
4'	TWD44	WH	BK
8'	TWD48	WH	BK
12'	TWD412	WH	BK

SPECIFY FINISH: Available for track lengths only; Black (BK): White (WH)

ACCESSORIES FOR TWD Track INSTALLATION

END FEED
 GROUND LEFT - TWD11L
 GROUND RIGHT - TWD11R



L - COUPLER
 GROUND OUTSIDE - TWD34O
 GROUND INSIDE - TWD34I



LINE MIDDLE FEED
 FLEX - COUPLER
 TWD14




END CAP
 TWD41



X - COUPLER
 TWD40-38



COVER
 TWDC



STRAIGHT COUPLER
 TWD21



T - COUPLER WITH FEEDING OPTIONS
 GROUND INSIDE RIGHT - TWD40-IR, GROUND INSIDE LEFT - TWD40-IL
 GROUND OUTSIDE RIGHT - TWD40-OR, GROUND OUTSIDE LEFT - TWD40-OL



Surface mount shown, contact factory for other mounting options.

SPECIFY FINISH: Black (BK): White (WH)



PROJECT: _____
 TYPE: _____



Dimensions and values shown are nominal. Spectrum Lighting continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.