
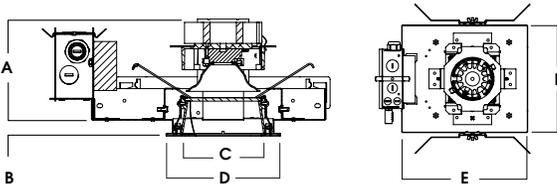
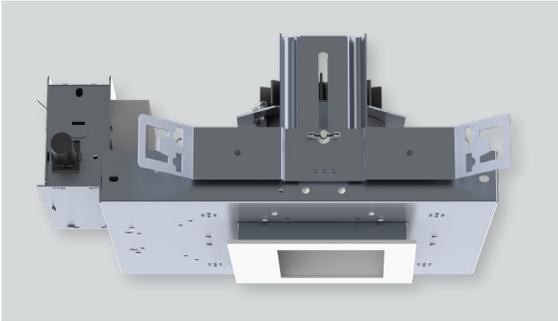


4" SQUARE WALL WASH

PC SERIES / 3000 LUMENS

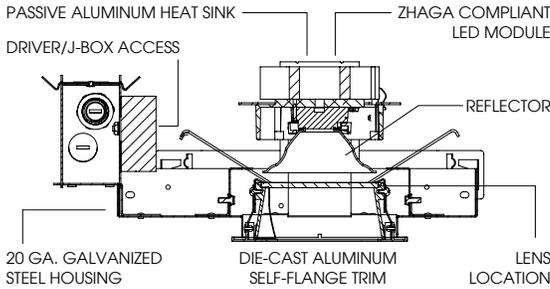

A	B	C	D	E	F
4.9 124.5 mm	.625 15.2 mm	4.0 101.6 mm	5.4 137.2 mm	13.2 335.3 mm	9.5 241.3 mm

SWFO4PC - TRIM FLANGE / NON-IC RATED

APPLICATION

Versatile 4" Square aperture recessed LED wall wash with a wide range of lumens and control options.

FEATURES

Two-stage optical system for smooth light distribution and focus control. Quick change LED module with interchangeable optics for job site adjustment and fixture maintenance. Shallow plenum design. Tool-less driver and j-box access. Posi-lock trim retention torsion springs. See RWZO4 series for trimless plaster or wood ceiling.

TRIM FINISH

A variety of architectural powdercoat and anodized finishes are available.

Matte white flange is standard.

ELECTRONICS

LED module features high brightness Phillips LEDs. 3-step MacAdam Ellipse binning and 80 and 90 CRI available. Variety of electronic 120V/277V and dimming drivers.

CONSTRUCTION

Housing/frame constructed of #20 ga. galvanized steel to resist corrosion. Self-Flanged one piece trim spun from 0.063" thick high purity aluminum and finished to specification.

CODE COMPLIANCE

BAA Compliant. Non-IC rated. UL certified to meet US and Canadian standards. Suitable for dry or damp locations. Optional Wet location. Manufactured and tested to UL standards No. 1598/8750.

WATTAGE TO LUMENS UPDATE

CURRENT PART NUMBER EXAMPLE	SOURCE LUMENS ¹	SYSTEM WATTS
SWFO4PC10L	1100	15.2
SWFO4PC20L	2100	23.2
SWFO4PC30L	3000	31.0

SERIES	LUMENS ¹	CCT	OPTICS	DRIVER / VOLTAGE ²	OPTIONS ³	TRIM	FINISH	TRIM OPTIONS ⁵			
SWFO4PC	80 CRI		XW Extra Wide	E ₋ Electronic Driver DS10 ₋ 10%, 0-10V DO10 ₋ 1%, 0-10V	1 120V 2 277V	BH27 ⁴ H12 H06 CB24 EM 27" Solid Bars 12" - 24" Expandable Bars 6" - 12" Expandable Bars 24" C-Channel Bars 7W Emergency Battery Test Switch Remote	SW4FPC ⁵	MW ⁶ MB PT OB CH AC AS AM SN CO GH AMB CC ⁷ Matte White Matte Black Platinum Silver Oil Rubbed Bronze Charcoal Anodic Champagne Anodic Sapphire Anodic Malachite Sun Gold Copper Metallic Graphite Anti Microbial Finish Custom Color	SKX ⁸ SKW PF ¹⁰ Linear Wall Wash Lens Linear Wall Wash Lens Wet Location Polished Flange		
	10L	1100 Lm								27K	2700K
	20L	2100 Lm								30K	3000K
	30L	3100 Lm								35K	3500K
										40K	4000K
	90 CRI										
10L	1000 Lm	27HK	2700K								
20L	2000 Lm	30HK	3000K								

EXAMPLE: SWFO4PC10L35KWDE1/BH27/SW4FPCMWSKX

NOTES:
 1 Nominal Source Lumens at Any CCT 2 Contact Factory for Additional Options 3 See Product Options Page for Details 4 Standard Bar Hangers 5 "F" Indicates Self-Flange Trim, Matte White Standard 6 Standard Finish
 7 Contact Factory for Special Finishes 8 Contact Factory for Special Lenses/Louvers 9 Standard Lens 10 Flange and Reflector Same Finish



PROJECT: _____
 TYPE: _____



Dimensions and values shown are nominal. Spectrum Lighting continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.