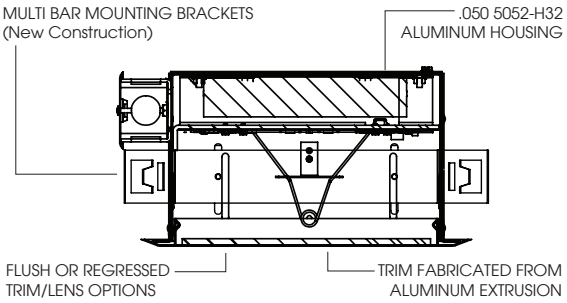

14" SQUARE LENSED

OA SERIES / 4400 LUMENS MAX LED

recessed fixtures

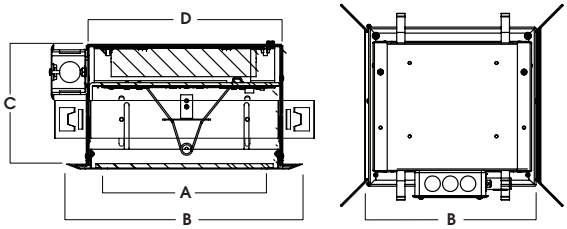

A	B	C	D
10.5 266.7 mm	14.5 368.3 mm	5.1 129.54 mm	11.9 SQ 302.26 mm

SR14SQLEDOA

APPLICATION

14" square recessed LED downlight LED features soffit/area light for optimal performance.

FEATURES

Efficient, powerful LED light source, designed to exceed 50,000 hours of life (**L70**). Multi-Bar mounting brackets. All LED modules and drivers are replaceable and up-gradeable. New and Retrofit/Remodeler options. Wet location use screws fasteners. (4)

FINISH

A variety of architectural powdercoat and anodized finishes are available. Matte White self-flange is standard.

ELECTRONICS

LED module features high brightness white Nichia LEDs. 3-step MacAdam Ellipses binning and CRI 84 minimum. Variety of electronic 120v/277v and dimming drivers.

CONSTRUCTION

Housing constructed of .050 5052-H32 aluminum. Trim fabricated from aluminum extrusion and finished to specification.

CODE COMPLIANCE

ARRA Compliant. Non-IC rated. ETL listed for damp locations. Optional Wet location. Manufactured and built to UL standards No. 1598/8750.

WATTAGE TO LUMENS UPDATE			
CURRENT PART NUMBER EXAMPLE	PREVIOUS PART NUMBER EXAMPLE	SOURCE LUMENS[1]	SYSTEM WATTS
SR14SQLEDOA11L	SR14SQLEDOA11W	1100	14W
SR14SQLEDOA22L	SR14SQLEDOA18W	2200	26W
SR14SQLEDOA33L	SR14SQLEDOA25W	3300	37W
SR14SQLEDOA44L	SR14SQLEDOA34W	4400	47W

Retrofit/Remodeler with Flush Trim

RECESSED HOUSING SPECIFICATION

SERIES	LUMENS[1]		CCT		DRIVER / VOLTAGE[2]				OPTIONS[3]	
SR14SQLEDOA	11L	1100 Lm	30K	3000° K	E_	Electronic Driver	1	120v	BH27[4]	27" Mounting Bars
	22L	2200 Lm	35K	3500° K	DS10_	10% 0-10V Dimming	2	277v	BH6	Expandable Bar Hangers, 6" - 12"
	33L	3300 Lm	40K	4000° K					BH12	Expandable Bar Hangers, 12" - 24"
	44L	4400 Lm	50K	5000° K					CB24	C-Channel Bars
									FS	Fuse Holder and Fuse
									EM	Emergency Battery Pack
									CR	Corrosion Resistant
									RM	Remodeler Housing

TRIM SPECIFICATION

TRIM	FINISH[5]		OPTIONS	
FLUSH TRIM	FINISH		LENS	
FT1414 Flush Extruded Aluminum Door	MW[6]	Matte White	FO[7]	Matte White Acrylic Lens 90% Efficient
REGRESSED TRIM	GW	Gloss White	SO	Solite Lens
RT1414 Regressed Extruded Aluminum Door	MB	Matte Black	WL[8]	Wet Location
	GB	Gloss Black		
	BZ	Bronze		
	PT	Platinum		
	CC	Custom Color		

EXAMPLE: SR14SQLEDOA44L35KE1/BH27/FT1414GW/FO

NOTES:
1 Nominal Source Lumens **2** Contact Factory for Additional Options **3** See Product Options Page for Details **4** Standard Bar Hangers
5 Contact Factory for Special Finishes **6** Standard Finish **7** Standard Lens **8** Trim Secured with 4 Screws

OSRAM
LED Technology included

5 YEAR WARRANTY

MADE IN THE USA

Dimensions shown are nominal. Spectrum Lighting is continually improving products and reserves the right to make changes that will not alter performance or appearance with or without written notice.

PROJECT:	TYPE:
CAT. NO.:	

SPECTRUM LIGHTING INC.
WWW.SPECLIGHT.COM • 994 JEFFERSON STREET, FALL RIVER, MA 02721 • 508.678.2303 FAX 508.678.2260