


WARNING: Be certain all power is OFF! Wire according to local and national codes. This product should be installed by a qualified electrician.

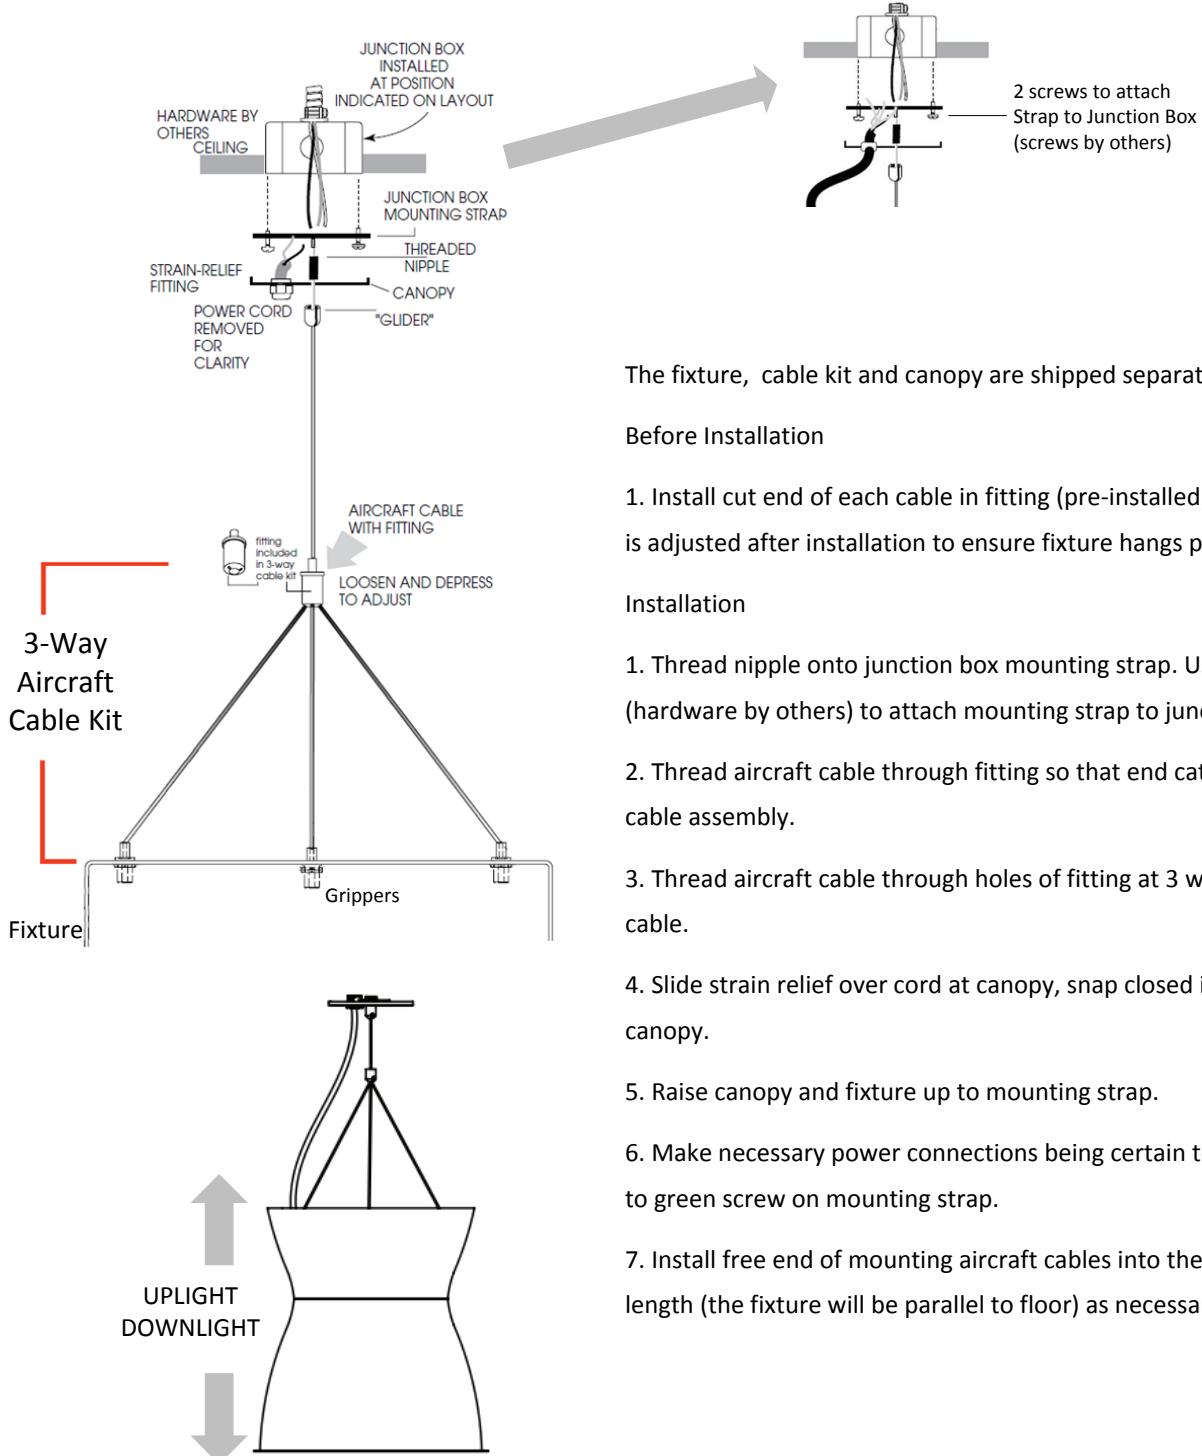

The fixture, cable kit and canopy are shipped separately.

Before Installation

1. Install cut end of each cable in fitting (pre-installed). Cable length is adjusted after installation to ensure fixture hangs parallel to floor.

Installation

1. Thread nipple onto junction box mounting strap. Use 2 screws (hardware by others) to attach mounting strap to junction box.
2. Thread aircraft cable through fitting so that end catches in top cable assembly.
3. Thread aircraft cable through holes of fitting at 3 way aircraft cable.
4. Slide strain relief over cord at canopy, snap closed install in canopy.
5. Raise canopy and fixture up to mounting strap.
6. Make necessary power connections being certain to attach ground to green screw on mounting strap.
7. Install free end of mounting aircraft cables into the grippers, adjust length (the fixture will be parallel to floor) as necessary.