

SOME OPTIONS NOT AVAILABLE ON ALL FIXTURES. CONSULT SPECIFICATION SHEETS.
SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION.

MOUNTING BAR OPTIONS

All Spectrum Recessed Frames have wire mount provisions.

BH27 - 27" SOLID BARS

Standard on all SG series recessed fixtures. May be field bent or cut to fit job site applications. #14 GA. galv. steel solid mounting bar. Fits all Spectrum recessed fixtures. Mounting holes and nail in feature. Vertical and horizontal adjustment.



H06 / H12 - EXPANDABLE BARS

Standard on all SP and optional on SG fixtures. Galvanized steel expandable bar mounting bars. Designed for T-Grid, wood and metal joists. Slot for T-Grid with optional screw lock-down. Nail-in feature for wood studs. Screw hole feature for metal studs. H06 Compresses to 6" and expands to 12". H12 Compresses to 12" and expands to 24". Vertical and horizontal adjustment.




CB24 / CB48 - C-CHANNEL BARS

Optional on all SG series fixtures. #16 GA galv. steel C-Channel bar. Designed for T-Bar ceilings. Available in 24" and 48" standard lengths. Custom sizes available. Strong enough to support all Spectrum recessed fixtures.



CH24 / CH36 - CHICAGO BARS

Optional on all SG series available for 24" and 36" OC Ceiling designs. Proprietary latch design engages Chicago bar and locks fixtures in place. Optional tek screw down holes. Fixture locates at center of bar, but will adjust across full length of bar.

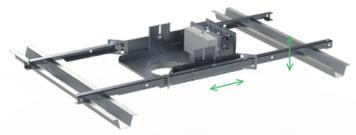

EMERGENCY BATTERY

UL 1310 Certified, Class 2 Compliant. Rated for 10 year service life. Recyclable Ni-Cad battery. Includes single-piece TBTS test switch and charge indicator accessory. Constant power supply for superior lumen maintenance. Rated for 90 minute operation. This product has been tested on our OS, XT and GV LED systems and maintains 5-year warranty. Listed for use in damp locations and in enclosed and gasketed fixtures. May be ordered as remote mount for field installation up to 20' from fixture. Consult factory for remote EM options.

| LED SERIES | EM5W SOURCE LUMENS (90 MIN) | EM7W* SOURCE LUMENS (90 MIN) | EM12W SOURCE LUMENS (90 MIN) |
|------------|-----------------------------------|------------------------------------|------------------------------------|
| OS | 500 Lm | 700 Lm | 1100 Lm |
| XT | 600 Lm | 800 Lm | 1300 Lm |
| GV | 700 Lm | 900 Lm | 1600 Lm |

*Standard Wattage Shipped

EM7W*

7W Emergency Battery for LED 120V/277V



EM5W - Optional

5W Emergency Battery for LED 120V/277V



EM12W - Optional

12W Emergency Battery for LED 120V/277V



ADDITIONS

FS - FUSING

Factory installed, slow blow type fuse protects fixture against voltage surges.



GS - GASKET

Gasket for trims. Fits in back of trim flange. Best for rough ceilings.

CR - CORROSION RESISTANT


All materials go through seven stage powder coat process. All untreated components are aluminum.

AMB - ANTI MICROBIAL

Special Anti Microbial powdercoat finish resists and inhibits bacterial growth.

PR - DEEP CEILING EXTENSION

All SG fixtures have standard 5/8" plaster neck and may work up to 1" thick ceiling on certain fixtures (see individual cut sheets). For deeper/thicker ceilings, please specify PR option (Must specify depth in inches). May be Factory Installed. Consult factory for availability.



GR - GOOF RING

Goof rings are spun .050 aluminum and finished matte white to match trim flange. These oversize rings cover up rough or poorly cut out holes. Goof rings seat and center trims. Special sizes available.



Dimensions shown are nominal. Spectrum Lighting is continually improving products and reserves the right to make changes that will not alter performance or appearance with or without written notice.

| | |
|------------------|--------------|
| PROJECT: | TYPE: |
| CAT. NO.: | |