




Fixture Weight: 17.2 lbs

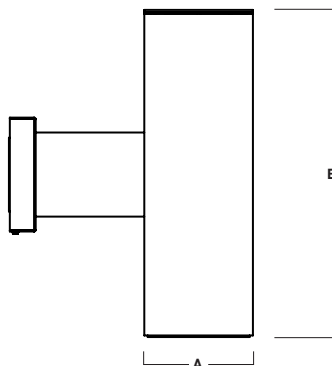



6" SQUARE DIRECT

FOCUSED ILLUMINATION / FIXTURE OPTIONS





SERIES SIZES

C0618SQXT

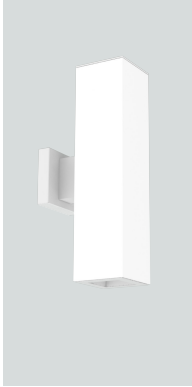

A	B
6.0	18.0
152.4 mm	457.2 mm


C0624SQXT

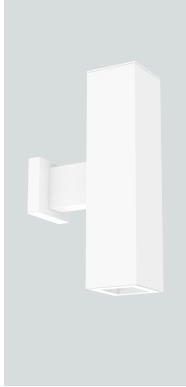


A	B
6.0	24.0
152.4 mm	609.6 mm

STANDARD FINISHES


MW
MATTE WHITE

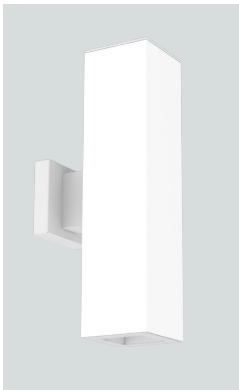

MB
MATTE BLACK

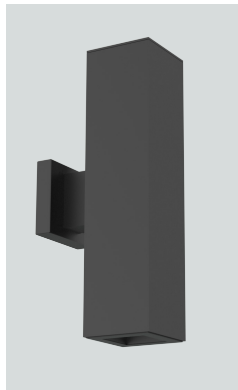


PT
PLATINUM SILVER

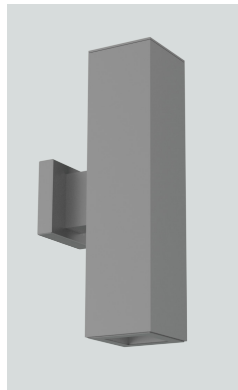



WALL MOUNT DETAIL

WM3
WALL MOUNT 3" EXTENSION

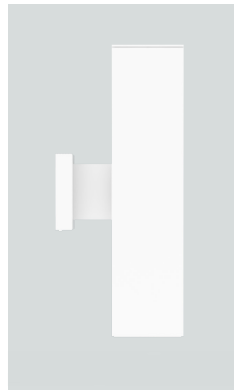


FRONT VIEW

SIDE VIEW





A	B	C	D
2.4	6.4	4.7	10.7
61.0 mm	162.6 mm	119.4 mm	271.8 mm

WM5
WALL MOUNT 5" EXTENSION

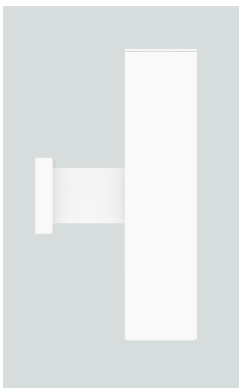

FRONT VIEW


SIDE VIEW



A	B	C	D
2.4	6.4	4.7	13.4
61.0 mm	162.6 mm	119.4 mm	340.4 mm


EMERGENCY BATTERY OPTIONS

EMRM* - 7W REMOTE EMERGENCY BATTERY
(50' MAX)



A	B	C
1.3	12.6	13.0

EMEN* - 7W REMOTE EMERGENCY BATTERY
WITH ENCLOSURE (50' MAX)



A	B	C
2.0	17.0	6.2

*OTHER EM BATTERY SIZES AVAILABLE, CONSULT FACTORY

6" ROUND DIRECT

FOCUSED ILLUMINATION / PHOTOMETRIC DATA



C06xxSQXT 13L XN 35K XX TCY GL MW

CANDLEPOWER CURVE TEST SP-01200	INTENSITY CANDELA 0° AZIMUTH	ZONAL LUMENS	SINGLE UNIT: PERFORMANCE DIRECT FOOTCANDLES BASED ON DOWNLIGHT ONLY	MULTIPLE UNITS: PERFORMANCE 80/50/20% REFLECTANCES INITIAL FOOTCANDLES AND WATTS PER SQUARE FOOT									
	0°	0° - 10° 627 55%	Mounting Height Aff	FC at Center on Floor	Beam Diameter	FC at Beam Edge	Ceiling Height	Fixture Spacing	RCR 6		RCR 8		
	0° 14116	0° - 20° 916 80%	12' 12"	98 fc	2.6'	48 fc	22'	4"	71	1.18	67	1.17	
	5° 8235	0° - 30° 1096 96%	14' 12"	72 fc	3.0'	35 fc	26'	5"	49	0.81	46	0.80	
	15° 691	0° - 40° 1153 101%	16' 12"	55 fc	3.4'	27 fc	32'	6"	31	0.51	29	0.50	
	25° 440	0° - 60° 1173 103%	20' 12"	35 fc	4.3'	17 fc	Delivered Illuminance Rating: (DIR)		60 FC per W/Sq. Ft.		57 FC per W/Sq. Ft.		
	35° 23	0° - 80° 1186 104%	24' 12"	25 fc	5.1'	12 fc	3' Suspension Length to luminous aperture Square rooms used for multiple units: RCR 6: Length & Width = Ceiling Ht. - 3.0' x 1.66 RCR 8: Length & Width = Ceiling Ht. - 3.0' x 1.25 * Average Footcandles at 0' Above Floor * Exceeds Spacing Ratio by 5% ** Exceeds Spacing Ratio by 9% *** Exceeds Spacing Ratio by 3%						
	45° 14	0° - 90° 1140 100%	28' 12"	18 fc	6.0'	9 fc							
	55° 14	Total 1140 100%	32' 12"	14 fc	6.8'	7 fc							
	90° 1		36' 12"	11 fc	7.7'	5 fc							

6" ROUND DIRECT

FOCUSED ILLUMINATION / PHOTOMETRIC DATA



C06xxSQXT 30L WD 35K XX TCY SO MW

CANDLEPOWER CURVE TEST SP-01203_M-30L	INTENSITY CANDELA 0° AZIMUTH	ZONAL LUMENS	SINGLE UNIT: PERFORMANCE DIRECT FOOTCANDLES BASED ON DOWNLIGHT ONLY				MULTIPLE UNITS: PERFORMANCE 80/50/20% REFLECTANCES INITIAL FOOTCANDLES AND WATTS PER SQUARE FOOT							
	0°	0° - 10° 392 15%	Mounting Height AFF	FC at Center on Floor	Beam Diameter	FC at Beam Edge	Ceiling Height	Fixture Spacing	RCR 3		RCR 5			
	0° 4230	0° - 20° 1247 49%	8 ' 66 fc	6.4 ' 26 fc	18 ' 6' 69	0.92 56 0.83								
	5° 4097	0° - 30° 2028 80%	10 ' 42 fc	8.0 ' 17 fc	22 ' 8' 40	0.53 32 0.48								
	15° 3092	0° - 40° 2352 92%	12 ' 29 fc	9.6 ' 12 fc	26 ' 10' 26	0.34 21 0.31								
	25° 1657	0° - 60° 2496 98%	14 ' 22 fc	11.3 ' 9 fc	Delivered Illuminance Rating: (DIR)		75 FC per W/Sq. Ft.		67 FC per W/Sq. Ft.					
	35° 330	0° - 80° 2555 100%	16 ' 17 fc	12.9 ' 7 fc										
	45° 110	0° - 90° 2537 100%	20 ' 11 fc	16.1 ' 4 fc	3' Suspension Length to luminous aperture Square rooms used for multiple units: RCR 3: Length & Width = Ceiling Ht. - 5.5' x 3.33 RCR 5: Length & Width = Ceiling Ht. - 5.5' x 2.00 * Average Footcandles at 2.5' Above Floor									
	55° 50	Total 2537 100%	24 ' 7 fc	19.3 ' 3 fc										
	90° 2		28 ' 5 fc	22.5 ' 2 fc										

Delivered Lumens: 2563
Luminaire Watts: 32.6
LER: 78.62

CP at 0° (Nadir): 4230
CRI: 83

Beam Angle: 44°
Spacing Ratio: 0.69

Lumen Multiplier: 10L x 0.32, 13L x 0.43, 20L x 0.67
CCT Multiplier: Same for all available CCT's

C06xxSQXT 30L XW 35K EX TCY SO MW

CANDLEPOWER CURVE TEST SP-01199_M-30L	INTENSITY CANDELA 0° AZIMUTH	ZONAL LUMENS	SINGLE UNIT: PERFORMANCE DIRECT FOOTCANDLES BASED ON DOWNLIGHT ONLY	MULTIPLE UNITS: PERFORMANCE 80/50/20% REFLECTANCES INITIAL FOOTCANDLES AND WATTS PER SQUARE FOOT								
	0°	0° - 10° 301 13%	Mounting Height AFF	FC at Center on Floor	Beam Diameter	FC at Beam Edge	Ceiling Height	Fixture Spacing	RCR 2		RCR 4	
	0° 3161	0° - 20° 1024 43%	8 ' 49 fc	7.5 ' 18 fc	18' 8'	8'	39 0.53	34 0.53				
	5° 3076	0° - 30° 1784 76%	10 ' 32 fc	9.4 ' 12 fc	22' 10'	22 0.31	20 0.31					
	15° 2628	0° - 40° 2126 90%	12 ' 22 fc	11.3 ' 8 fc	26' 12'	14 0.20	13 0.20					
	25° 1621	0° - 60° 2308 98%	14 ' 16 fc	13.2 ' 6 fc	Delivered Illuminance Rating: (DIR)		73 FC per W/Sq. Ft. 64 FC per W/Sq. Ft.					
	35° 406	0° - 80° 2364 100%	16 ' 12 fc	15.1 ' 5 fc								
	45° 153	0° - 90° 2370 100%	20 ' 8 fc	18.9 ' 3 fc	3' Suspension Length to luminous aperture Square rooms used for multiple units: RCR 2: Length & Width = Ceiling Ht. - 5.5' x 5.00 RCR 4: Length & Width = Ceiling Ht. - 5.5' x 2.50 * Average Footcandles at 2.5' Above Floor							
	55° 50	Total 2370 100%	24 ' 5 fc	22.6 ' 2 fc								
	90° 3		28 ' 4 fc	26.4 ' 1 fc								

Delivered Lumens: 2370
Luminaire Watts: 32.6
LER: 72.70

CP at 0° (Nadir): 3161
CRI: 83

Beam Angle: 50°
Spacing Ratio: 0.81

Lumen Multiplier: 10L x 0.32, 13L x 0.43, 20L x 0.67
CCT Multiplier: Same for all available CCT's