SPEC SPECIALS

PROJECT:


QUANTITY: TYPE:

LUMEN BOWL


CEILING MOUNT


FIXTURE DIMENSIONS


LB30



LB36

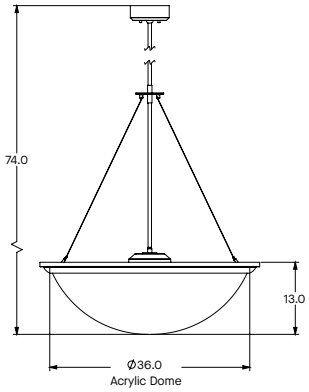

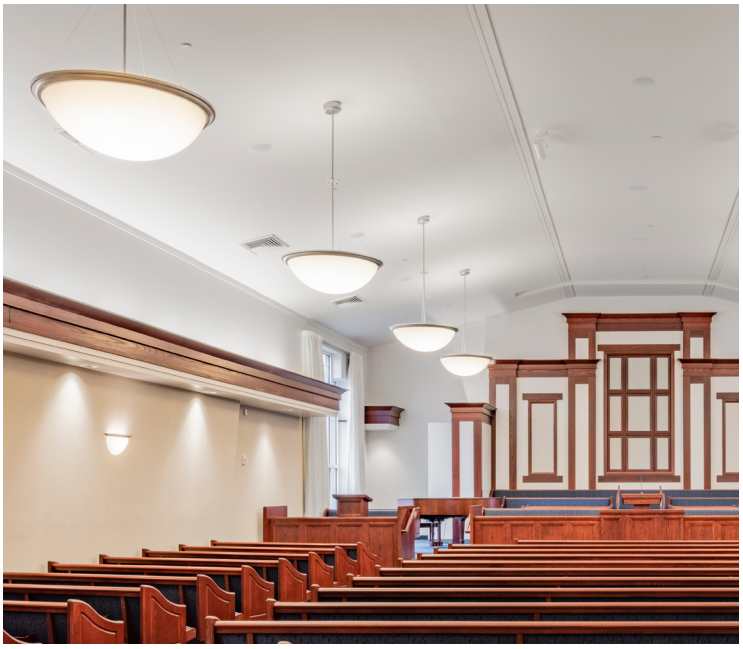

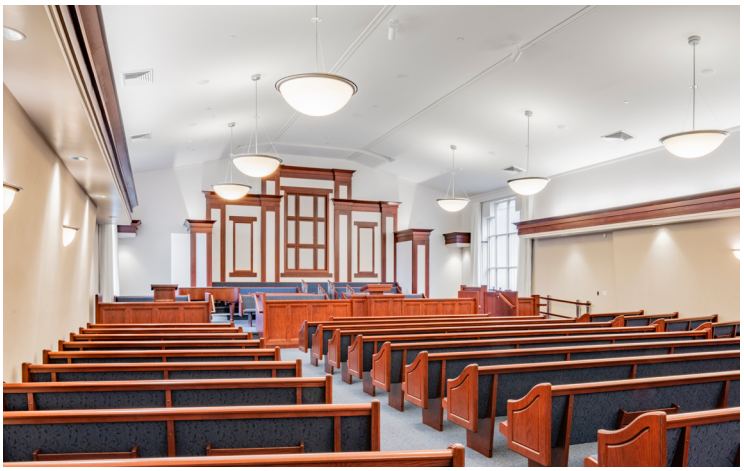

Fixtures built with double seal and top dust prevention lens.

MOUNTING RULES

Applicable to both 30" and 36" bowls - measuring from the bottom of the bowl to the ceiling: total lengths of 44 inches or less use Mounting A (support cables attach directly to the canopy), total lengths of 45 inches or more use Mounting B, which includes a support plate for the cables.

PRODUCT SELECTOR GUIDE

SERIES	LUMENS	CCT	DRIVER / DIMMING	MOUNTING	EMERGENCY OPTIONS	FINISH
	98L		DX	CD3X_		

EXAMPLE

LB30	98L	27K	DX	CD3X_	EMRM	TW

SERIES	LUMENS		CCT		DRIVER / DIMMING		MOUNTING		EMERGENCY OPTIONS		FINISH	
LB30	**98L**	8000 Lm	**27K**	2700	**DX**	1% 0-10V, 120V/277V	**CD3X_**	3 Cable Mount with Cord	**EMRM**	7W Remote EM	**TW**	Textured White
LB36	**140L**	11000 Lm	**30K**	3000					**EMEN**	7W Remote with Enclosure	**TB**	Textured Black
	Nominal Delivered Lumens are Representitive of Up/Down Combined		**35K**	3500							**MT**	Textured Silver
			40K	4000			Must Specify Length in Inches				**CE**	Polished Chrome
											PB	Polished Brass
											CC	Custom Color

EXAMPLE: LB3098L27KDXCD3X_EMENTW

Spectrum Lighting

Dimensions and values shown are nominal. Spectrum Lighting continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.