


WARNING: Be certain all power is OFF! Wire according to local and national codes. This product should be installed by a qualified electrician.

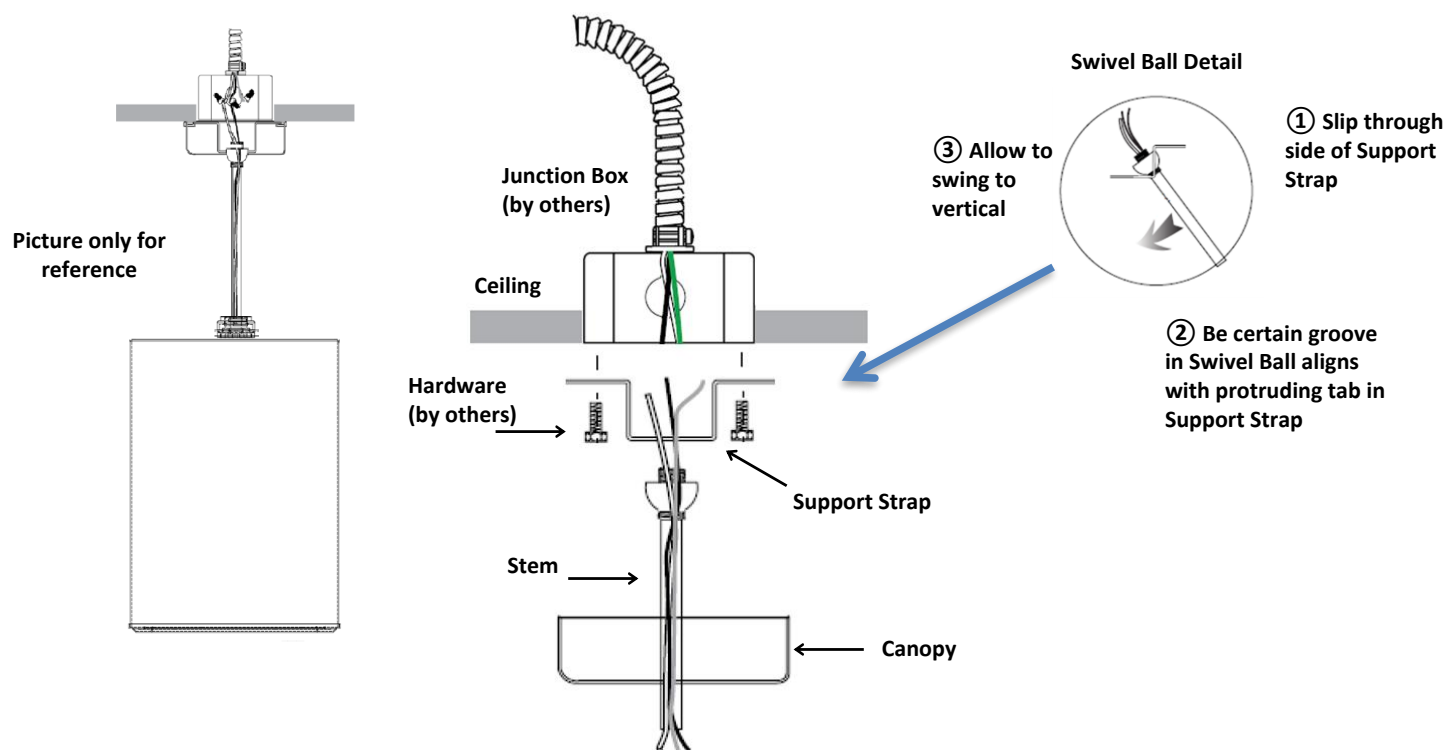

Notes prior to beginning installation:

- Slide the stem through the center Canopy opening.
- Install Stem to Fixture, bringing conductors through.

Installation Instructions:

- Mount the Support Strap to the Junction Box (by others). Mounting Strap is for a standard 3.5" junction box.
- Slide the Swivel Ball/Stem Assembly through the side of the Support Strap, as shown in the Swivel Ball Detail.
- Align the notch in the Swivel Ball with the tab in the Support Strap.
- Allow the Swivel Ball/Stem Assembly to swing vertical.
- Make wiring connections between Stem & Junction Box. Green ground screw provided; attached to Support Strap.
- Raise Canopy & align tab in Support Strap with slots in side of Canopy.

TD/ Dual Circuit Option Requires Dedicated Site Controls By Others. Controls by Others Are Not To Allow Both Circuits To Be Energized Simultaneously, Consult Factory For More Information.

Important: Fixture has been factory wired, ready for installation.