




LUMEN MAX ALOCT-DU SERIES 250 WATT MAX



PRODUCT INFORMATION:

- The *LUMEN MAX* DU Induction Series offers a unique alternative to Metal Halide.
- Octagon style vented ballast housing (OCTV) is easy to install and maintain with hinged ballast access door.
- 100,000 hours rated average life.
- Crisp White Light 80+ CRI, with no color shift.
- Instant on/off.
- Wide choice of mounting options.
- Aluminum reflector available with focused downlight
- 20 Powdercoat colors available. Damp location rated.
- Manufactured and tested to UL Standard No. 1598. .

DIFFUSER OPTION

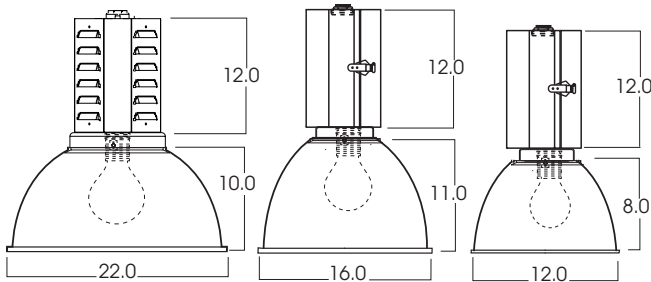

MODEL	WATTS	LAMP TYPE	GENERATOR	MOUNTING	DIFFUSER OPTIONS	
ALOCT12- 12"x8" (55w MAX)	DU-55w	3K -3000° Kelvin	G1 -DU Generator 120v	HM* -Hang-Straight Pendant (3/8 IPS)	MOUNTING WAG12 -12" Wire Guard	LENS CN -Conical Lens
ALOCT16- 16"x11" (85w MAX)	DU-85w	4K -4000° Kelvin	G2 -DU Generator 277v	PM* -Rigid Pendant (3/8 IPS)	WAG16 -16" Wire Guard	DL -Drop Lens
ALOCT22- 22"x10" (250w MAX)	DU-120w* DU-165w DU-200w* DU-250w*	5K -5000° Kelvin		CD* -Aircraft Cable, Straight Cord SCI -Safety Cable HC -Hook & Cord NM2 -1/2" Hub NM3 -3/4" Hub	WAG22 -22" Wire Guard DR12 -12" Spun Door DR16 -16" Spun Door DR22 -22" Spun Door BC12 -12" Band Clamp BC16 -16" Band Clamp BC22 -22" Band Clamp HWG22 -22" Half Wire Guard	
	*5K Only			* Specify Length in 6" increments		
ALOCTV22	DU200	5K	G1	HM36	WAG22	DL

Dimensions shown are nominal. Spectrum Lighting is continually improving products and reserves the right to make changes that will not alter performance or appearance with or without written notice.



PROJECT:	TYPE:
CAT. NO.:	

