



**LUMEN MAX  
PRDCI-DU SERIES  
300 WATT MAX**

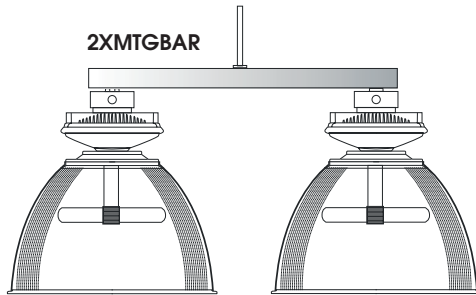


**PRODUCT INFORMATION:**

- The *LUMEN MAX* DCI Induction Series offers a unique alternative to Metal Halide.
- Diecast ballast housing (DCI) is easy to install and maintain.
- 100,000 hours rated average life.
- Crisp White Light 80+ CRI, with no color shift.
- Instant on/off.
- Wide choice of mounting options.
- Prismatic refractor allows up-light.
- 20 Powdercoat colors available. Damp location rated.
- Manufactured and tested to UL Standard No. 1598.




DOUBLE MOUNTED PRDCI

**DIFFUSER  
OPTION**



DL-Drop Lens

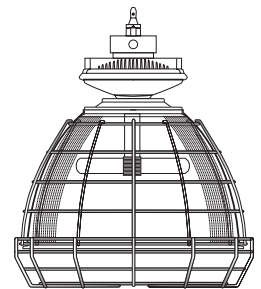

HWG-Half Wire Guard

MODEL	WATTS	LAMP TYPE	GENERATOR	MOUNTING	REFRACTOR	DIFFUSER OPTIONS	
<b>PRDCI22-</b> 22"x 14" Prismatic Refractor (300w MAX)	<b>DU-200w</b> <b>DU-250w</b> <b>DU-300w</b>	<b>5K</b> -5000° Kelvin  Other kelvin temperatures are available, consult factory	<b>G1</b> -DU Generator 120v <b>G2</b> -DU Generator 277v	<b>HM*</b> -Hang-Straight Pendant (3/8 IPS) <b>PM*</b> -Rigid Pendant (3/8 IPS) <b>CD*</b> -Aircraft Cable, Straight Cord <b>SM</b> -Surface Mount <b>SC1</b> -Safety Cable <b>HC</b> -Hook & Cord <b>NM2</b> -1/2" Hub <b>NM3</b> -3/4" Hub <b>2XMTGBAR</b> -Double Fixture Mounting Bar  * Specify Length in 6" increments	<b>PR22</b> -22" Clear Prismatic <b>SC2</b> -Safety Cable, refractor to trim	<b>MOUNTING</b> <b>WAG22</b> -22" Wire Guard <b>DR22</b> -22" Spun Door <b>BC22</b> -22" Band Clamp <b>HWG22</b> -22" Half Wire Guard	<b>LENS</b> <b>DL</b> -Drop Lens
<b>PRDCI22X2-</b> 22"x 14" Prismatic Refractor (300w MAX) DOUBLE MOUNTING							
<b>PRDCI22</b>	<b>DU250</b>	<b>5K</b>	<b>G1</b>	<b>NM3</b>	<b>PR22</b>	<b>BC22</b>	<b>PC</b>

Dimensions shown are nominal. Spectrum Lighting is continually improving products and reserves the right to make changes that will not alter performance or appearance with or without written notice.



<b>PROJECT:</b>	<b>TYPE:</b>
<b>CAT. NO.:</b>	

