





**LUMEN MAX
DOMED TOP
PRISMATIC REFRACTOR
T9-210 / 315 WATT MAX**



PRODUCT INFORMATION:

- The *LUMEN MAX* Metal Halide Series offers a unique design for high-bay applications.
- Features new Metal Halide 210W/315W T9 technology.
- System is dimmable to 50% using low voltage dimming control (optional).
- Lamp life is rated at 20,000 hours.
- High maintained mean lumens (24,000/37,000 lm)
- CRI of 90. 3K or 4K Lamp temperature.
- 20 Powdercoat colors available.
- Damp location rated.
- Manufactured and tested to UL standard No. 1598.

**DIFFUSER
OPTIONS**

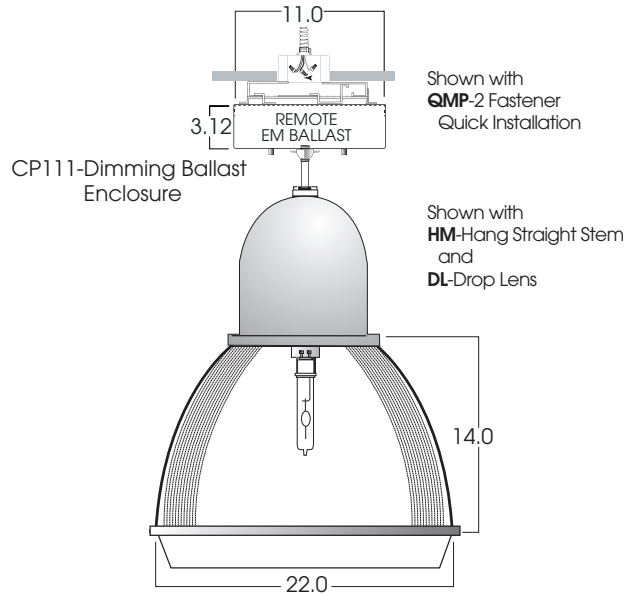

MODEL	WATTS	BALLAST	LAMP	KELVIN	MOUNTING	FINISH	REFRACTOR	DIFFUSER OPTIONS	
PRDDH22- 22" X14" Prismatic Refractor (315w MAX)	MH210 (24,000 lm) MH315 (37,000 lm)	MH2 -Metal Halide 277v DIMMH2 -Metal Halide Dimming 277v	T9 (PGZ18)	3K -3000° K 4K -4000° K	HM* -Hang-Straight Pendant (3/8 IPS) PM* -Rigid Pendant (3/8 IPS) CD -Air Craft Cable/Cord CP111 -Ballast Housing SC1 -Safety Cable HC -Hook & Cord NM2 -1/2" Hub NM3 -3/4" Hub QMP -Quick Connect Plate (2 fastener System)	GW -Gloss White GB -Gloss Black MW -Matte White MB -Matte Black BZ -Bronze PT -Platinum Silver MT -Mini Tek Silver TW -Textured White CC -Custom Color	PR22 -22" Clear Prismatic DF22 -22" Diffuse SC2 -Safety Cable, refractor to trim	MOUNTING WAG22 -22" Wire Guard DR22 -22" Spun Door BC22 -22" Band CLamp Wire Guard RS22 -22" Reflector Shroud	LENSE CN -Conical Lens DL -Drop Lens
PRDDH22	MH210	MH2	T9	3K	HM*/CP111/QMP	MT	PR22	BC22	DL

* Specify Length
in 6" increments

Dimensions shown are nominal. Spectrum Lighting is continually improving products and reserves the right to make changes that will not alter performance or appearance with or without written notice.



PROJECT: _____ **TYPE:** _____

CAT. NO.: _____

