




# INFINIUM™ LUMEN MAX PRISMATIC HI-BAY 6 x 14 WATT LED MAX



**LED**  
LUMEN MAX  
SERIES

## PRODUCT INFORMATION:

- The LUMEN MAX LED Series PRDDH is decorative and compact.
- Infinium™ Pulse-Tech features integral air-cooling technology.
- Single high powered LED produces point source quality and luminaire focus.
- 50,000 hours rated lamp life means low maintenance.
- High flux density 14w LED.
- All LED modules are replaceable and up-gradeable.
- Lexalite® prismatic refractor allows up-light component. Opal and Etched diffuse finishes are available.
- Wide choice of mounting options.
- 20 Powdercoat colors available. (Gloss White is standard).
- Manufactured and tested to UL Standard.

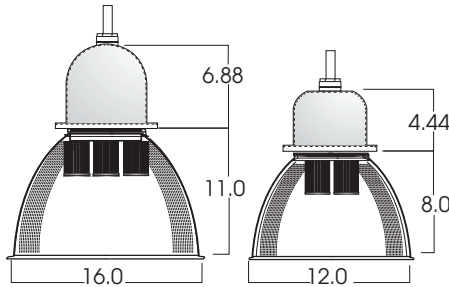

## DIFFUSER OPTIONS



**RS-Reflector Shroud**

KELVIN°	WATTAGE	LUMENS
27K°	14W	350
31K°	14W	375
35K°	14W	400
41K°	14W	480
55K°	14W	560

MODEL	WATTS	KELVIN	BEAM	VOLTS	MOUNTING	REFRACTOR	DIFFUSER OPTIONS
<b>PRDDH12-</b> 12"x 8" (4 LED 14w MAX)	<b>LED 1x14</b> <b>LED 2x14</b> <b>LED 3x14</b> <b>LED 4x14</b>	<b>27K -2700° K</b> <b>31K -3100° K</b> <b>35K -3500° K</b> <b>41K -4100° K</b>	<b>ND (12°)</b> <b>MD (22°)</b>	<b>E1</b> -Electronic 120v <b>E2</b> -Electronic 277v	<b>HM*</b> -Hang-Straight Pendant (3/8 IPS) <b>PM*</b> -Rigid Pendant (3/8 IPS)	<b>PR12</b> -12" Clear Prismatic <b>PR16</b> -16" Clear Prismatic	<b>MOUNTING</b> <b>WAG12</b> -12" Wire Guard <b>WAG16</b> -16" Wire Guard <b>DR12</b> -12" Spun Door <b>DR16</b> -16" Spun Door <b>BC12</b> -12" Band Clamp <b>BC16</b> -16" Band Clamp <b>RS12</b> -12" Reflector Shroud <b>RS16</b> -16" Reflector Shroud
<b>PRDDH16-</b> 16"x 11" (6 LED 14w MAX)	<b>LED 6x14</b>	<b>55K -5500° K</b>	<b>WD (38°)</b>	Dimming Not Available	<b>CD*</b> -Aircraft Cable, Straight Cord <b>SC1</b> -Safety Cable <b>HC</b> -Hook & Cord <b>NM2</b> -1/2" Hub <b>NM3</b> -3/4" Hub	<b>OP12</b> -12" Opal Etch <b>OP16</b> -16" Opal Etch <b>DF12</b> -12" Diffuse <b>DF16</b> -16" Diffuse <b>SC2</b> -Safety Cable, refractor to trim	<b>LENS</b> <b>GL</b> -Clear Glass <b>PG</b> -Prismatic Glass <b>FG</b> -Frosted Glass <b>CN</b> -Conical Lens <b>DL</b> -Drop Lens
<b>PRDDH16</b>	<b>LED 614</b>	<b>31K</b>	<b>MD</b>	<b>E1</b>	<b>HM36</b>	<b>PR16</b>	<b>WAG16</b> <b>GL</b>

\* Specify Length in 6" increments

Dimensions shown are nominal. Spectrum Lighting is continually improving products and reserves the right to make changes that will not alter performance or appearance with or without written notice.



<b>PROJECT:</b>	<b>TYPE:</b>
<b>CAT. NO.:</b>	

