

INFINIUM™
PARK LIGHTER SERIES
 14 WATT LED

RLM
SERIES




GW- Gloss White Finish Shown



PRODUCT INFORMATION:

- The Park Lighter Series offers rugged design and pole mounting options.
- Optics and lamping designed to produce .5fc while using indirect lighting.
- Fixture is constructed of spun and die cast aluminum.
- Infinium™ "PulseTech" LED lamping, (50,000 hrs. lamp life).
- Each high powered LED produces point source quality and luminaire focus.
- High flux density 14 watt LED.
- 50,000 Hours LED system life.
- Choose from 5 Kelvin temperatures and 3 beam spreads.
- Choose from 20 powdercoat finishes, gloss white interior.
- Standard fixture WL-Wet location listed.
- Manufactured and built to UL standard No 1598.

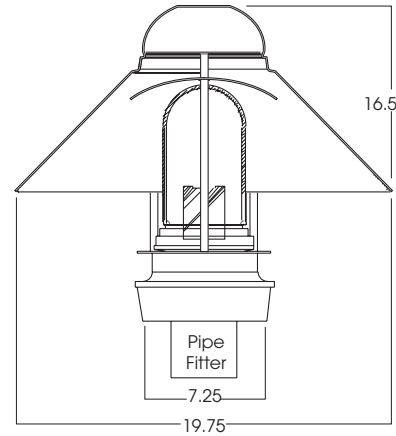

KELVIN°	WATTAGE	LUMENS
27K°	14W	350
31K°	14W	375
35K°	14W	400
41K°	14W	480
55K°	14W	560

MODEL	WATTS	KELVIN	BEAM	DRIVER	LAMP ENCLOSURE	POLE FITTER	FINISH***
PK1910LED Parklighter LED Exterier Fixture	14w	27K -2700° K 31K -3100° K 35K -3500° K 41K -4100° K 55K -5500° K	ND MD WD	E1 -120v E2 -277v	GJ2 -Glass Lamp Enclosure FJ2 -Frosted Lamp Enclosure WL -Wet Location	PF3 -Fitter for 3" O.D. Pole PF4 -Fitter for 4" O.D. Pole	GW -Gloss White GB -Gloss Black EG -Evergreen VE -Verde Green AY -Aero Yellow BL -Blue Streak OR -Orange RD -Red Baron BZ -Bronze CO -Copper Metallic SI -Silver MM -Metal Finish (Brushed Copper, Brushed Aluminum, Polished Brass) <i>consult factory</i> CC -Cusom Color
PK1910LED	14W	31K	MD	E1	GJ2 WL	PF3	GW

*** See SPECTRUM Color Chart for a full list

Dimensions shown are nominal. Spectrum Lighting is continually improving products and reserves the right to make changes that will not alter performance or appearance with or without written notice.



PROJECT:	TYPE:
CAT. NO.:	

