




12" SQUARE INDUCTION SERIES REGRESSED / LENSED 85 WATT MAX

12SQDU
SPECTRUM
GOLD SERIES™

FEATURES & SPECIFICATIONS:

- Diffuser frame secured using torsion springs for ease in re-lamping.
- Frame may be secured to fixture with tamper-proof hardware, for vandal-resistant installation.
- Regressed finished white to blend with ceiling.
- Induction system technology- 100,000 hrs. rated life.
- Clear tempered safety glass lens optional.
- Intended for Non-IC new construction.
- Frame constructed of 18 ga. galvanized steel.
- Supplied with 27" long, heavy ga. galvanized steel bar hangers.
- High frequency generator, -9% THD.
- Manufactured and tested to UL standard No. 1598. ETL Listed.

Max Ceiling Thickness: 1.0 (25.4 mm)
Ceiling Cutout: 12.5" (317.5 mm)²
Fixture Weight: 12.0 lbs

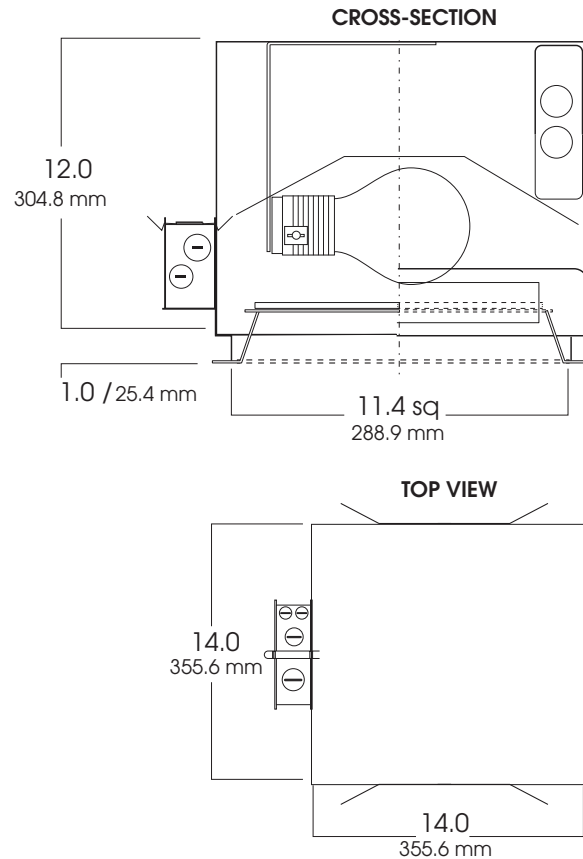

SERIES	WATTS	KELVIN°	GENERATOR	OPTIONS	DOOR	TRIM OPTIONS
SG12SQDU- Spectrum Gold 12" Horizontal Square Induction System Regressed Lens	55 85	3K -3000° Kelvin 4K -4000° Kelvin	G1 -QL Generator 120v G2 -QL Generator 277v	CB24 -C-Channel bars 1-470 CR -Corrosion Resistant 1-460 FS -Fuse holder and fuse PR -Plaster Ring 1-430 TBC -T-bar clips 1-475	RW -Regressed White Door/ White Regression RB -Regressed Black Door/ Black Regression	GL -Clear Glass lens PG -Prismatic (T73) Lens (standard) GS -Gasket WL -Wet Location
SG12SQDU	55	3K	G1	CB24	RW	GS

Dimensions shown are nominal. Spectrum Lighting is continually improving products and reserves the right to make changes that will not alter performance or appearance with or without written notice.



PROJECT:	TYPE:
CAT. NO.:	

