





INFINIUM™ 12" SQUARE SERIES CENTER OPTIC DOWNLIGHT

12SQLED
SPECTRUM
INFINIUM™

FEATURES & SPECIFICATIONS:

- 12" Square recessed LED downlight with performance center optic.
- Available in 21w, 42w.
- **All LED modules and drivers are replacable and up-gradeable.**
- 30,000 hours rated LED life.
- 5% dimming standard.
- Trim supports a variety of lens /accessory options.
- Intended for Non-IC new construction.
- Frame constructed of 20 ga. aluminum.
- Supplied with 27" long, heavy ga. galvanized steel bar hangers.
- Electronic driver 120 Volt standard.
- Manufactured and built to UL standard No 1598.
- For options detail, see page numbers listed below.

Max Ceiling Thickness: 1.5 (38.1 mm)
Ceiling Cutout: 3.9 ø (99.1 mm ø)
Fixture Weight: 3.85 lbs

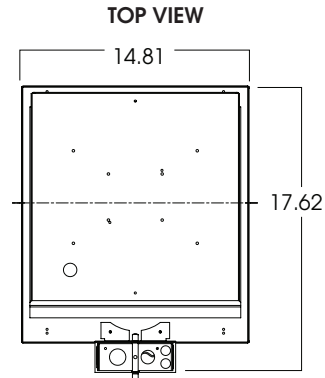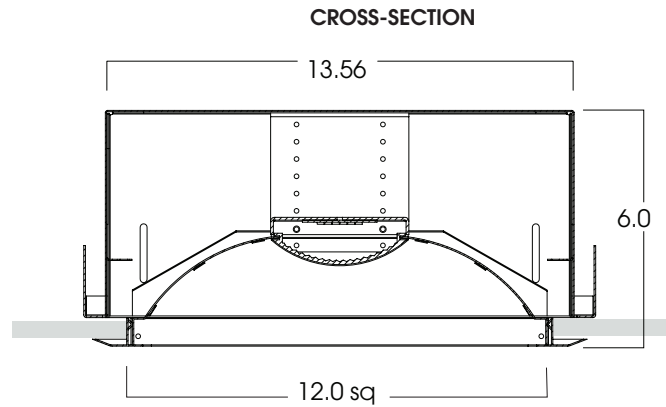

SERIES	LED	KELVIN	DRIVER	OPTIONS	REFLECTOR	OPTICS
SG12SQLED- Spectrum Infinium 12" Square LED Fixture	21w 42w	35K -3500° K 41K -4100° K	E1 -Electronic, 120v E2 -Electronic, 277v DR1 (TRO) -Trope Dimming 120v (20%)Strato Dimming 120v (3%) DR1 (STR) -Strato Dimming 120v (3%) DR2 (STR) -Strato Dimming 277v (3%) -Lutron Hi-Lume™ DL1 (L3D) 120v (dimming level 1%) DL2 (L3D) -Lutron Hi-Lume™ 277v (dimming level 1%)	BH6 -Expandable Bar Hangers, 6" - 12" BH12 -Expandable Bar Hangers, 12" - 24" CB24 -C-Channel bars 1-470 FS -Fusing CCEA -Chicago Ceiling Plenum CCEA 1-480 CR -Corrosion Resistant 1-460 PR -Plaster Ring 1-430 TBC -T-bar clips 1-475 EMLED -Emergency Back-up Battery	12SQ-GW -Gloss White RRGW -Multi-Step Gloss White Reflector CC -Custom Collor	3.5LA -3½" Curved Linear Prismatic Acrylic Lens
SG12SQLED	21W	35K	E1	CB24	12SQ GW	3.5LA

Dimensions shown are nominal. Spectrum Lighting is continually improving products and reserves the right to make changes that will not alter performance or appearance with or without written notice.



PROJECT:	TYPE:
CAT. NO.:	

