



12" VERTICAL FLUORESCENT LENSED SPLOY


1 x 70 WATT MAX

12V
SPECTRUM
GOLD SERIES™


FEATURES & SPECIFICATIONS:

- SG12V features a deep reflector with a wide variety of lenses and splays.
- Intended for Non-IC new construction.
- Frame constructed of 18 ga. galvanized steel.
- Supplied with 27" long, heavy ga. galvanized steel bar hangers.
- Fluorescent ballasts shall be integrally mounted, electronic sound rated "A", Class P, multi-volt 120v - 277v.
- UL Listed for Damp Locations.
- For options detail, see page numbers listed below.



Max Ceiling Thickness: 1.0 (25.4 mm)
Ceiling Cutout: 12.2 Ø (311.2 mm Ø)
Fixture Weight: 9.0 lbs

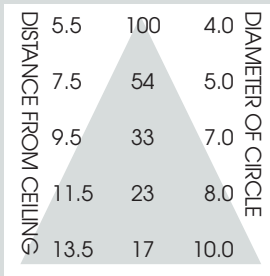

CONE OF LIGHT

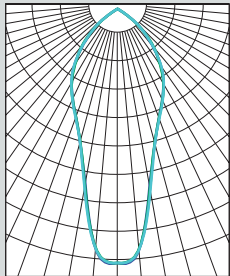

12V157w-Efficiency: 61.6%
Spacing: 0.56

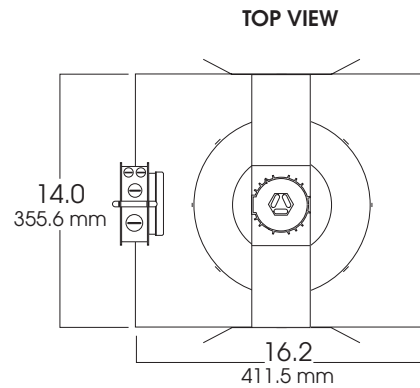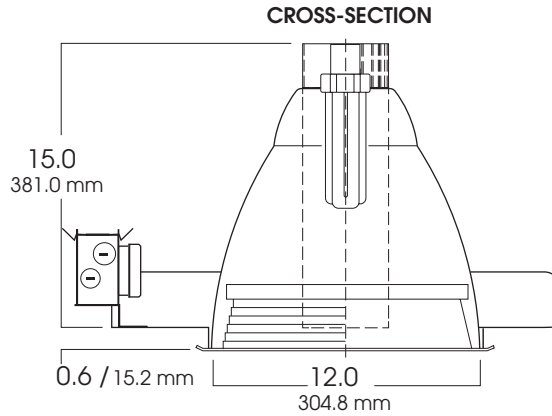

SERIES	WATTS	BALLAST	OPTIONS	SPRAY	TRIM OPTIONS
SG12V- Spectrum Gold 12" Vertical	118	EX -Electronic, multi-volt 120v thru 277v	CB24 -C-Channel bars 1-470	AR1220-WS -White w/White flange (standard)	PG -Prismatic (T73) lens (standard)
	126	DA1 -Advance Mark 10™ powerline dimming, 120v	CCEA -Chicago Ceiling Plenum CCEA 1-480	CS -Clear Alzak w/white flange	FG -Frosted Glass
	142	DA2 -Advance Mark 10™ powerline dimming, 277v	CR -Corrosion Resistant 1-460	CSPF -Clear Alzak w/polished flange	FL -Fresnel Lens
	157	DAM7 -Advance Mark 7™ 0-10v dimming, 120v thru 277v	EM -Emergency battery pack 1-420	SGS -Semi-Diffuse Low-Iridescent w/white flange	GL -Clear Glass lens
	170	DAM7 -Advance Mark 7™ 0-10v dimming, 120v thru 277v	FS -Fuse holder and fuse	SGSPF -Semi-Diffuse Low-Iridescent w/polished flange	GS -Gasket
		DL1 -Lutron Compact SE™ 120v (min. dimming level 5%) ¹	PR -Plaster Ring 1-430	RB -Regressed black baffled w/white flange	PC -Clear Polycarbonate
		DL2 -Lutron Compact SE™ 277v (min. dimming level 5%) ¹	RM -Remodeler Housing 1-450	RBBF -Regressed black baffled w/black flange	PP -Prismatic Polycarbonate
		¹ Not available for 57w or 70w lamp	TBC -T-bar clips 1-475	RW -Regressed white baffled w/white flange	WL -Wet Location 1-470
			TP -Tamper Resistant	CC -Custom Color	XB¹ -Cross Blade Louver
			TST¹ -Twist-Lok Socket 1-425		¹ For WS, CS, CSPF, SGS and SGSPF trims only
SG12V	132	EX	EM/	AR1220 WS	PG

Dimensions shown are nominal. Spectrum Lighting is continually improving products and reserves the right to make changes that will not alter performance or appearance with or without written notice.



PROJECT:	TYPE:
CAT. NO.:	

