





20" HORIZONTAL FLUORESCENT SURFACE GLOW 4 x 70 WATT MAX

20H
SPECTRUM
GOLD SERIES™

FEATURES & SPECIFICATIONS:

- SG20H features a unique diffuser that allows a subtle glow at the ceiling.
- Intended for Non-IC new construction.
- Spun aluminum housing with ballast/wiring compartment at top..
- Ballasts shall be integrally mounted, electronic sound rated "A", Class P, multi-volt 120v - 277v.
- UL Listed for Damp Locations.
- For options detail, see page numbers listed below.

Max Ceiling Thickness: 1.5 (38.1 mm)
Ceiling Cutout: 26.0Ø (660.4 mm Ø)
Fixture Weight: 21.0 lbs

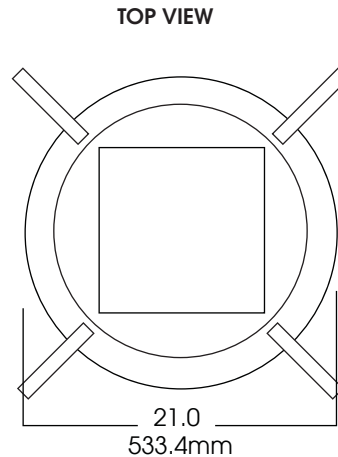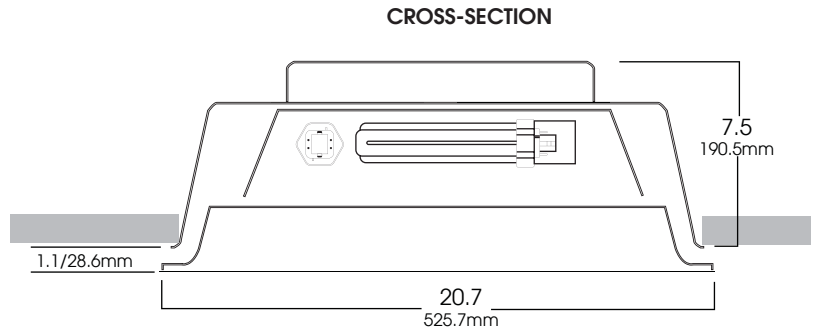

SERIES	WATTS	BALLAST	OPTIONS	GLOW TRIM	TRIM OPTIONS
SG20H- Spectrum Gold 20" Horizontal Glow Lens	4x26 4x32 4x42 4x57 4x70	EX -Electronic, multi-volt 120v thru 277v DA1 -Advance Mark 10™ powerline dimming, 120v ¹ DA2 -Advance Mark 10™ powerline dimming, 277v ¹ DAM7 -Advance Mark 7™ 0-10v dimming, 120v thru 277v DL1 -Lutron Compact SE™ 120v (min. -dimming level 5%) ¹ DL2 -Lutron Compact SE™ 277v (min. dimming level 5%) ¹	CCEA -Chicago Ceiling Plenum CCEA 1-480 CR -Corrosion Resistant 1-460 EM -Emergency battery pack 1-420 FS -Fuse holder and fuse PR -Plaster Ring 1-430 RM -Remodeler Housing 1-450 TST -Twist-Lok Socket 1-425	AR12003-WS -White w/White flange (standard) CS -Clear Alzak w/white flange CC -Custom Color	PG -Prismatic (T73) lens (standard) FG -Frosted Glass FL -Fresnel Lens GL -Clear Glass lens GS -Gasket PC -Clear Polycarbonate PP -Prismatic Polycarbonate WL -Wet Location 1-470
SG20H	342	EX	EM/	AR2003 WS	PG

¹ Not available for 57w lamp

¹ For **WS, CS, CSPF, SGS** and **SGSPF** trims only

Dimensions shown are nominal. Spectrum Lighting is continually improving products and reserves the right to make changes that will not alter performance or appearance with or without written notice.



PROJECT:	TYPE:
CAT.	

