

2'x2' VERTICAL FLUORESCENT HAND-BLOWN GLASS


1 x 57 WATT MAX




FEATURES & SPECIFICATIONS:


- SG22V features a shallow matte white dome that reflects light from a decorative conoid glass.
- Hand-blown cased glass center available in white, orange, blue, and red.
- Intended for Non-IC new construction
- Frame constructed of 20 ga. galvanized steel.
- Supplied with a 27" long, heavy ga. galvanized steel bar hangers.
- Ballasts shall be integrally mounted, electronic, sound rated "A", Class P, multi-volt 120v - 277v.
- UL Listed for Damp Location.
- For options detail, see page number listed below.

Max Ceiling Thickness: 1.5 (38.1 mm)
 Ceiling Cutout: 24.25 Ø (238.8 mm Ø)
 Fixture Weight: 6.5 lbs

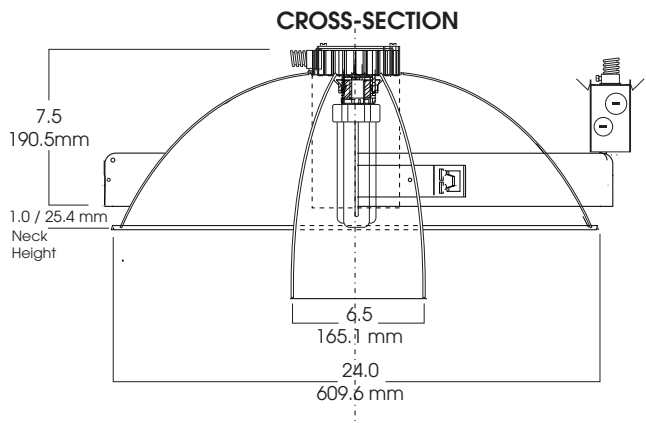

TOP VIEW

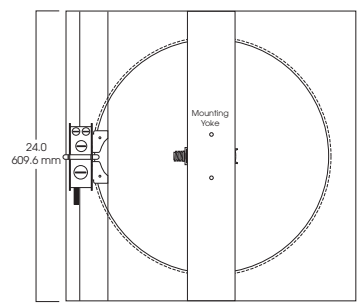

SERIES	WATTS	BALLAST	OPTIONS	TRIM / FINISH	GLASS OPTIONS
SG22V-	118	EX -Electronic, multi-volt 120v thru 277v	CB24 -C-Channel bars 1-470	AR2106WH -Matte White Finish	FG7WH -White/Cased Frosted Glass
Spectrum	126	DA1 -Advance Mark 10™ powerline dimming, 120v	EM -Emergency battery pack 1-420		FG7AO -Amber / Orange Cased Glass
Gold	132	DA2 -Advance Mark 10™ powerline dimming, 277v	FS -Fuse holder and fuse		FG7SB -Sapphire Blue Cased Glass
2' X 2' DOME	142	DAM7 -Advance Mark 7™ 0-10v dimming, 120v thru 277v	TBC -T-bar clips 1-475		FG7FR -Fire Red Cased Glass
Vertical lamp	157	DL1 -Lutron Compact SETM 120v (min. dimming level 5%) ¹	GC -Grid Ceiling, With Matte White Pan		FG7** -Clear Glass Available on Special Request
		DL2 -Lutron Compact SETM 277v (min. dimming level 5%) ¹			FF -Full Frost (for frosted outside of colored glass)
		¹ Not available for 57w lamp		Note: White flange is standard.	7x10 Pendant Reflector
SG22V	132	EX		AR2106MW	FG7WH

Dimensions shown are nominal. Spectrum Lighting is continually improving products and reserves the right to make changes that will not alter performance or appearance with or without written notice.



PROJECT:	TYPE:
CAT.	

