



# 6" HORIZONTAL FLUORESCENT DECORATIVE SQUARE APERTURE


2 x 42 WATT MAX




## FEATURES & SPECIFICATIONS:

- EFEX<sup>2</sup> Series CF Square aperture. Fixture features shallow plenum and deep cutoff.
- Intended for Non-IC new construction. For IC applications, refer to page 1-400.
- Frame constructed of 20 ga. galvanized steel.
- Supplied with 27" long, heavy ga. galvanized steel bar hangers.
- Ballasts shall be integrally mounted, electronic sound rated "A", Class P, multi-volt 120v - 277v.
- Upper reflector shall be high purity specular aluminum.
- UL Listed for Damp Locations.
- For options detail, see page numbers listed below.


Max Ceiling Thickness: 1.0 (25.4 mm)  
Ceiling Cutout: 7.0<sup>2</sup> (177.8 mm)<sup>2</sup>  
Fixture Weight: 10.5 lbs

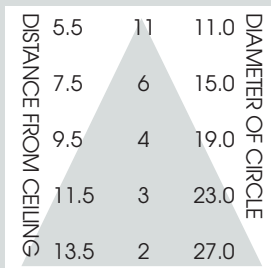


CONE OF LIGHT

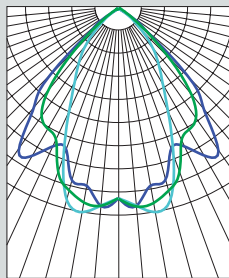

6HSQ118w-Efficiency: 43.0%  
Spacing: 1.41

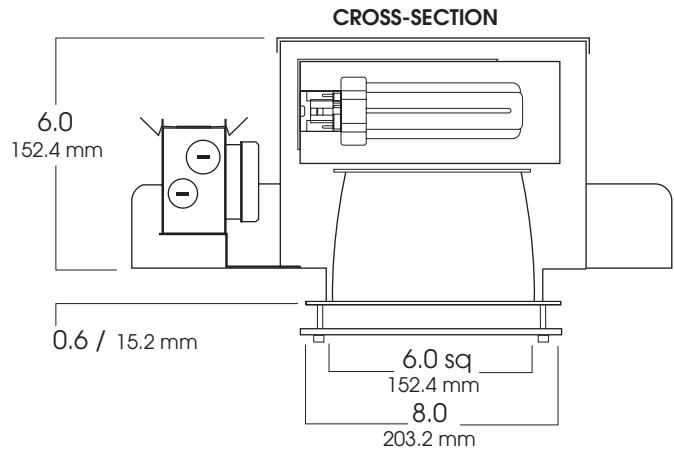

TOP VIEW

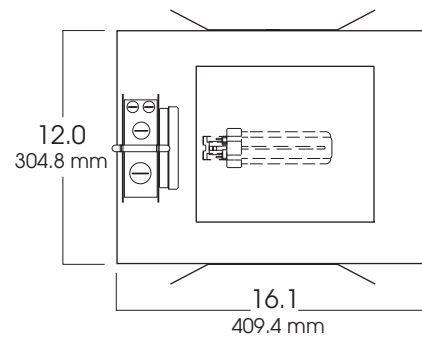

SERIES	WATTS	BALLAST	OPTIONS	TRIM / FINISH	TRIM OPTIONS
<b>SG6HSQ-</b> Spectrum Gold 6" Horizontal Square	<b>(1 or 2) 18</b> <b>(1 or 2) 26</b> <b>(1 or 2) 32</b> <b>(1 or 2) 42</b>	<b>EX</b> -Electronic, multi-volt 120v thru 277v <b>DA1</b> -Advance Mark 10™ powerline dimming, 120v <b>DA2</b> -Advance Mark 10™ powerline dimming, 277v <b>DAM7</b> -Advance Mark 7™ 0-10v dimming, 120v thru 277v <b>DL1</b> -Lutron Compact SE™ 120v (min. dimming level 5%) <b>DL2</b> -Lutron Compact SE™ 277v (min. dimming level 5%)	<b>CB24</b> -C-Channel bars 1-470 <b>CCEA</b> -Chicago Ceiling Plenum CCEA 1-480 <b>CR</b> -Corrosion Resistant 1-460 <b>EM</b> -Emergency battery pack 1-420 <b>FS</b> -Fuse holder and fuse <b>IC</b> -Insulation Contact 1-400 <b>PR</b> -Plaster Ring 1-430 <b>RM</b> -Remodeler Housing 1-450 <b>TBC</b> -T-bar clips 1-475 <b>TST</b> -Twist-Lok Socket 1-425	<b>AR0606-SG</b> -Semi-Diffuse Low Iridescent (standard) <b>GM</b> -Corrugated Soft Glow <b>GO</b> -Gold Alzak <b>MB</b> -Matte Black <b>MW</b> -Matte White <b>PW</b> -Pewter Alzak <b>UM</b> -Umber Alzak <b>WE</b> -Wheat Alzak <b>BF</b> -Black Flange <b>WF</b> -White Flange <b>CC</b> -Custom Color  Note: Polished flange is standard.	<b>1TSQFG</b> -Frosted Soda Lime Drop Tier Glass (standard) <b>1TSQFA</b> -Frosted Drop Tier Acrylic <b>1TSQFG-BORO</b> -Frosted Borosilicate Drop Tier Glass <b>GS</b> -Gasket
<b>SG6HSQ</b>	<b>242</b>	<b>EX</b>	<b>EM/</b>	<b>AR0606 SG</b>	<b>1TSQFG</b>

Dimensions shown are nominal. Spectrum Lighting is continually improving products and reserves the right to make changes that will not alter performance or appearance with or without written notice.



<b>PROJECT:</b>	<b>TYPE:</b>
<b>CAT. NO.:</b>	

