


**INFINIUM™ PULSE TECH**  
**SELF-COOLING LED**  
 14 WATT MAXIMUM

**SLT33**  
**SPECTRUM**  
 INFINIUM™



**PRODUCT INFORMATION:**

- Infinium™ *Pulse Tech* features integral air-cooling technology.
- Single high powered LED produces point source quality and luminaire focus.
- 50,000 hours rated lamp life means low maintenance.
- High flux density 14w LED.
- All LED modules are replaceable and upgradable.
- Equivalent to 50w MR16, 20w Metal Halide, and 75w incandescent lamps.
- Manufactured and tested to UL Standard No. 8750.

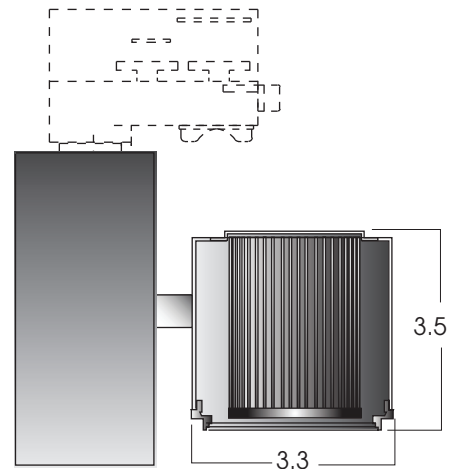

**GES66/TEK100/HTEK100**  
 adaptors for use with  
**GET/TEK/HTEK/XTS TRACK**

KELVIN°	WATTAGE	LUMENS
27K°	14W	350
31K°	14W	375
35K°	14W	400
41K°	14W	480
55K°	14W	560

MODEL	LED	KELVIN	BEAM	DRIVER	ADAPTOR	FINISH	ACCESSORIES*
<b>SLT33LED-</b> Spectrum Lighting Infinium™ <i>Pulse Tech</i> LED	<b>14w</b>	<b>27K</b> -2700° K <b>29K</b> -2900° K <b>31K</b> -3100° K <b>41K</b> -4100° K <b>55K</b> -5500° K	<b>ND</b> (12°) <b>MD</b> (22°) <b>WD</b> (38°)	<b>E1</b> -Electronic 120v <b>E2</b> -Electronic 277v  Dimming Not Available	<b>GES66</b> -Works with GET Track <b>TEK100</b> -Works with TEK Track <b>HTEK100</b> -Works with HTEK Track <b>GA100</b> -Works with XTS Track <b>GES70</b> -Monopoint Canopy <b>PC1</b> -Pipe Clamp	<b>MT</b> -Mini Textured Silver <b>MB</b> -Matte Black <b>MW</b> -Matte White <b>CC</b> -Custom Color  *See SPECTRUM color chart for a full list of colors  ( <b>MT/MB</b> )-with black adaptor & cord ( <b>MW</b> )-with white adaptor & cord)	<b>FG</b> -Frosted Face Lens <b>LN20</b> -Lens (see lens pages) <b>SN20</b> -Snoot <b>HL20</b> -Hex Louver  *Accessory finish will match fixture.
<b>SLT33LED</b>	<b>14W</b>	<b>31K</b>	<b>MD</b>	<b>E1</b>	<b>TEK100</b>	<b>MT</b>	<b>HL20</b>

Dimensions shown are nominal. Spectrum Lighting is continually improving products and reserves the right to make changes that will not alter performance or appearance with or without written notice.



<b>PROJECT:</b>	<b>TYPE:</b>
<b>CAT. NO.:</b>	

