


**SPECLUME
ACRYLIC CYLINDER
ACRYLIC / ALUMINUM**
CF / INC / MH / LED

**SL
SERIES**



PRODUCT INFORMATION:

- AF Series Frosted Acrylic Cylinder, with decorative top and bottom trim.
- Available in Five Sizes.
- Top closed with open bottom.
- Suitable for damp location.
- Manufactured and tested to UL standard No. 1598/ETL Listed.

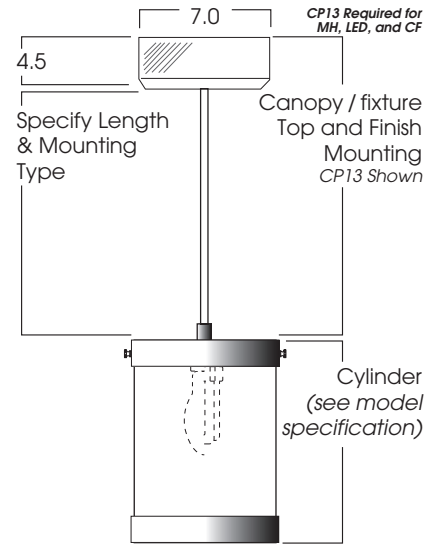

MODEL	LAMPS	WATTS	BALLAST	MOUNTING	MOUNTING FINISH	CYLINDER FINISH
AF0609- Speclume Series, 6 x 9"	CF **	18, 26, 32, 42* (TRT Only)	E1 -Electronic, 120v	CD* -Cord and Cable Mount CDCC* -Coil Cord and Cable Mount	PT -Platinum Silver (Gray Cord / Stem)	PT -Platinum Silver MB -Matte Black
AF0618- Speclume Series, 6 x 18"	INC	100w	E2 -Electronic, 277v	HM* -Hang Straight Pendant HMAT* -Adjustable Length Hang Straight Pendant	MB -Matte Black (Black Cord / Stem)	MW -Matte White BA -Brushed Aluminum
AF0624- Speclume Series, 6 x 24"	MH **	20, 39 (PAR 20)	DA1 -Advance Mark 10™ powerline dimming, 120v ¹ (CF Only)	PM* -Pendant/Straight Mount CP13 -Ballast Housing	MW -Matte White (White Cord / Stem)	CC -Custom Color (see color chart)
AF0810- Speclume Series, 8 x 10"	LED **	9w3K	DA2 -Advance Mark 10™ powerline dimming, 277v ¹ (CF Only)		BA -Brushed Aluminum (Gray Cord / Stem)	OPTIONAL LOWER LENS
AF0820- Speclume Series, 8 x 20"					CC -Custom Color (see color chart)	GL6 -6" Clear Glass Lower Lens FG6 -6" Frosted Glass Lower Lens PG6 -6" Prismatic Glass Lower Lens TOP -Option for Uplight GL8 -8" Clear Glass Lower Lens FG8 -8" Frosted Glass Lower Lens PG8 -8" Prismatic Glass Lower Lens
AF0810	**Requires CP13 CF	*Runs 26, 32,42w Lamp 26	E1	* Specify Length in inches **12" or 36" lengths only See Speclume Mounting Page CD36 / CP13	BA	PT FG6

Dimensions shown are nominal. Spectrum Lighting is continually improving products and reserves the right to make changes that will not alter performance or appearance with or without written notice.



PROJECT:	TYPE:
CAT. NO.:	

