


**SPECLUME  
PERFORATED CYLINDER  
ALUMINUM**  
CF / INC / MH / LED

**SL  
SERIES**



**PRODUCT INFORMATION:**

- PF Series aluminum cylinder with perforated edge detail for sparkle effect.
- Top closed with open bottom.
- Suitable for use in damp location.
- Manufactured and tested to UL standard No. 1598.

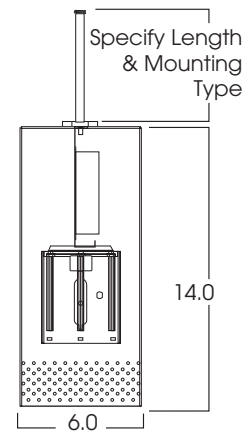

MODEL	LAMPS	WATTS	BALLAST	MOUNTING	MOUNTING FINISH	CYLINDER FINISH
<b>PF0614-</b> Speculume Series, 6 x 14"	<b>CF **</b>	<b>18, 26, 32, 42*</b>	<b>E1</b> -Electronic, 120v	<b>CD*</b> -Cord and Cable Mount	<b>PT</b> -Platinum Silver (Gray Cord / Stem)	<b>PT</b> -Platinum Silver
	<b>INC</b>	<b>100w</b>	<b>E2</b> -Electronic, 277v	<b>CDCC*</b> -Coil Cord and Cable Mount	<b>MB</b> -Matte Black (Black Cord / Stem)	<b>MB</b> -Matte Black
	<b>MH **</b>	<b>20, 39 (PAR 20)</b>	<b>DA1</b> -Advance Mark 10™ powerline dimming, 120v <sup>1</sup> (CF Only)	<b>HM*</b> -Hang Straight Pendant	<b>MW</b> -Matte White (White Cord / Stem)	<b>MW</b> -Matte White
	<b>LED **</b>	<b>14w3K</b>	<b>DA2</b> -Advance Mark 10™ powerline dimming, 277v <sup>1</sup> (CF Only)	<b>HMAT*</b> -Adjustable Length Hang Straight Pendant	<b>BA</b> -Brushed Aluminum (Gray Cord / Stem)	<b>BA</b> -Brushed Aluminum
				<b>PM*</b> -Pendant/Straight Mount	<b>CC</b> -Custom Color (see color chart)	<b>CC</b> -Custom Color (see color chart)
				<b>CP13</b> -Ballast Housing		
	**Requires CP13	*Runs 26, 32,42w Lamp		* Specify Length in inches **12" or 36" lengths only See Speculume Mounting Page		
<b>PF0614</b>	<b>CF</b>	<b>26</b>	<b>E1</b>	<b>CD36 / CP13</b>	<b>BA</b>	<b>PT</b>

Dimensions shown are nominal. Spectrum Lighting is continually improving products and reserves the right to make changes that will not alter performance or appearance with or without written notice.



<b>PROJECT:</b>	<b>TYPE:</b>
<b>CAT. NO.:</b>	

