

SPECLUME REFLECTIVE DOWNLIGHT ALUMINUM REFLECTOR


CF / INC / MH / LED

SL SERIES



PRODUCT INFORMATION:

- 26" diameter pendant, spun aluminum reflector with wide downlight distribution.
- Designed for indirect lighting in high ceiling applications.
- 20 powdercoat colors available.
- Choice of mounting options and mounting systems.
- Manufactured and tested to UL standard No. 1589

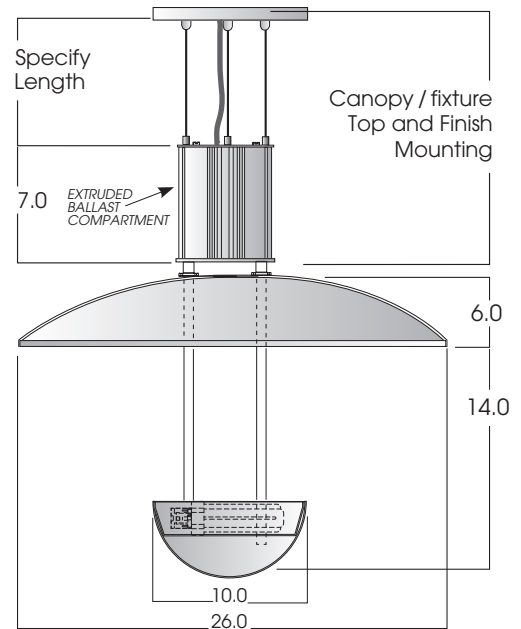

| MODEL | LAMPS | WATTS | BALLAST | OPTIONS | MOUNTING | FINISH |
|---|--------------------|--------------------------|---|--|---|--|
| RD26- Speculume Pendant Series, 26" Reflective Downlight | CF ** | 18, 26, 32, 42* | E1 -Electronic, 120v E2 -Electronic, 277v | FS -Fuse holder and fuse | HM* -Hang Straight Swivel Fitting | GB -Gloss White GW -Gloss Black |
| | INC | 100w | DA1 -Advance Mark 10™ powerline dimming, 120v ¹ (CF Only) | EM -Emergency Ballast (remote) | CD4X* -Cable from each of the 4 Rods | BZ -Bronze SI -Silver |
| | MH ** | 20, 39 (PAR 20) | DA2 -Advance Mark 10™ powerline dimming, 277v ¹ (CF Only) | | | TW -Textured White TB -Textured Black |
| | LED ** | 14w3K | | | | MT -Mini Tek White BT -Mini Tek Black |
| | **Requires CP13 | *Runs 26, 32,42w Lamp | | | | <i>Inside Gloss White Powder Coat</i> |
| RD26 | CF | 26 | E1 | EM/ | CD4X 36 | TW |
| | | | | | * Specify Length in inches See Speculume Mounting Page | OC -Specify for Outside/Inside Same Color |

Dimensions shown are nominal. Spectrum Lighting is continually improving products and reserves the right to make changes that will not alter performance or appearance with or without written notice.



| | |
|------------------|--------------|
| PROJECT: | TYPE: |
| CAT. NO.: | |

