


6" VERTICAL FLUORESCENT OPEN/INSULATED CEILING 26 WATT MAX

6000FIC
SPECTRUM
SILVER SERIES™




- Insulated Ceiling/Air Tight 6" downlight.
- Open reflector
- Remodel options.
- #20 gauge galvanized frame.
- 12" bar hangers expandable to 24", standard.
- .0625 spun aluminum reflector.
- Junction box pre-wired, grounded.
- Electronic ballast 120/277v standard.
- Ballast serviceable from the ceiling aperture.
- Suitable for use in damp location.
- UL listed to standard no. 1598


SIDE VIEW

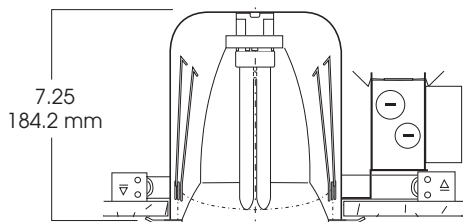

TOP VIEW

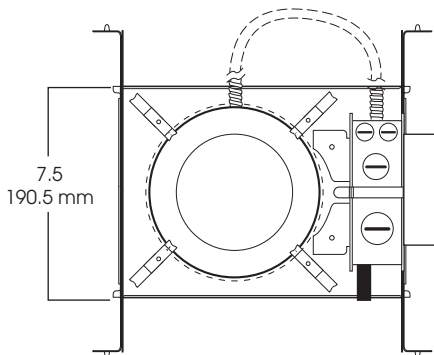

RM

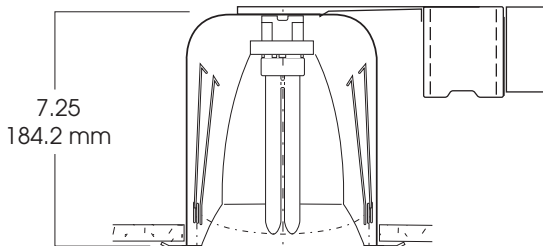





1. SPECIFY FRAME

FRAME	LAMP	BALLAST	OPTIONS
SP6000FIC- Spectrum Silver 6" Vertical Fluorescent insulated Ceiling	1x13w 1x18w 1x26w	EX -Electronic 120/277 (standard)	FS -Fuse holder and fuse RM -Remodel Housing BH27 -27" mounting bars
SP6000FICAT		EX	EM/

2. SPECIFY TRIM

DECORATIVE TRIM OPTIONS



TRIM #	FINISH	OPTIONS
6610- Open Trim	CL -Clear Alzak GO -Gold Alzak BL -Black Finish WH -White Finish	BF -Black Flange BB -Black Micro Baffle
6610 CL		 6610 CL  6610 DO  6610 FL

3. FINISHED ORDER/SPECIFICATION

SP6000FICAT / 6610 CL

Dimensions shown are nominal. Spectrum Lighting is continually improving products and reserves the right to make changes that will not alter performance or appearance with or without written notice.



PROJECT:	TYPE:
CAT. NO.:	

