





**6" VERTICAL FLUORESCENT
OPEN INSULATED CEILING
1 x 42 WATT MAX**

6050FIC
SERIES

SIDE VIEW

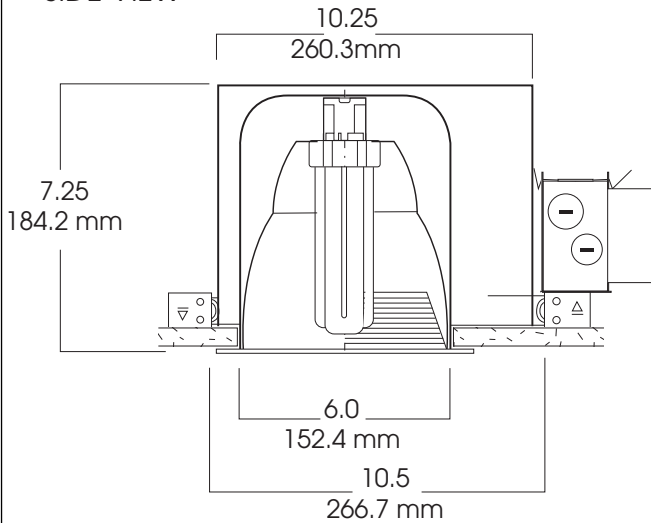

TOP VIEW

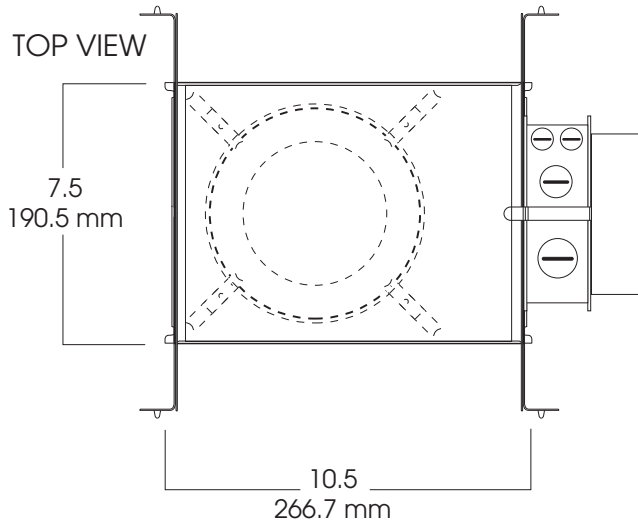

FIXTURE SPECIFICATIONS

FIXTURE	#LAMP	WATTS	BALLAST TYPE
SP6050FIC	1	26	EX - Electronic 120/277 (standard)
		32	
		42	


TRIM SPECIFICATIONS



TRIM NO:
6310

FINISH:

- CL**- Clear Alzak
- GO**-Gold Alzak
- BL**- Black Finish
- WH**- White Finish



TRIM OPTIONS

- BF**- Black Flange
- BB**- Black Micro Baffle
- WB**- White Micro Baffle

TYPICAL ORDER

Line item 1 (FRAME): **SP66050FIC142EX**
Line Item 2 (TRIM): **6310 CL**

PRODUCT INFORMATION

- Insulated Ceiling, Air Tight, compact fluorescent fixture from Spectrum Lighting. **MAXIMUM WATTAGE 1X42.**
- Clear Alzak reflector, white flange. (standard)
- 20 gauge galvanized frame.
- 12" bar hangers expandable to 24" standard
- Junction box pre-wired, grounded.
- Electronic ballast 120/277v standard..
- Suitable for use in damp location.
- UL listed.

FRAME OPTIONS

- AT**- Airtight
- FS** - Fusing
- BH27** - 27" Mounting Bars (2 Per Set).

TRIM OPTIONS

- GS** - Gasket (For Reflector).

SUBMITTAL WORKSHEET

FIXTURE NO.

FRAME-IN-KIT NO.

FIXTURE TYPE

2-703A

