


7" HORIZONTAL FLUORESCENT SPREAD LENS WALL WASH 2 x 26 WATT / 1 x 42 WATT MAX

LHF
SPECTRUM
SILVER SERIES™




- 7" spread lens wall wash.
- 20 gauge galvanized steel frame.
- 12" bar hangers expandable to 24" standard.
- .0625 spun aluminum reflector.
- Junction box pre-wired, grounded.
- Electronic ballast 120/277V standard.
- Ballast serviceable from the ceiling aperture.
- Suitable for use in damp location. Lensed fixture has Wet Location option.
- UL listed to standard no. 1598.

SIDE VIEW

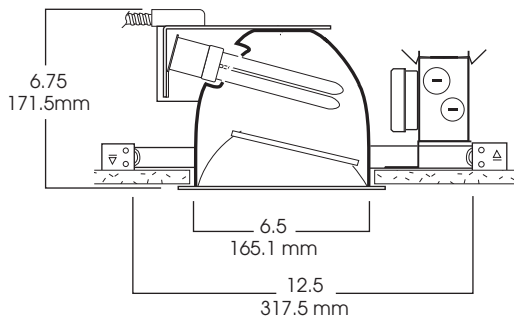

TOP VIEW

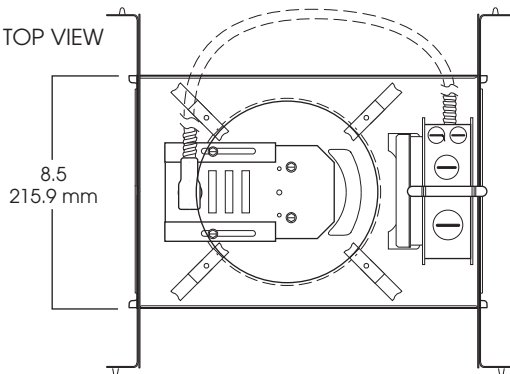

1. SPECIFY FRAME

FRAME	WATTS	BALLAST	OPTIONS
SPL7HF	2 QUAD	EX -Electronic 120/277 (standard)	EM -Emergency battery pack (specify voltage)
Spectrum	13	DA1 -Advance Mark10™ dimming, 120v	FS -Fuse holder and fuse
Silver 7"	18	DA2 -Advance Mark 10™ powerline dimming, 277v	PR -Plaster ring (pg 1-430)
Horizontal	26	DM7 -Advance MK7 Dimming 120/277	RM -Remodler housing
	1 LAMP TT	DL1 -Lutron Compact SE™ 120v (min. dimming level 5%) ¹	BH27 -27" mounting bar
	18	DL2 -Lutron Compact SE™ 277v (min. dimming level 5%) ¹	TBC -T-bar clip
	26		
	32		
	42		

SPL7HF


126

EX

EM/

2. SPECIFY TRIM

SPREAD LENS WALL WASH



TRIM #	FINISH	OPTIONS
7950	SG -Soft Glow	PG -Prismatic Glass lens (standard)
Lens	CL -Clear Alzak	
1/2 Quad	GO -Gold Alzak	
	HZ -Haze	SO -Micro Prism Solite Lens
7955	PW -Pewter	GS -Gasket
1TT	UM -Umber Alzak	
	WE -Wheat Alzak	
	BL -Black Finish	
	WH -White Finish	
	PF -Polished Flange	
	BF -Black Flange	

7955 SG

PG

3. FINISHED ORDER:

SPL7HF126EX/7955 SG PG

Dimensions shown are nominal. Spectrum Lighting is continually improving products and reserves the right to make changes that will not alter performance or appearance with or without written notice.



PROJECT:	TYPE:
CAT. NO.:	

