





**6" VERTICAL FLUORESCENT
REMODEL/INSULATED CEILING
1 x 26 WATT MAX**

RM6000FIC
SERIES

SIDE VIEW

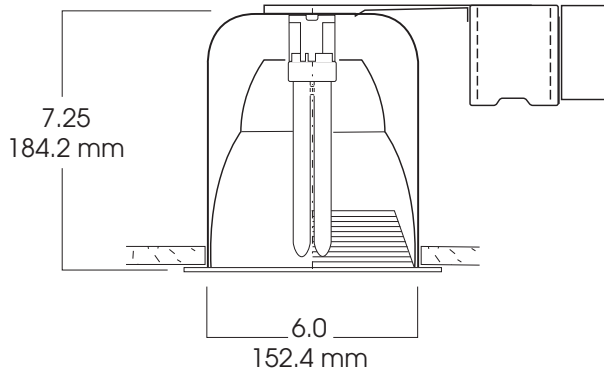

TOP VIEW

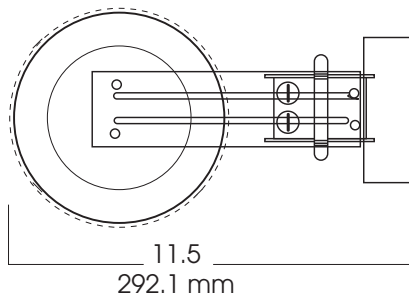

FIXTURE SPECIFICATIONS

FIXTURE	#LAMP	WATTS	BALLAST TYPE
SPRM6000VIC	1	13	EX - Electronic 120/277 (standard)
		18	
		26	


TRIM SPECIFICATIONS



TRIM NO:
6310

FINISH:

- CL- Clear Alzak
- GO- Gold Alzak
- BL- Black Finish
- WH- White Finish



TRIM OPTIONS

- BF- Black Flange
- BB- Black Micro Baffle
- WB- White Micro Baffle

TYPICAL ORDER

Line item 1 (FRAME): **SPRM6000FIC126EX**
Line Item 2 (TRIM): **6310 CL**

PRODUCT INFORMATION

- Fixture designed for remodeling/retrofit applications.
- Insulated Ceiling, Air Tight, compact fluorescent fixture from Spectrum Lighting. **MAXIMUM WATTAGE 1X26.**
- Clear Alzak reflector, white flange. (standard)
- Junction box pre-wired, grounded.
- Electronic ballast 120/277v standard..
- Suitable for use in damp location.
- UL listed.

FRAME OPTIONS

FS - Fusing

TRIM OPTIONS

GS - Gasket (For Reflector).

SUBMITTAL WORKSHEET

FIXTURE NO.

FRAME-IN-KIT NO.

FIXTURE TYPE

2-703A

