



LINEAR VAPORTIGHT FLUORESCENT

UP TO (3) x 32 WATT T8 LAMPS
UP TO (3) x 54 WATT T5-HO LAMPS



PRODUCT INFORMATION:

- T8, T5, T5-HO lampping available.
- 5VA rated glass-fiber molded housing body with poured-in-place full perimeter gasket achieves IP67 rating.
- High-impact, UV stabilized DR linear ribbed acrylic diffusers are standard. Polycarbonate lenses are available.
- "Hands-Free" tethered gear tray allows ease of installation and wiring.
- High-Performance reflector available.
- Surface or Pendant ($\frac{1}{4}$ -20 all-thread) mounting available.
- Manufactured and tested to UL standard No. 1589.

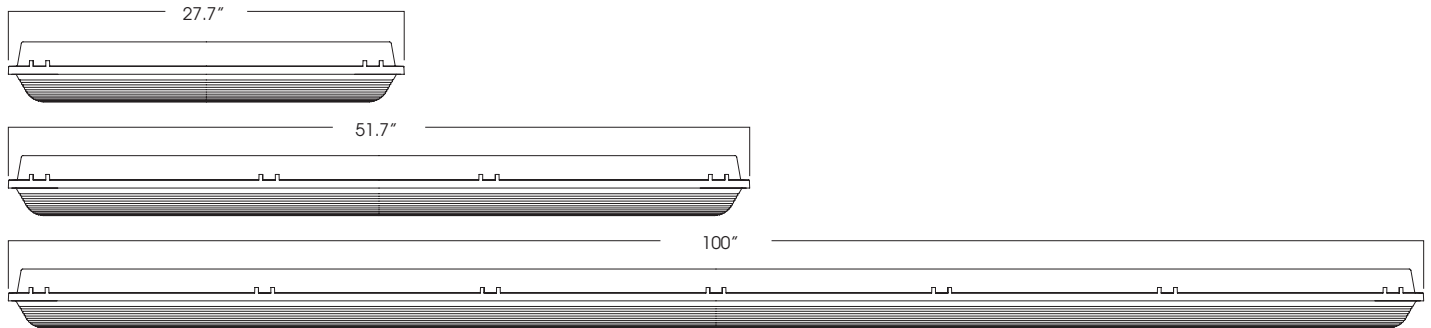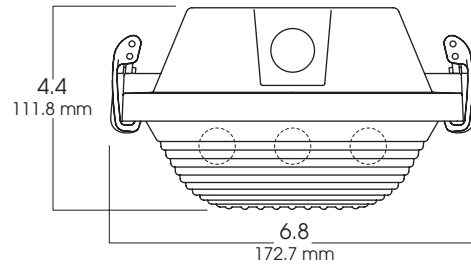

SERIES	WATTS	BALLAST	OPTIONS	MOUNTING
VT2	(1,2 or 3) 17w T8 (1,2 or 3) 14w T5 (1,2 or 3) 21w T5-HO	EX -Electronic 120v-277v Normal Power Factor (standard)	EM -Emergency battery pack 1-420 (specify voltage) FS -Fuse holder and fuse REF -Internal Performance Reflector	SM -Surface Mounted PM -Pendant Mounting Brackets ($\frac{1}{4}$ -20 all-thread)
VT4	(1,2 or 3) 32w T8 (1,2 or 3) 28w T5 (1,2 or 3) 54w T5-HO			
VT8	(2, 4 or 6) 32w T8 (2, 4 or 6) 28w T5 (2, 4 or 6) 54w T5-HO **Tandem**			
VT4	232T8	EX	REF	PM

Dimensions shown are nominal. Spectrum Lighting is continually improving products and reserves the right to make changes that will not alter performance or appearance with or without written notice.



PROJECT:	TYPE:
CAT. NO.:	

