


SPECTRUM "LumenMax" DCHRM CF SERIES 8X42 WATTS MAXIMUM





FEATURES:

- The "Lumen Max" CF Series offers unique alternative to Metal Halide.
- DCHRM style is decorative and compact.
- Instant on/off. Integral 750 lumen EM available
- Stepped dimming using multiple circuit wiring.
- Energy-efficient lamps and ballasts.
- 86.9% efficient (8-42 watt PLT in 22" profile).
- Lexalite® prismatic refractor allows up-light component. Opal and etched diffuse finishes are available.
- Wide choice of mounting options
- Choose from variety lenses or wire guards.
- 20 Powdercoat colors available, **Gloss White** is standard.
- Damp location listed.
- UL Listed
- Made in USA

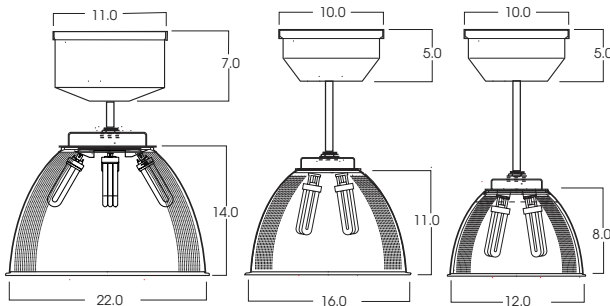

DIFFUSER OPTIONS

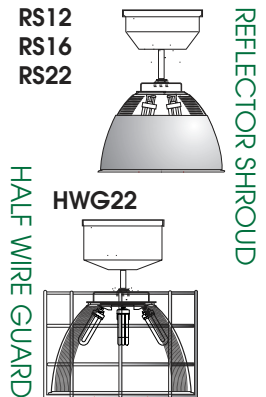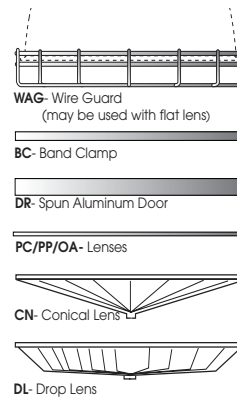

MODEL	LAMPS	WATTAGE	ELECTRICAL	MOUNTING	REFRACTOR	DIFFUSER OPTIONS
PRDCHRM12- 12" X 8" 3 LAMP 42W MAX	CF1 CF2 CF3	18 - 18 W 26 - 26 W 32 - 32 W	2CIR - 2 Circuit 3CIR - 3 Circuit 4CIR - 4 Circuit	HM* - Hang-straight Pendant. 3/8 IPS	PR12 - Clear 16 Prismatic 22	WAG12 - Wire Guard 16 22
PRDCHRM16- 16" X 11" 6 LAMP 42W MAX 4 LAMP 57W MAX	CF4 CF6 CF8	42 - 42 W 57 - 57 W 70 - 70 W	FS - Fusing EM - Emergency 94 (750 lumens) Integral up to 42W	PM* - Rigid Pendant 3/8 IPS	OP12 - Opal Etch 16 22	HWG22 - Half Wire Guard 22
PRDCHRM22 22" X 14" 8 LAMP 42W MAX 4 LAMP 57W MAX 4 LAMP 70W MAX		BALLAST EX - Electronic 120/277 Standard	TST - Twist-Lok Socket	CD* - Aircraft Cable, Straight Cord SC1 - Safety Cable HC - Hook & Cord NM2 - 1/2" Hub NM3 - 3/4" Hub * Specify length in 6" increments	DF12 - Diffuse 16 22	DOOR12 - Spun Aluminum Door 16 22
EXAMPLE: PRDCHRM22	CF8	42EX/	2CIR/EM	/HM36	/PR22	/WAG22
						PP

PROJECT: _____ TYPE: _____
MODEL NO: _____



ARCHITECTURAL LIGHTING 994 Jefferson Street . Fall River, MA 02721 . 508.678.2303 FAX 508.678.2260