


REMOTE BALLAST HOUSINGS

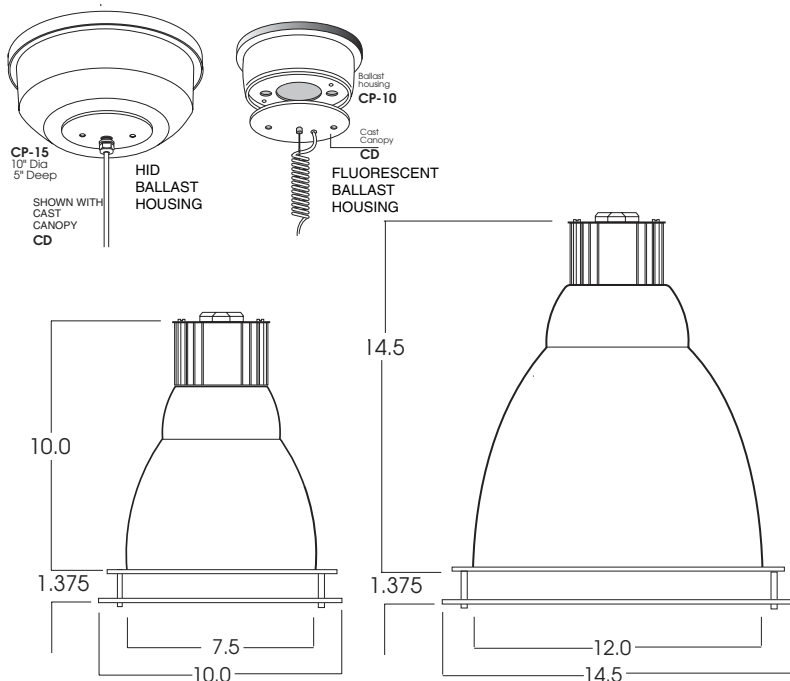

ORDER OPTIONS

MODEL NO.	DIAMETER	HEIGHT	INCANDESCENT	FLUORESCENT CP10 Ballast in Canopy	HID Remote Ballast housing
SP-RP0808*	8.5	10.0	150W	1 x 13W-42W	35W - 100W
SP-RP1014*	10.0	12.0	200W	1 or 2 13W-42W	35W - 150W
SP-RP1214*	12.0	14.0	300W	1 or 2 13W-57W	35W - 175W

* Use **CF** for Compact Fluorescent
 * Use **INC** for Incandescent
 * Use **MH** for Metal Halide
 **Clear and colored glass available, consult the factory.


ORDER EXAMPLE:
 SPRP1214MH250H1/CP15/CD/1TCFG/.

PRODUCT INFORMATION

- Reflector Pendant with the addition of an elegant trim tier is transformed from the attractive to the elegant.
- Shade of spun heavy gauge aluminum. Tier of frosted soda lime tempered glass.
- Extruded aluminum socket holder/decor top.
- Choose from colored powder-coat finish or natural metal treatment. (Brushed aluminum is standard).
- Remote ballast compartments allow complete installation below ceiling level.
- Suitable for use in wet location.
- Made in U.S.A

OPTIONS

- CD-** Ceiling Mount Coil Cord and Aircraft Cable.
- CM-** Ceiling Mount/Cord
- HM-** Hang Straight Mount

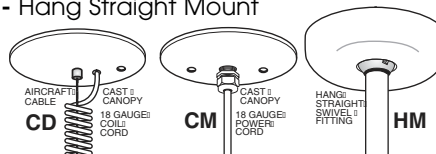

SUBMITTAL WORKSHEET

FIXTURE NO.:
 JOB NAME:
 FIXTURE TYPE