



**QUINCY SERIES**  
**INCANDESCENT**  
 SUBWAY LINE

PROJECT: \_\_\_\_\_  
 QUANTITY: \_\_\_\_\_ TYPE: \_\_\_\_\_



NL1008INC  
 PT - Platinum Silver

SERIES	ACCESSORIES <sup>1</sup>	MOUNTING <sup>3</sup>	FINISH <sup>6</sup>	WET KIT
NL1008INC	<b>ENCLOSURES</b> <b>FJ1<sup>2</sup></b> 3"x6.5" Frosted Glass <b>GJ1</b> 3"x6.5" Clear Glass <b>CG1</b> Cast Wire Guard	<b>WALL MOUNT</b> <b>CP6<sup>3</sup></b> Wall Pipe Interface <b>CP3</b> CP6 Decorative Cover <b>PA<sup>4</sup></b> Mounting Arm Style <b>SP90<sup>4</sup></b> Straight Arm	<b>MW<sup>7</sup></b> Matte White <b>MB<sup>7</sup></b> Matte Black <b>PT<sup>7</sup></b> Platinum Silver <b>CC</b> Custom Color  See Page 4 for Full Range of Color Options (83-90083)	<b>WLKA</b> Wet Location Kit
		<b>CEILING MOUNT</b> <b>HM<sup>5</sup></b> Hang Straight Pendant <b>AT<sup>5</sup></b> Adjustable Length Hang <b>PM<sup>5</sup></b> Straight Pendant <b>PM<sup>5</sup></b> Pendant/Straight Mount <b>CD<sup>5</sup></b> Cord and Cable Mount <b>CM<sup>5</sup></b> Cord Mount		

EXAMPLE: NL1008INC/FJ1CG1/CP6PA23/BZ


**NOTES:**  
 1 See Enclosures & Guards Page for Wire Guards and Additional Options    2 Standard Enclosure    3 See Mounting Pages Options and Details on Components and Finishes  
 4 See Mounting Page for Available Arm Options    5 Specify Length in Inches: See Mounting Page for Available Lengths    6 See Color Page for More Options/Consult Factory for Special Finishes    7 Standard Interior Finish





**QUINCY SERIES**  
**INCANDESCENT**  
 SUBWAY LINE

**HOUSING DIMENSIONS**



A	B
10.0	10.2
254.0 mm	259.1 mm

**APPLICATION**

Quincy series for decorative area lighting.

**FEATURES**

Spectrum Lighting's RLM Classics are inspired by vintage lighting fixtures redesigned with modern LED light sources and materials. The wide range of options for illumination, mounting, enclosures, guards and finishes allows for creative fixture specification and design. LED module and driver are serviceable for future replacement. Fixture available in three sizes.

**FINISH**

Multi-stage polyester powder-coat process applied on our dedicated paint lines. Variety of standard and custom finishes are available. Interior painted same finish as exterior.

**ELECTRONICS**

E26 Edison medium base 120V socket for incandescent or LED lamps.

**CONSTRUCTION**

Fixture shades are spun in our factory from 0.063 high purity aluminum. Wall mount canopies are die-cast aluminum with stainless steel hardware. Wall arms are formed 3/4 NPT aluminum pipe and may be field cut.

**CODE COMPLIANCE**

BAA compliant. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. Wet Location Option. Manufactured and tested to UL standards No. 1598/8750.

**ENCLOSURES**

**FJ1**  
3" FROSTED GLASS



**GJ1**  
3" CLEAR GLASS



**ENCLOSURE WIRE GUARDS**

**CG1**  
3" CAST GUARD




# MOUNTING & ACCESSORIES

SOME OPTIONS NOT AVAILABLE ON ALL FIXTURES. CONSULT SPECIFICATION SHEETS. SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION. NOTE: THIS IS TYPICAL OF RLM SPECIFICATION FOR MOUNTING. INDIVIDUAL FIXTURES OR PROJECTS MAY HAVE SPECIALIZED REQUIREMENTS.




## WALL MOUNTING

**CP6** - MOUNTS DIRECTLY TO WALL OR OCTAGON STYLE J-BOX



CUSTOM AND OTHER WALL ARMS AVAILABLE - CONTACT FACTORY. ARMS MAY BE FIELD CUT ON WALL SIDE - FIXTURE SIDE THREADED 3/4" NPT REQUIRES SEALANT FOR WET LOCATION.

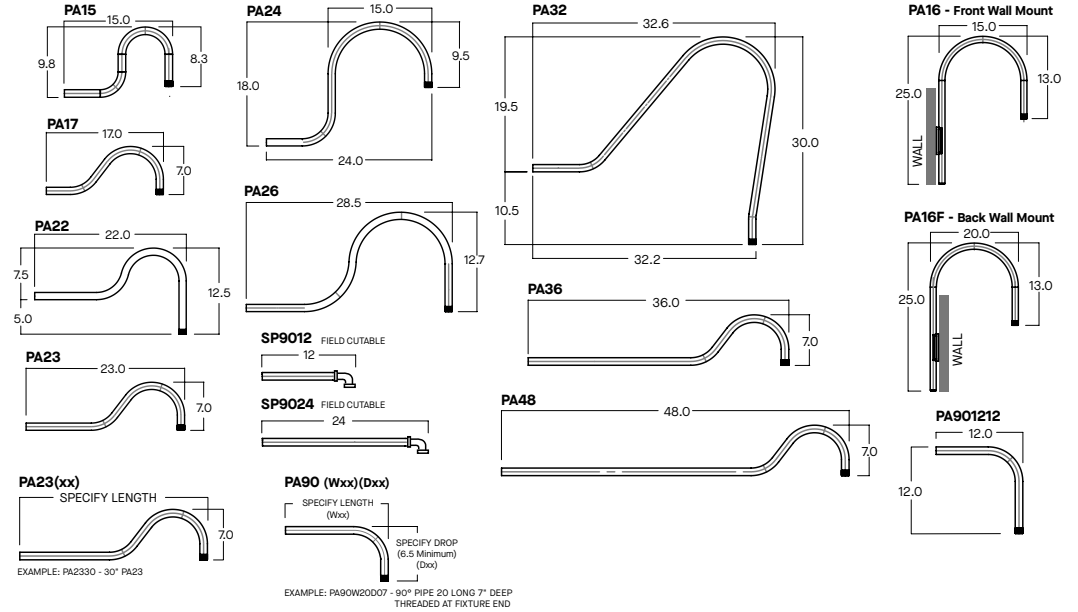

## CEILING MOUNTING

<p><b>HM*</b> HANG STRAIGHT 45° SWIVEL 5/8" OD STEM - 3/8" IP</p> <p>ORDER: HM (Length) SPECIFY LENGTH:  <b>HM3</b> - 3"    <b>HM24</b> - 24"  <b>HM6</b> - 6"    <b>HM36</b> - 36"  <b>HM12</b> - 12"    <b>HM48</b> - 48"  <b>HM18</b> - 18"    <b>HM72</b> - 72"  <b>HMLC(XX)</b> Custom Length (Specify in Inches)</p>	<p><b>PM*</b> RIGID PENDANT MOUNT RIGID 5/8" OD STEM - 3/8" IP</p> <p>ORDER: PM (Length) SPECIFY LENGTH:  <b>PM3</b> - 3"    <b>PM24</b> - 24"  <b>PM6</b> - 6"    <b>PM36</b> - 36"  <b>PM12</b> - 12"    <b>PM48</b> - 48"  <b>PM18</b> - 18"    <b>PM72</b> - 72"  <b>PMLC(XX)</b> Custom Length (Specify in Inches)</p>	<p><b>AT**</b> HANG STRAIGHT ALL THREAD 45° SWIVEL 5/8" OD STEM - 1/4" IP</p> <p>ORDER: AT (Length) SPECIFY LENGTH:  <b>AT12</b> - 12"    <b>AT48</b> - 48"  <b>AT24</b> - 24"    <b>AT60</b> - 60"  <b>AT36</b> - 36"    <b>AT72</b> - 72"  <small>FIELD CUT THREADED PIPE 3" LENGTH MINIMUM CUT PIPE COVERED W/ SHORTER STAIN THREADED PIPE SLIP PIPE COVER OVER THREADED PIPE</small></p>	<p><b>CD</b> CORD / CABLE MOUNT SJ CORD WITH 1/16 SS CABLE</p> <p>ORDER: CD (Length) SPECIFY LENGTH:  <b>CD36</b> - 36"  <b>CD72</b> - 72"  <b>CD144</b> - 144"  <b>CDLC(XX)</b> Custom Length (Specify in Inches)</p>	<p><b>CM</b> CORD MOUNT SJ CORD WITH STRAIN RELIEF</p> <p>ORDER: CM (Length) SPECIFY LENGTH:  <b>CM36</b> - 36"  <b>CM72</b> - 72"  <b>CM144</b> - 144"  <b>CMLC(XX)</b> Custom Length (Specify in Inches)</p>
--	---	--	--	--

\*MAXIMUM ONE PIECE STEM LENGTH IS 72". \*\*MAXIMUM ONE PIECE STEM LENGTH IS 36". LONGER LENGTHS ARE POSSIBLE USING MULTIPLE STEMS AND COUPLERS.  
 \*\*ORDER IN 12" INCREMENTS, ODD SIZES MAY BE FIELD CUT



# COLOR OPTIONS - POWDER COAT PAINT FINISHES

NOTE: NO PRINTED IMAGE CAN EQUAL THE EXACT COLOR OF FINISH ON METAL.  
SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION.



## STANDARD CORD / STEM / CANOPY FINISHES

FIXTURE COLOR	STANDARD CORD COLOR	STANDARD CANOPY / STEM COLOR
Matte White, Textured White	Matte White	Matte White
Gloss White	Matte White	Gloss White
Matte Black, Gloss Black, Textured Black	Matte Black	Matte Black
All Others	Matte Black	Same Color as Fixture
Custom Color	Contact Factory	Contact Factory

## PAINT TIMES


TIER	COST	AVERAGE PAINT TIME*
Tier 1 - Standard Finishes	\$	⓪
Tier 2 - Typical Finishes	\$\$	⓪⓪
Tier 3 - Special Metal Finishes	\$\$\$	⓪⓪⓪
Custom Color	Contact Factory	Contact Factory

\*CONTACT FACTORY FOR SPECIFIC PRODUCT LEAD TIMES


## TIER 1 - STANDARD FINISHES



## TIER 2 - TYPICAL FINISHES

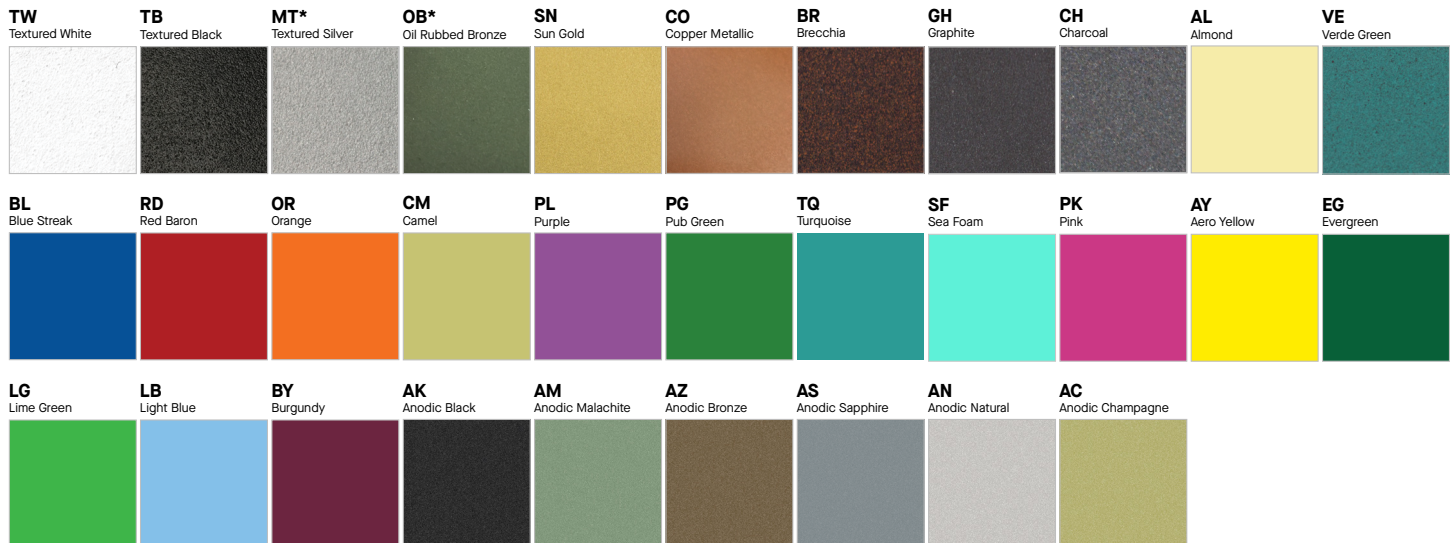

## TIER 3 - SPECIAL METAL FINISHES



## CUSTOM COLOR FINISHES

CONTACT FACTORY

**CC**  
Custom Color



\*UNAVAILABLE FOR WET LOCATION