

# TWY7


## 7" WALL WASH TRACK LUMINAIRE

Wide Flood 105° x 97° wall wash track or monopoint luminaire with up to 5200 lumens delivered.

LUMENS / WATTAGE DATA			
PART NUMBER	DELIVERED LUMENS	SYSTEM WATTS	LPW
TWY7 50L	5329	41	130

<sup>1</sup>Nominal Delivered Lumens at 50L 35K xx BET MW

PROJECT: \_\_\_\_\_  
 QUANTITY: \_\_\_\_\_ TYPE: \_\_\_\_\_

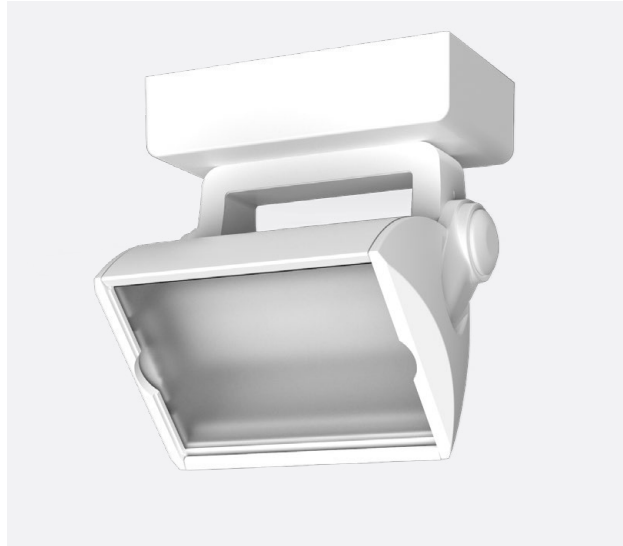

### SERIES

Wide Flood 105° x 97° wall wash track or monopoint luminaire with up to 5300 lumens delivered.

180° of vertical tilt with degree indexing.

350° horizontal rotation.

Soft etch lens for visual comfort and protection of LED from dust.

For use with Spectrum BET Basix track system (Juno Compatible)

### LISTING

cULus Certified. Suitable for dry locations.

### PRODUCT SELECTOR GUIDE

SERIES	FAMILY	LUMENS	CCT	DIMMING	ADAPTOR	FINISH	ACCESSORIES
TW	Y7	50L		E1	BET		+ <input type="text"/>

EXAMPLE

TW	Y7	50L	35K	E1	BET	MW	+ <input type="text"/>
----	----	-----	-----	----	-----	----	------------------------


SERIES	FAMILY	LUMENS	CCT		DIMMING	ADAPTOR	FINISH	ACCESSORIES				
			50L	5300 Lm				80 CRI	35K 3500K	BET	MW	ORDER SEPARATELY
TW	Y7	7" Wall Wash	50L	5300 Lm	E1	Electronic Driver, 120V	BET	Basix 1 CIR/1 NEUT 120V	MW	Matte White	BET70WH	Mono Point Canopy White
			<small><sup>1</sup>Nominal Delivered Lumens</small>									



COPYRIGHT 2022 SPECTRUM LIGHTING, INC.


FIXTURE DIMENSIONS

0° POSITION




A	B
76	4.84
194.1 mm	122.9 mm

45° TILT




A	B	C	D	E
4.84	3.14	8.25	1.77	3.86
122.9 mm	79.8 mm	209.6 mm	45.0 mm	98.0 mm

90° TILT



A	B
6.25	5.75
158.7 mm	145.9 mm

SIDE VIEW



A	B
6.89	7.11
175.0 mm	180.7 mm


FIXTURE ACCESSORIES

BET70WH  
MONO POINT CANOPY




TWY7 50L 35K xx BET MW


CANDLEPOWER CURVE TEST SP-01383	PERFORMANCE SUMMARY	REFERENCE DIAGRAM
------------------------------------	---------------------	-------------------

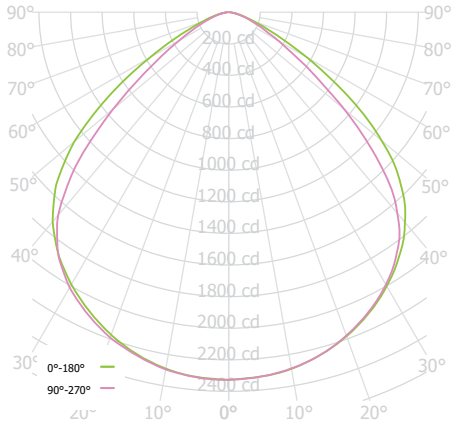


Delivered Lumens: 5329  
 Luminaire Watts: 41  
 LER: 129.98  
 CP at Odeg (Nadir): 2326  
 CRI: 80+  
 Lumen Multiplier: N/A, only 50L tested  
 CCT Multiplier: 40K x 1.0, 50K x 1.0

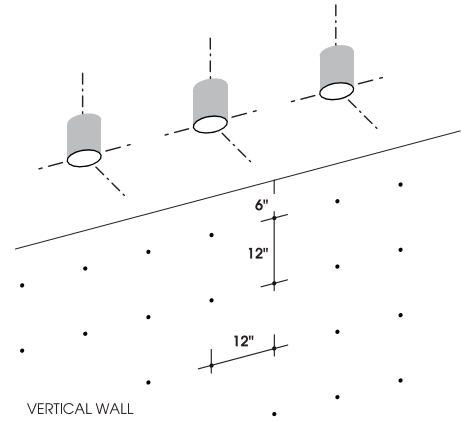


PERFORMANCE DATA - INITIAL ILLUMINATION (FOOTCANDLES) ON WALL - DIRECT LIGHT ONLY - AIMED AT 0°

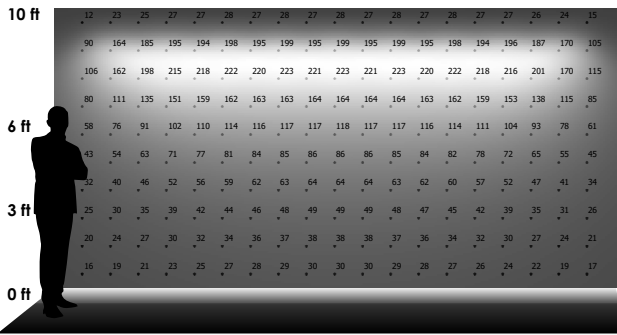


**9 LUMINAIRES**  
 2' - 0" away from wall  
 2' - 0" between luminaires

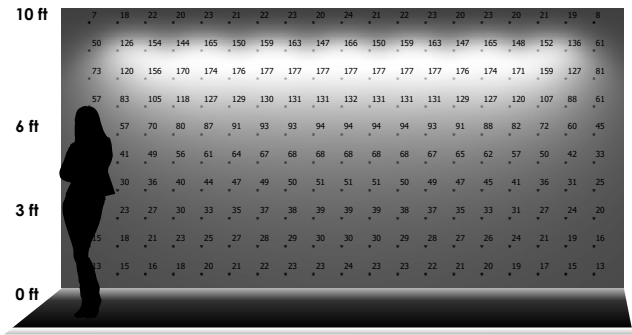

**7 LUMINAIRES**  
 2' - 6" away from wall  
 2' - 6" between luminaires

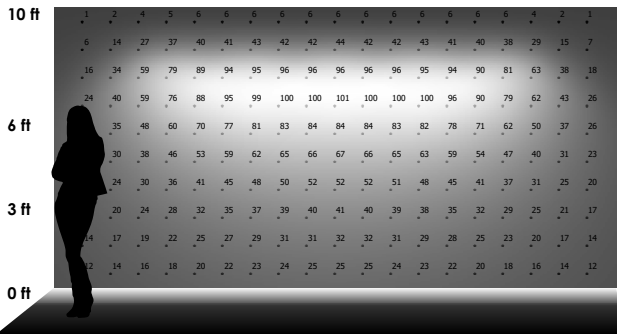

**5 LUMINAIRES**  
 3' - 0" away from wall

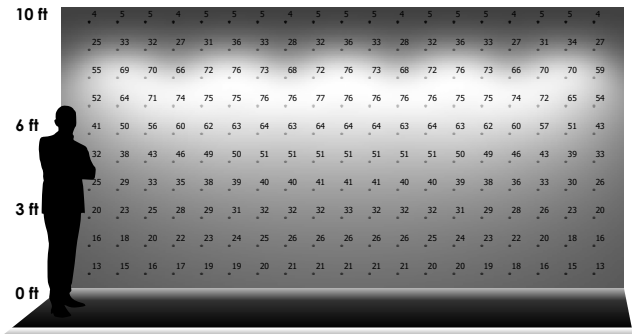

**5 LUMINAIRES**  
 3' - 0" away from wall