


INDIVIDUAL MODULES ROTATE 359° / TILT 35° WITH 1" PULL-DOWN

SEAM WELDED ALUMINUM FIXTURE

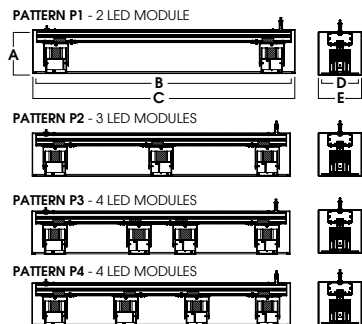

RCC848LEDXT Shown - Pattern P2 - 3 LED MODULES

PATTERN	#OF MODULES	A	B	C	D	E
P1	2	8.283	48.0	49.320	6.965	8.285
P2	3	8.283	48.0	49.320	6.965	8.285
P3	4	8.283	48.0	49.320	6.965	8.285
P4	4	8.283	48.0	49.320	6.965	8.285

# 8" MODULAR ACCENT LIGHT SUSPENDED / SURFACE

XT LED SERIES / MULTI-MODULE / 4 x 4000 LUMENS



## RCC848-LEDXT

### APPLICATION

RCC 8" x 48" series modular fixture for suspended / surface accent lighting.

### FEATURES

Surface mounted modular accent light. 3 LED fixture patterns available. Fixture modules (2 - 4 modules) rotate 359°, lock and tilt to 35° with 1" pull-down for optimal aiming. Quick change LED module, twist optics and choice of lenses for optimal job site flexibility. Quick access driver plate may be serviced from below fixture. Four available optics (10°-60°).

### FINISH

A variety of architectural powdercoat finishes for interior of fixture are available.

### ELECTRONICS

LED system features Xicato LED module with proprietary phosphor technology that provides consistent stable color with CCT control of +/- 100K over life of the light engine. Base CRI is 83 with 2-step MacAdam Ellipse binning. High CRI is 98 with 1 x 2-step MacAdam Ellipse binning. Variety of electronic 120V/277V and dimming drivers.

### CONSTRUCTION

Housing formed of #18 gauge 5052-H32 aluminum, seam welded and finished to specification. Fixture modules are die-cast and machined aluminum.

### CODE COMPLIANCE

BAA Compliant. Non-IC rated. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. Manufactured and tested to UL standards No. 1598/8750.

LUMENS / WATTAGE DATA PER MODULE				
PART NUMBER	SOURCE LUMENS <sup>1</sup>	DELIVERED LUMENS <sup>2</sup>	SYSTEM WATTS <sup>3</sup>	LPW
RCC848P2LEDXT10L	1000	864	9.1	95
RCC848P2LEDXT13L	1300	1164	13.0	90
RCC848P2LEDXT20L	2000	1791	21.7	83
RCC848P2LEDXT30L	3000	2687	32.6	82
RCC848P2LEDXT40L	4000	3448	37.9	91

Note: 98 CRI (Artist) operates at higher wattage than 83 CRI. In order to have equivalent source lumens, comparatively, as listed below.

SERIES	PATTERN	LUMENS <sup>1</sup>	CCT	BEAM	DRIVER / VOLTAGE <sup>7</sup>	OPTIONS <sup>8</sup>	INTERIOR	MOUNTING <sup>10</sup>	FINISHES <sup>12</sup>	
RCC848 Up to 4 Modules	P1 2 Module	LEDXT10L	1000 Lm	83 CRI	XN <sup>6</sup> 10°	EX Electronic Driver, 120V/277V	LENS SO35 Solite Diffusion GL35 Clear FG35 Frosted SN35 Snoot HL35 Hex Louver LN35 <sup>9</sup> Color Lens	MWI White MBI Black PTI Platinum BZI Bronze CCI Custom Color	2XHM <sup>11</sup> Hang Straight Pendant 3/8 IPS 2XPM <sup>11</sup> Rigid Pendant 3/8 IPS 2XCD <sup>11</sup> Aircraft Cable, Straight Cord SM Surface Mount SC1 Safety Cable	MW <sup>13</sup> Matte White MB <sup>13</sup> Matte Black PT <sup>13</sup> Platinum Silver BZ Bronze CH Charcoal TW Textured White TB Textured Black MT Textured Silver GH Graphite SN Sun Gold AC Champagne AN Anodic Natural CN Caramel CC Custom Color
		LEDXT13L	1300 Lm	27K 2700K	ND 26°	DS10X 10% 0-10V, 120V/277V				
	P2 3 Modules	LEDXT20L	2000 Lm	30K 3000K	MD 48°	DO10X 1% 0-10V, 120V/277V	OPTIONS EMRM Emergency Battery FS Fusing			
		LEDXT30L <sup>4</sup>	3000 Lm	35K 3500K	WD 60°	DS2W1 1%, ELV/MLV, 120V DLTE1 1%, Lutron® 2-Wire Forward Phase, 120V DL3EX 1% Lutron® EcoSystem® Fade, 120V/277V				
	P3 4 Modules	LEDXT40L <sup>4</sup>	4000 Lm	40K 4000K		EL10X 1%, eldoLED, 120V/277V				
			98 CRI ARTIST <sup>9</sup>			ED01X 0.1%, eldoLED, 120V/277V				
	P4 4 Modules		27HK 2700K			DALIX DALI Control, 120V/277V				
			30HK 3000K							
			35HK 3500K							
			40HK 4000K							

EXAMPLE: RCC848P2LEDXT30L27KMDE1/SO/MWI/3XCD36/MW

NOTES:

1 Nominal Source Lumens at Any CCT - Per Module 2 Nominal Delivered Lumens 83 CRI at Any CCT with ND, No Lens - Per Module 3 One Module 83 CRI, No Thermal Protector 4 Requires Active Cooling, Account for 1 Watt Per Module 5 30L Max 6 9mm, 13L Max. All XN Draw More Watts Than Other Optics; See Photometry 7 Contact Factory for Additional Options 8 See Product Options Page for Details 9 See Lens Options Page for Details 10 Suspension Points With Power 11 Specify Length in Inches; See Mounting Page for Available Lengths 12 See Color Page for More Options/Consult Factory for Special Finishes 13 Standard Finishes



PROJECT: \_\_\_\_\_  
TYPE: \_\_\_\_\_



Dimensions and values shown are nominal. Spectrum Lighting continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.