



ETCHED TRIPLEX ITALIAN GLASS

GV SERIES / 2700 LUMENS MAX LED

PROJECT: _____
 QUANTITY: _____ TYPE: _____



TX-LEDGV

APPLICATION

Piazza TX Series Italian Triplex glass LED surface luminaire for decorative area lighting.

FEATURES

Clear inner layer, opal center, etched outer layer for soft diffused lighting. Integral aluminum heatsink dissipates heat. 50,000 hours rated LED system life. Wall, ceiling, or pendant mounting.

FINISH

Multi-stage polyester powder-coat process applied on our dedicated paint lines. See mounting and color pages for standard finishes.

ELECTRONICS


GV LED system features high brightness white Samsung LED's. 3 step MacAdam Ellipse binning. Standard CRI: 85+. Higher CRI, R9 and custom LED configurations are available; consult factory. Variety of electronic: 120V/277V and dimming drivers.

CONSTRUCTION

Fixtures are spun in our factory from 0.063 high purity aluminum. Passive aluminum heatsink for optimal thermal management. Glass made in Italy, fixture made in the USA.

CODE COMPLIANCE

ARRA Compliant. ETL listed for damp locations. ADA Compliant, excluding: TX1905LEDGV. Manufactured and tested to UL Standard No. 1598/8750.

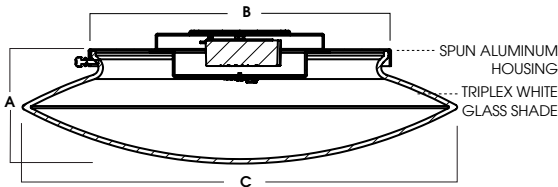

SERIES	A	B	C
TX1303LEDGV	4.3	6.8	11.9
TX1604LEDGV	4.7	6.8	14.9
TX1905LEDGV	5.3	6.8	17.5

WATTAGE TO LUMENS UPDATE			
CURRENT PART NUMBER EXAMPLE	PREVIOUS PART NUMBER EXAMPLE	SOURCE LUMENS ¹	SYSTEM WATTS
TX1303LEDGV15L	TX1303LEDGV14W	1500	9
TX1303LEDGV27L	TX1303LEDGV26W	2700	16

SERIES	LUMENS ¹	CCT	DRIVER / DIMMING ³	OPTIONS ⁴	MOUNTING ⁵	FINISH ⁷
TX1303LEDGV ²	15L 1500 Lm	27K 2700K	EX Electronic Driver, 120V/277V	FS Fuse Holder and Fuse	WM Wall Mount	MW ⁸ Matte White
TX1604LEDGV	27L 2700 Lm	30K 3000K	DS10X 10% 0-10V Dimming, 120V/277V	GS Ceiling Level Gasket	SM Surface Mount	MB ⁸ Matte Black
TX1905LEDGV		35K 3500K	DO10X 1% 0-10V Dimming, 120V/277V		HM ⁶ Hang Straight	PT ⁸ Platinum
		40K 4000K	DS2W1 2 Wire Phase Dimming, 120V		PM ⁶ Rigid Pendant	TW Textured White
			DLTE1 ³ Lutron 2 Wire Phase Dimming, 120V Only			TB Textured Black
						MT Textured Silver
						BZ Bronze
						OB Oil Rubbed Bronze
						CH Charcoal
						GH Graphite
						AC Champagne
						SN Sun Gold
						BR Breccia Rust
						AN Anodic Natural
						CO Copper Metallic
						CC Custom Color

EXAMPLE: TX1303LEDGV15L35KEXGSSMMW

NOTES:
 1 Nominal Source Lumens at 3500K 2 Available With 15L Only 3 Contact Factory for Additional Options 4 See Product Options Page for Details
 5 See Mounting Page for Details on Components and Finishes 6 Specify Length in Inches: See Mounting Page for Available Lengths
 7 Contact Factory for Special Finishes 8 Standard Finishes



COLOR OPTIONS - POWDER COAT PAINT FINISHES

NOTE: NO PRINTED IMAGE CAN EQUAL THE EXACT COLOR OF FINISH ON METAL.
SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION.



STANDARD CORD / STEM / CANOPY FINISHES

FIXTURE COLOR	STANDARD CORD COLOR	STANDARD CANOPY / STEM COLOR
Matte White, Textured White	Matte White	Matte White
Gloss White	Matte White	Gloss White
Matte Black, Gloss Black, Textured Black	Matte Black	Matte Black
All Others	Matte Black	Same Color as Fixture
Custom Color	Contact Factory	Contact Factory

PAINT TIMES


TIER	COST	AVERAGE PAINT TIME*
Tier 1 - Standard Finishes	\$	⓪
Tier 2 - Typical Finishes	\$\$	⓪⓪
Tier 3 - Special Metal Finishes	\$\$\$	⓪⓪⓪
Custom Color	Contact Factory	Contact Factory

*CONTACT FACTORY FOR SPECIFIC PRODUCT LEAD TIMES

TIER 1 - STANDARD FINISHES



TIER 2 - TYPICAL FINISHES

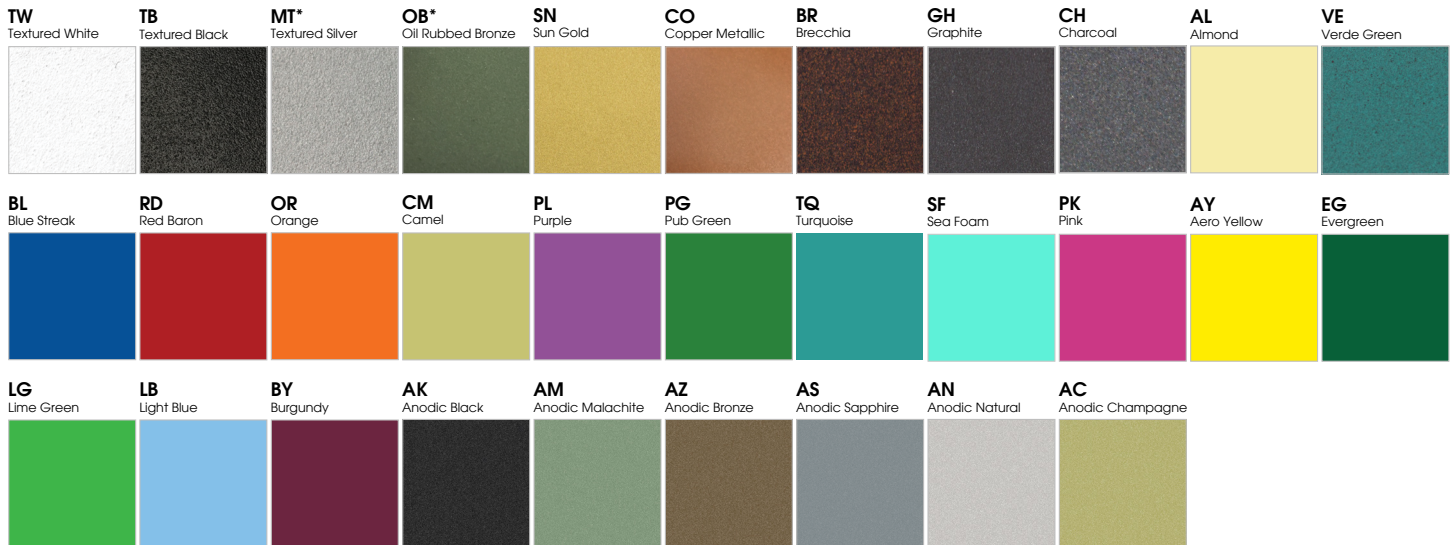

TIER 3 - SPECIAL METAL FINISHES



CUSTOM COLOR FINISHES

CONTACT FACTORY

CC
Custom Color



*UNAVAILABLE FOR WET LOCATION

**UNAVAILABLE FOR INTERIOR

