




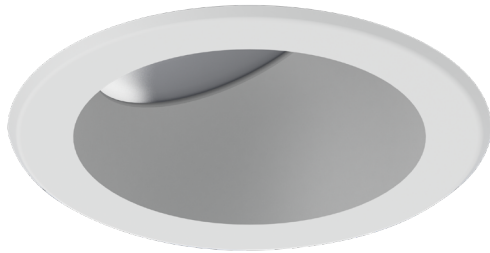

# 7" ROUND ACCENT REMODEL

## XT SERIES / 5000 LUMENS MAX

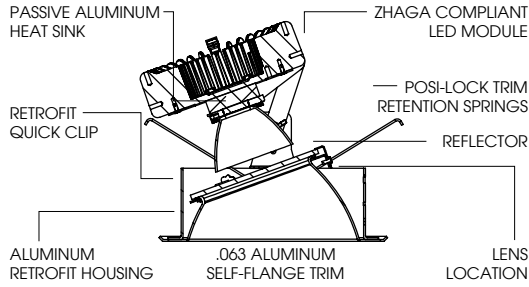

A	B	C
6.5	8.2	7.0
165.1 mm	208.3 mm	177.8 mm

Ceiling Cutout: Ø 7.2"

### SGRTA7XT - TRIM FLANGE / NON-IC RATED

#### APPLICATION

7" Round adjustable LED remodelight platform for focused downlighting.

#### FEATURES

Remodel adjustable accent housing designed for install in finished "hard" ceiling or into existing precut hole. Yoke adjusts, tilts and locks from 0° - 45°. Fixture can be rotated and aimed 360°. Quick mount remodel spring clips with mechanical lock down. Return edge to seat fixture in ceiling. Fixture will work in up to 1" thick ceiling<sup>1</sup>. Quick change LED module with interchangeable optics for job site flexibility and fixture maintenance. Tool-less driver and j-box access. Posi-lock trim retention torsion springs.

#### TRIM FINISH

A variety of architectural powdercoat and anodized finishes are available. Matte White flange is standard.

#### ELECTRONICS

LED system features Xicato LED module with proprietary phosphor technology that provides consistent, stable color with CCT control of +/- 100K over life of the light engine. Base CRI is 83 with 2-step MacAdam Ellipse binning. High CRI is 98 with 1x2-step MacAdam Ellipse binning. Variety of electronic 120V/277V and dimming drivers.

#### CONSTRUCTION

Housing/frame constructed of .060" aluminum to resist corrosion. Self-flanged one piece trim spun from 0.060" thick high purity aluminum and finished to specification.

#### CODE COMPLIANCE

BAA Compliant. Non-IC rated. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. Optional Wet location. Manufactured and tested to UL standards No. 1598/8750.

WATTAGE / LUMENS DATA		
PART NUMBER	SOURCE LUMENS <sup>2</sup>	SYSTEM WATTS
SGRTA7XT10L	1000	11.1
SGRTA7XT13L	1300	15.0
SGRTA7XT20L	2000	23.7
SGRTA7XT30L	3000	34.6
SGRTA7XT40L	4000	39.9
SGRTA7XT50L	5000	54.0

SERIES	LUMENS <sup>2</sup>	CCT	BEAM	DRIVER / VOLTAGE <sup>4</sup>	OPTIONS <sup>7</sup>	TRIM	FINISH	TRIM OPTIONS				
SGRTA7XT	83 CRI		ND 20°	E. Electronic Driver 1 120V 2 277V DS10_ 10% 0-10V DO10_ 1% 0-10V DS2W1 1%, ELV/MLV, 120V DLTE1 <sup>5</sup> 1% Lutron® 2-Wire Forward Phase, 120V DL3E_ <sup>5</sup> 1% Lutron® EcoSystem®, Fade EL10_ <sup>5</sup> 1%, eldoLED ED01_ <sup>5</sup> 0.1%, eldoLED DALI_ <sup>5</sup> DALI Control DMXS <sup>9</sup> DMX Standard Configuration DMXC <sup>9</sup> DMX Non-Standard Custom	FS Fusing EM Emergency Battery CR Corrosion Resistant GR Goof Ring	AR7755XT	SG <sup>8</sup> Semi-Diffuse HZ Haze Full Diffuse MW Matte White MB Matte Black PT Platinum Silver OB Oil Rubbed Bronze CH Charcoal AC Anodic Champagne AS Anodic Sapphire AM Anodic Malachite SN Sun Gold CO Copper Metallic GH Graphite AMB Anti Microbial Finish CC <sup>9</sup> Custom Color	SO <sup>10</sup> Micro Prism GL Solite™ Lens FG Clear Glass Lens FF Frosted Glass Lens PF <sup>11</sup> Polished Flange WL Wet Location				
	10L 1000 Lm	27K 2700K	MD 30°						DS10_ 10% 0-10V	EM Emergency Battery	SG <sup>8</sup> Semi-Diffuse	SO <sup>10</sup> Micro Prism
	13L 1300 Lm	30K 3000K	WD 40°						DO10_ 1% 0-10V	CR Corrosion Resistant	HZ Haze Full Diffuse	GL Solite™ Lens
	20L 2000 Lm	35K 3500K	XW 50°						DS2W1 1%, ELV/MLV, 120V	GR Goof Ring	MW Matte White	FG Clear Glass Lens
	30L 3000 Lm	40K 4000K							DLTE1 <sup>5</sup> 1% Lutron® 2-Wire Forward Phase, 120V		MB Matte Black	PF <sup>11</sup> Polished Flange
	40L 4000 Lm								DL3E_ <sup>5</sup> 1% Lutron® EcoSystem®, Fade		PT Platinum Silver	WL Wet Location
	50L 5000 Lm								EL10_ <sup>5</sup> 1%, eldoLED		OB Oil Rubbed Bronze	
	98 CRI <sup>3</sup>								ED01_ <sup>5</sup> 0.1%, eldoLED		CH Charcoal	
	10L 1000 Lm	27HK 2700K							DALI_ <sup>5</sup> DALI Control		AC Anodic Champagne	
	13L 1300 Lm	30HK 3000K							DMXS <sup>9</sup> DMX Standard Configuration		AS Anodic Sapphire	
	20L 2000 Lm	35HK 3500K							DMXC <sup>9</sup> DMX Non-Standard Custom		AM Anodic Malachite	
	30L 3000 Lm	40HK 4000K									SN Sun Gold	

EXAMPLE: SGRTA7XT13L27KMDE1/AR7755SGSO

#### NOTES:

1 Consult Factory for Thicker Ceiling 2 Nominal Source Lumens at Any CCT 3 98CRI Operates at Higher Watts than 83CRI 4 Contact Factory for Additional Options 5 50L Not Available with Lutron Drivers 6 Contact Factory 7 See Product Options Page For Details 8 Standard Finish 9 Contact Factory for Special Finishes 10 Standard Lens 11 Flange and Reflector Same Finish



PROJECT: \_\_\_\_\_  
TYPE: \_\_\_\_\_



Dimensions and values shown are nominal. Spectrum Lighting continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.