




# ETCHED TRIPLEX ITALIAN GLASS

GV SERIES / 2700 LUMENS MAX LED

PROJECT: \_\_\_\_\_

QUANTITY: \_\_\_\_\_ TYPE: \_\_\_\_\_

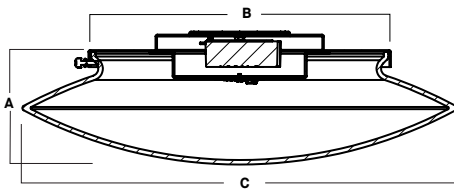

SERIES	A	B	C
TX1303LEDGV	4.3	6.8	11.9
TX1604LEDGV	4.7	6.8	14.9
TX1905LEDGV	5.3	6.8	17.5

## TX-LEDGV

### APPLICATION

Piazza TX Series Italian Triplex glass LED surface luminaire for decorative area lighting.

### FEATURES

Clear inner layer, opal center, etched outer layer for soft diffused lighting. Integral aluminum heatsink dissipates heat. 50,000 hours rated LED system life. Wall, ceiling, or pendant mounting.

### FINISH

Multi-stage polyester powder-coat process applied on our dedicated paint lines.

See mounting and color pages for standard finishes.

### ELECTRONICS

GV LED system features high brightness white Samsung LED's. 3 step MacAdam Ellipse binning. Standard CRI: 85+. Higher CRI, R9 and custom LED configurations are available; consult factory. Variety of electronic 120V/277V and dimming drivers.

### CONSTRUCTION

Fixtures are spun in our factory from 0.063 high purity aluminum. Passive aluminum heatsink for optimal thermal management. Glass made in Italy, fixture made in the USA.

### CODE COMPLIANCE

ARRA Compliant. ETL listed for damp locations. ADA Compliant, excluding: TX1905LEDGV.

Manufactured and tested to UL Standard No. 1598/8750.

WATTAGE TO LUMENS UPDATE			
CURRENT PART NUMBER EXAMPLE	PREVIOUS PART NUMBER EXAMPLE	SOURCE LUMENS <sup>1</sup>	SYSTEM WATTS
TX1303LEDGV15L	TX1303LEDGV14W	1500	9
TX1303LEDGV27L	TX1303LEDGV26W	2700	16

SERIES	LUMENS <sup>1</sup>	CCT	DRIVER / DIMMING <sup>3</sup>	OPTIONS <sup>4</sup>	MOUNTING <sup>5</sup>	FINISH <sup>7</sup>
TX1303LEDGV <sup>2</sup> TX1604LEDGV TX1905LEDGV	15L 1500 Lm 27L 2700 Lm	27K 2700K 30K 3000K 35K 3500K 40K 4000K	EX Electronic Driver, 120V/277V DO10X 1% 0-10V Dimming, 120V/277V DS2W1 2 Wire Phase Dimming, 120V DLTE1 <sup>3</sup> Lutron 2 Wire Phase Dimming, 120V Only	FS Fuse Holder and Fuse GS Ceiling Level Gasket	WM Wall Mount SM Surface Mount HM <sup>6</sup> Hang Straight PM <sup>6</sup> Rigid Pendant	MW <sup>8</sup> Matte White MB <sup>8</sup> Matte Black PT <sup>8</sup> Platinum Silver CC Custom Color

### EXAMPLE: TX1303LEDGV15L35KEXGSSMMW

**NOTES:**  
<sup>1</sup> Nominal Source Lumens at 3500K <sup>2</sup> Available With 15L Only <sup>3</sup> Contact Factory for Additional Options <sup>4</sup> See Product Options Page for Details  
<sup>5</sup> See Mounting Page for Details on Components and Finishes <sup>6</sup> Specify Length in Inches: See Mounting Page for Available Lengths  
<sup>7</sup> Reference Color Sheet Located on Product Webpage for Full List of Available Colors <sup>8</sup> Standard Finishes

