

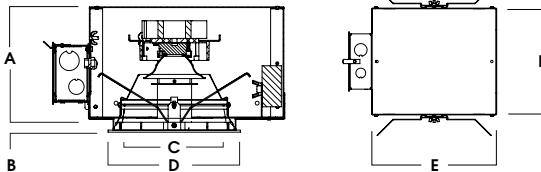


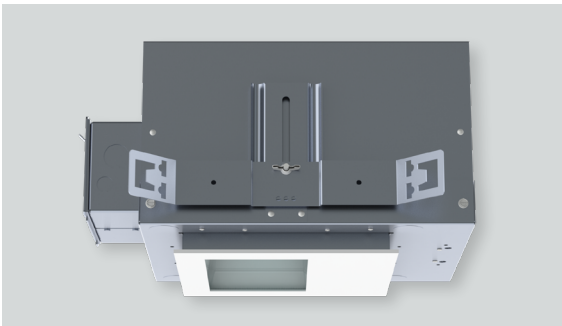

6" SQUARE IC WALL WASH XT SERIES / 2000 LUMENS MAX

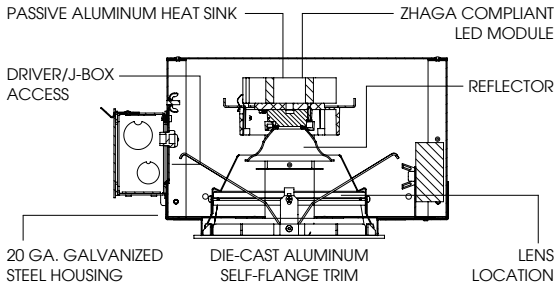

A	B	C	D	E	F
6.4 162.6 mm	.625 15.2 mm	6.0 152.4 mm	7.5 191.0 mm	10L-13L: 13.2 20L: 19.2	9.5 241.3 mm

SWFI6XT - TRIM FLANGE / IC RATED

APPLICATION

Versatile 6" Square aperture recessed LED wall wash for Insulated Ceiling installations with a wide range of lumens and control options.

FEATURES

Two-stage optical system for smooth light distribution and focus control. Quick change LED module with interchangeable optics for job site adjustment and fixture maintenance. Shallow plenum design. Tool-less driver and j-box access. Posi-lock trim retention torsion springs. See SWZI6 series for trimless plaster or wood ceiling.

TRIM FINISH

A variety of architectural powdercoat and anodized finishes are available.

Matte white flange is standard.

ELECTRONICS

LED system features Xicato LED module with proprietary phosphor technology that provides consistent, stable color with CCT control of +/- 100K over life of the light engine. Base CRI is 83 with 2-step MacAdam Ellipse binning. High CRI is 98 with 1x2-step MacAdam Ellipse binning. Variety of electronic 120V/277V and dimming drivers.

CONSTRUCTION

Housing/frame constructed of #20 ga. galvanized steel to resist corrosion. Self-Flanged one piece trim die-cast high purity aluminum and finished to specification.

CODE COMPLIANCE

BAA Compliant. IC rated. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. Optional Wet location. Manufactured and tested to UL standards No. 1598/8750.

WATTAGE TO LUMENS UPDATE					
CURRENT PART NUMBER EXAMPLE	PREVIOUS PART NUMBER EXAMPLE	SOURCE LUMENS ¹	DELIVERED LUMENS ²	SYSTEM WATTS	LPW
SWFI6XT10L	SWFI6LEDX115W	1000	480	11.1	43.2
SWFI6XT13L	SWFI6LEDX120W	1300	647	15.0	43.1
SWFI6XT20L	SWFI6LEDX133W	2000	996	23.7	42.0

SERIES	LUMENS ¹	CCT	OPTICS	DRIVER / DIMMING / VOLTAGE ³	OPTIONS ⁴	TRIM	FINISH	TRIM OPTIONS ¹¹	
SWFI6XT	83 CRI		XW Extra Wide	E Electronic Driver DS10_ 10% 0-10V DO10_ 1% 0-10V DS2W1 1% ELV/MLV, 120V DLTE1 1% Lutron® 2-Wire Forward Phase, 120V DL3E_ 1% Lutron® EcoSystem®, Fade EL10_ 1%, eldoLED ED01_ 0.1%, eldoLED DALI_ DALI Control	1 120V 2 277V	BH27⁵ 27" Solid Bars H12 12" - 24" Expandable Bars H06 6" - 12" Expandable Bars CB24 24" C-Channel Bars EMRM Remote Emergency Battery Pack FS Fusing EB Black Housing CR Corrosion Resistant PR⁶ Deep Ceiling Extension GR Goof Ring CCEA Chicago Ceiling Plenum Rated AMB Anti Microbial Finish	SW6FXT⁷	MW⁸ Matte White MB Matte Black SG⁹ Semi-Diffuse HZ⁹ Haze Full Diffuse PZ Platinum Silver BZ Bronze CH Charcoal AS Anodic Sapphire AM Anodic Malachite SN Sun Gold CO Copper Metallic GH Graphite AMB Anti Microbial Finish CC¹⁰ Custom Color	SKX¹² Linear Wall Wash Lens SKW Linear Wall Wash Lens Wet Location
	10L 1000 Lm	27K 2700K							
	13L 1300 Lm	30K 3000K							
	20L 2000 Lm	35K 3500K							
		40K 4000K							
	98 CRI								
	10L 1000 Lm	27HK 2700K							
	13L 1300 Lm	30HK 3000K							
	20L 2000 Lm	35HK 3500K							
		40HK 4000K							

EXAMPLE: SWFI6XT10L35KXWE1H12/SW6FXTMWSKX

NOTES:

1 Nominal Source Lumens at Any CCT 2 Nominal Delivered Lumens 83 CRI at Any CCT with XW-MW-SKX 3 Contact Factory for Additional Options 4 See Product Options Page for Details 5 Standard Bar Hangers 6 Contact Factory 7 "F" Indicates Self-Flange Trim, Matte White Standard 8 Standard Finish 9 Anodized Reflector with Matte White Flange 10 Contact Factory for Special Finishes 11 Contact factory for Special Lenses/Louvers 12 Standard Lens



PROJECT: _____
TYPE: _____



Dimensions and values shown are nominal. Spectrum Lighting continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.