

**SR14SQLEDOA**

**APPLICATION**

14" square recessed LED downlight LED features soffit/area light for optimal performance.

**FEATURES**

Efficient, powerful LED light source, designed to exceed 50,000 hours of life (**L70**). Multi-Bar mounting brackets. All LED modules and drivers are replaceable and up-gradeable. New and Retrofit/Remodeler options. Wet location use screws fasteners. (4)

**FINISH**

A variety of architectural powdercoat and anodized finishes are available. Matte White flange is standard.

**ELECTRONICS**

LED module features high brightness white Nichia LEDs. 3-step MacAdam Ellipse binning and CRI 84 minimum. Variety of electronic 120V/277V and dimming drivers.

**CONSTRUCTION**


Housing constructed of .050 5052-H32 aluminum. Trim fabricated from aluminum extrusion and finished to specification.

**CODE COMPLIANCE**


BAA Compliant. Non-IC rated. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. Optional Wet location. Manufactured and tested to UL standards No. 1598/8750.

**WATTAGE TO LUMENS UPDATE**


CURRENT PART NUMBER EXAMPLE	PREVIOUS PART NUMBER EXAMPLE	SOURCE LUMENS <sup>1</sup>	SYSTEM WATTS
SR14SQLEDOA11L	SR14SQLEDOA11W	1100	14W
SR14SQLEDOA22L	SR14SQLEDOA18W	2200	26W
SR14SQLEDOA33L	SR14SQLEDOA25W	3300	37W
SR14SQLEDOA44L	SR14SQLEDOA34W	4400	47W

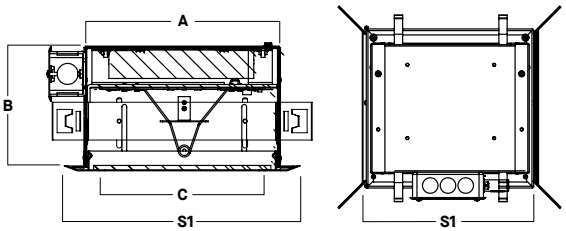

A	B	C	TRIM	S1
13.9	5.1	12.3	FT1414	13.9
13.9	5.1	12.3	RT1414	13.4



FT-Flush Trim/Lens



RT-Regressed Trim/Lens



Retrofit/Remodeler with Flush Trim

SERIES	LUMENS <sup>1</sup>	CCT	DRIVER / VOLTAGE <sup>2</sup>	OPTIONS <sup>3</sup>	TRIM	FINISH <sup>5</sup>	OPTIONS		
SR14SQLEDOA	11L 22L 33L 44L	1100 Lm 2200 Lm 3300 Lm 4400 Lm	30K 3000K	E_ Electronic Driver 1 120V	<b>BH27<sup>4</sup></b> 27" Solid Bars <b>H12</b> 12" - 24" Expandable Bars <b>H06</b> 6" - 12" Expandable Bars <b>CB24</b> 24" C-Channel Bars <b>FS</b> Fusing <b>EM</b> Integral Emergency Battery <b>CR</b> Corrosion Resistant <b>RM</b> Remodeler Housing	FLUSH TRIM <b>FT1414</b> Flush Extruded Aluminum Door	TRIM / FLANGE FINISH <b>MW<sup>5</sup></b> Matte White <b>MB</b> Matte Black <b>PT</b> Platinum <b>CC<sup>5</sup></b> Custom Color	LENS <b>FO<sup>6</sup></b> Matte White Acrylic Lens 90% Efficient <b>SO</b> Solite Lens <b>WL<sup>7</sup></b> Wet Location	
	35K 40K 50K	3500K 4000K 5000K	DS10_ 10%, 0-10V 2 277V	REGRESSED TRIM <b>RT1414</b> Regressed Extruded Aluminum Door		REGRESSED FINISH <b>MW<sup>5</sup></b> Matte White <b>MB</b> Matte Black <b>PT</b> Platinum Silver <b>CC<sup>5</sup></b> Custom Color	TRIM / FLANGE FINISH <b>WF<sup>7</sup></b> White Flange <b>MF</b> Matching Flange		

**EXAMPLE:** SR14SQLEDOA44L35KE1BH27/FT1414MW/FO

**NOTES:**  
 1 Nominal Source Lumens 2 Contact Factory for Additional Options 3 See Product Options Page for Details 4 Standard Bar Hangers 5 Contact Factory for Special Finishes 6 Standard Finish  
 7 For use with Non Matte White Trim Finish 8 Standard Lens 9 Trim Secured with 4 Screws



PROJECT: \_\_\_\_\_  
 QUANTITY: \_\_\_\_\_ TYPE: \_\_\_\_\_

