

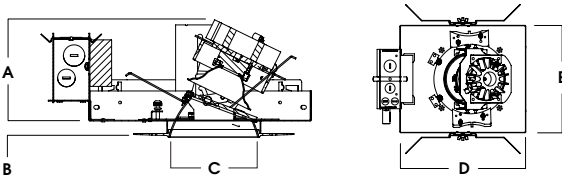


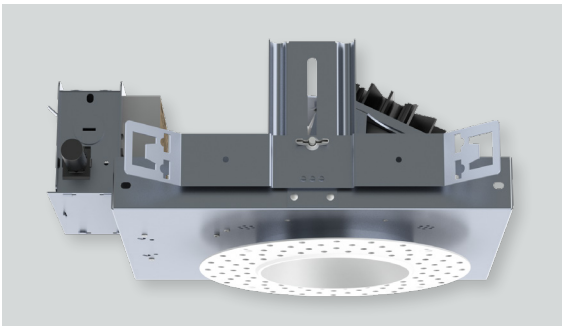

4" ROUND TRIMLESS WALL WASH XT SERIES / 4000 LUMENS MAX

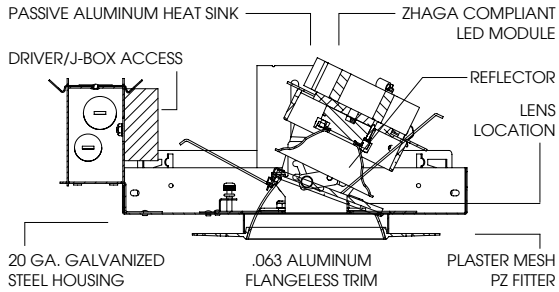

A	B	C	D	E
10L-20L: 5.1 30L-40L: 6.0	.625 15.2 mm	4.0 101.6 mm	13.2 335.3 mm	9.5 241.3 mm

RWZO4XT - TRIMLESS / NON-IC RATED

APPLICATION

Versatile 4" Round aperture recessed LED wall wash with flangeless trim and a wide range of lumens and control options.

FEATURES

Two-stage optical system for smooth light distribution and focus control. Quick change LED module with interchangeable optics for job site adjustment and fixture maintenance. Shallow plenum design. Tool-less driver and j-box access. Posi-lock trim retention torsion springs.

TRIM FINISH

A variety of architectural powdercoat and anodized finishes are available.

Plaster mesh fitter included.

ELECTRONICS

LED system features Xicato LED module with proprietary phosphor technology that provides consistent, stable color with CCT control of +/- 100K over life of the light engine. Base CRI is 83 with 2-step MacAdam Ellipse binning. High CRI is 98 with 1x2-step MacAdam Ellipse binning. Variety of electronic 120V/277V and dimming drivers.

CONSTRUCTION

Housing/frame constructed of #20 ga. galvanized steel to resist corrosion. Flangeless one piece trim spun from 0.063" thick high purity aluminum and finished to specification.

CODE COMPLIANCE

BAA Compliant. Non-IC rated. UL certified to meet US and Canadian standards. Suitable for dry or damp locations. Optional Wet location. Manufactured and tested to UL standards No. 1598/8750.

WATTAGE TO LUMENS UPDATE					
CURRENT PART NUMBER EXAMPLE	PREVIOUS PART NUMBER EXAMPLE	SOURCE LUMENS ¹	DELIVERED LUMENS ²	SYSTEM WATTS	LPW
RWZO4XT10L	RWZO4LEDXI15W	1000	552	11.1	49.7
RWZO4XT13L	RWZO4LEDXI20W	1300	744	15.0	49.6
RWZO4XT20L	RWZO4LEDXI33W	2000	1145	23.7	48.3
RWZO4XT30L	RWZO4LEDXI52W	3000	1717	34.6	49.6
RWZO4XT40L	N/A	4000	2203	39.9	55.2

SERIES	LUMENS ¹	CCT	OPTICS	DRIVER / DIMMING / VOLTAGE ³	OPTIONS ⁵	TRIM	FINISH	TRIM OPTIONS ¹¹			
RWZO4XT	83 CRI		WD Wide	E Electronic Driver	1 120V 2 277V	BH27 ⁶ H12 H06 CB24 EM FS EB CR PR ⁷ GR AMB	27" Solid Bars 12" - 24" Expandable Bars 6" - 12" Expandable Bars 24" C-Channel Bars Integral Emergency Battery Fusing Black Housing Corrosion Resistant Deep Ceiling Extension Goof Ring Anti Microbial Finish	RW4NXT ⁸ SG ⁹ HZ MW MB PT OB CH AC AS AM SN CO GH AMB CC ¹⁰	SKX ¹² SKW		
	10L	1000 Lm								27K	2700K
	13L	1300 Lm								30K	3000K
	20L	2000 Lm								35K	3500K
	30L	3000 Lm								40K	4000K
	40L	4000 Lm									
	98 CRI		XW Extra Wide	DS10_ DO10_ DS2W1 DLTE1 DL3E_ EL10_ ED01_ DALI_ DMXS_4 DMXC_4					Linear Wall Wash Lens Linear Wall Wash Lens Wet Location		
	10L	1000 Lm								27HK	2700K
	13L	1300 Lm								30HK	3000K
	20L	2000 Lm								35HK	3500K
	30L	3000 Lm								40HK	4000K

EXAMPLE: RWZO4XT10L35KXWE1/H12/RW4NXTSGSKX

NOTES:
 1 Nominal Source Lumens at Any CCT 2 Nominal Delivered Lumens 83 CRI at Any CCT with XW-SG-SKX 3 Contact Factory for Additional Options 4 Contact Factory 5 See Product Options Page for Details 6 Standard Bar Hangers
 7 Contact Factory 8 "N" Indicates Flangeless Trim 9 Standard Finish 10 Contact Factory for Special Finishes 11 Contact Factory for Special Lenses/Louvers 12 Standard Lens



PROJECT: _____
 TYPE: _____



Dimensions and values shown are nominal. Spectrum Lighting continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.