



SAR56INC

APPLICATIONS

PAR56 stage lighting style track head for Incandescent lamping.

FEATURES

Tilt and rotation points for optional aiming. Accepts up to 3 accessories. Fuse holder standard. Consult Factory for fuse specifications. Hinged door for easy re-lamping.

FINISH

Variety of powdercoat finishes available.

CONSTRUCTION


Spun/Fabricated .063 aluminum.

ELECTRONICS

120V only.

LABELS

UL/ETL listed for dry locations. Manufactured and tested to UL Standard No. 1598.

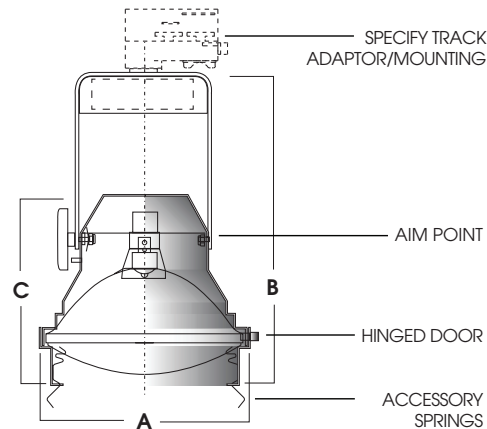

A	B	C
6.8	9.7	6.9
172.7 mm	246.4 mm	175.3 mm

SERIES	OPTIONS	TRACK ADAPTOR/MOUNTING	FINISH	ACCESSORIES*
SAR56INC	<p>FS-Fuse holder and fuse MWL*- Label with Max Wattage SW-Switch On/Off</p> <p>*Specify Wattage</p>	<p>TRACK MOUNT</p> <p>GES66- Works with GES Track TEK100- Works with TEK Track HTEK100- Works with HTEK Track GA100- Works with XTS Track</p> <p>SURFACE MOUNT</p> <p>PC1- Pipe Clamp C6P- 6" Straight Cord and Plug** C24P- 24" Straight Cord and Plug** CC6P- 6" Coil Cord and Plug** C5P- 5" Round Surface Mount Canopy 120V/277V GES70- Monopoint Canopy 120V Only/GES66 Adaptor</p> <p>Accessory Finish will Match Fixture **Specify Plug Type</p>	<p>MW- Matte White MB- Matte Black GW- Gloss White GB- Gloss Black PT- Platinum Silver MT- Mini Texture Silver TW- Texture White TB- Mini Texture Black BZ- Bronze AZ- Anodic Bronze CC- Custom Color</p> <p>See SPECTRUM color chart for a full list of colors</p> <p>Black, Silver, Bronze Finishes With Black Adaptor/Cords White Finishes With White Adaptor/Cord</p>	<p>LN56- Lens See Lens Pages SN56- Snoot BD56- Barn Doors HL56- Hex Louver</p> <p>*Accessory Finish will Match Fixture</p>

EXAMPLE: SAR56INCFS/TEK100MTBD56

Dimensions shown are nominal. Spectrum Lighting is continually improving products and reserves the right to make changes that will not alter performance or appearance with or without written notice.

PROJECT:	TYPE:
CAT. NO.:	