




**CONTEMPORARY WALL  
SCNCE  
DAMP LOCATION  
FM SERIES**

PROJECT: \_\_\_\_\_

QUANTITY: \_\_\_\_\_ TYPE: \_\_\_\_\_

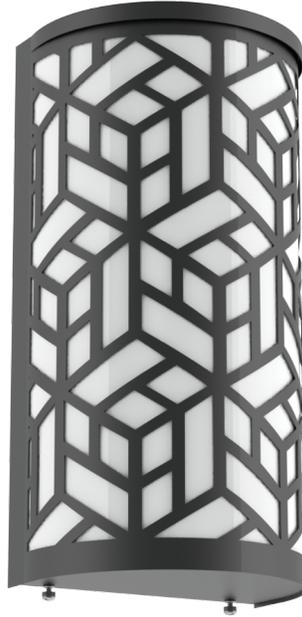

WSC0816FM  
RWBX- Rubix



WSC0816FM  
BGLW - Bungalow



WSC0816FM  
NTC - Intersecting Circles



WSC0816FM  
BAND - Two Band Classic



WSC0816FM  
CUST - Custom

SERIES	LUMENS <sup>1</sup>	CCT	DRIVER / DIMMING <sup>2</sup>	STYLE	OPTIONS <sup>3</sup>	MOUNTING <sup>4</sup>	FINISH <sup>5</sup>
WSC0816FM	10L	1000 Lm	EX Electronic Driver, 120V/277V DS2W1 ELV / MLV 120V	RWBX	BCV Top / Bottom Cover for No End Light	WM Wall Mount	MW <sup>6</sup> Matte White
	20L	2000 Lm		BGLW			MB <sup>6</sup> Matte Black
	30K	3000K		INTC			PT <sup>6</sup> Platinum
	35K	3500K		BAND			CC Custom Color
	40K	4000K		CUST			

EXAMPLE: WSC0816FM10L35KEXRWBXWMMB

**NOTES:**  
 1 Nominal Source Lumens At Any CCT 2 Contact Factory for Additional Options 3 See Product Options Page for Details  
 4 See Mounting Page for Details on Components and Finishes 5 Reference Color Sheet Located on Product Webpage for Full List of Available Colors 6 Standard Finishes






DECORATIVE

# CONTEMPORARY WALL SCENCE DAMP LOCATION FM SERIES

## HOUSING DIMENSIONS

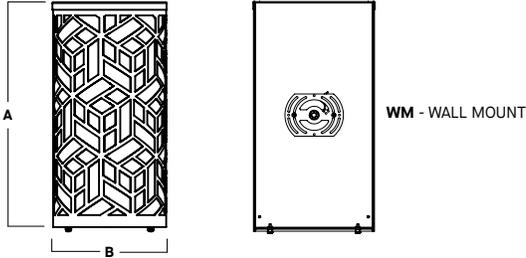

A	B
16.2 411.5 mm	8.2 208.3 mm

### APPLICATION

Wall Sconce Series for decorative wall accent lighting.

### FEATURES

SpecLume series fixtures offers contemporary style with functional luminaire performance. All fixtures are designed and manufactured in our factory. Custom designs available, contact factory.

### FINISH

Multi-stage polyester powder-coat process applied on our dedicated paint lines. A wide variety of standard and custom finishes are available. All exposed materials are chromate pretreated to resist corrosion.

### ELECTRONIC

LED module features high brightness white LEDs. 3-step MacAdam Ellipses binning and CRI 84 minimum. Variety of electronic 120v/277v and dimming drivers.

### CONSTRUCTION

Fixture housing is fabricated 5052 H32 aluminum construction to resist corrosion. Acrylic is UV stabilized formed matte white opal.

### CODE COMPLIANCE

BAA compliant. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. ADA Compliant. Manufactured and tested to UL standards No. 1598/8750.

