



**ALUMINUM DECO-REFLECTOR
PENDANT
DAMP LOCATION
XT SERIES**

PROJECT: _____
 QUANTITY: _____ TYPE: _____



RPEXT1014XT
 MT - Textured Silver
 ORI - Orange Interior
 FGR - Frosted Glass Ring



RPEXT1014XT
 GB - Glass Black
 ALI - Almond Interior
 CFG - Centered Frosted Glass Tier



RPEXT1014XT
 AM - Anodic Malachite
 GHI - Graphite Interior
 FGR - Frosted Glass Ring



RPEXT1014XT
 SN - Sun Gold
 SFI - Sea Foam Interior
 1MR - Single Metal Ring

SERIES	LUMENS ¹	CCT	DRIVER / DIMMING ²	MOUNTING ³	TIER OPTIONS	INTERIOR ⁷	FINISH ⁷
RPEXT1014XT	83 CRI		EX Electronic Driver, 120V/277V DO10X 1%, 0-10V, 120V/277V DS2W1 ELV/MLV, 120V DLTE1 Lutron® 2-Wire Forward Phase (MLV), 120V DL3EX 1%, Lutron® EcoSystem®, 120V/277V	HM⁴ Hang Straight AT⁴ Hang Straight All Thread PM⁴ Rigid Pendant Mount CD⁴ Cord / Cable Mount CM⁴ Cord Mount EMRM 7W Remote EM EMEN 7W Remote with Enclosure	CFG Center Frosted Glass Tier FGR Frosted Glass Ring 1MR⁵ Single Metal Ring TIER COLOR OPTIONS FC⁶ Fixture Color MW Matte White MB Matte Black PT Platinum Silver SN Sun Gold EG Evergreen RD Red Baron	MW⁸ Matte White CCI Custom Color FCI Fixture Color Interior See Page 4 for Full Range of Color Options (83-90081)	MW⁸ Matte White MB⁸ Matte Black PT⁸ Platinum Silver CC Custom Color See Page 4 for Full Range of Color Options (83-90081)
RPEXT1214XT	10L 1000 Lm	27K 2700K					
	13L 1300 Lm	30K 3000K					
	20L 2000 Lm	35K 3500K					
	30L 3000 Lm	40K 4000K					
	40L 4000 Lm						
	98 CRI						
	10L 1000 Lm	27HK 2700K					
	13L 1300 Lm	30HK 3000K					
	20L 2000 Lm	35HK 3500K					
	30L 3000 Lm	40HK 4000K					

EXAMPLE: RPEXT1014XT30L30KEX/CD36PT1TCFG

NOTES:
 1 Nominal Source Lumens At Any CCT 2 Contact Factory for Additional Options 3 See Mounting Page for Details on Components and Finishes 4 Specify Length in Inches: See Mounting Page for Available Lengths 5 Same Finish as Housing 6 Tier to Match Fixture if Finish Not Specified 7 See Color Page for More Options/Consult Factory for Special Finishes 8 Standard Finishes






ALUMINUM DECO-REFLECTOR PENDANT DAMP LOCATION XT SERIES

LUMENS / WATTAGE DATA				
PART NUMBER	SOURCE LUMENS ¹	DELIVERED LUMENS ²	SYSTEM WATTS	LPW
RP1014XT10L	1000	780	8	97.5
RP1014XT13L	1300	1014	12	84.5
RP1014XT20L	2000	1560	20	78
RP1014XT30L	3000	2340	30	78
RP1014XT40L	4000	3120	40	78

¹ Nominal Source Lumens at Any CCT ² Nominal Delivered Lumens at Any CCT

HOUSING DIMENSIONS

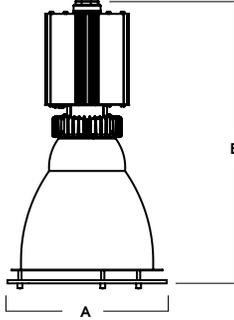

Dimensioned with RPEXT1014XT with Decorative Trim

SERIES	A	B
RPEXT1014XT	12.3	21.8
RPEXT1214XT	14.0	23.3

APPLICATION

The Aluminum Reflector Pendant's distinctive styling will enhance any space with efficient lighting and striking design. Deco series offers suspended glass and metal tier options.

FEATURES

Speculume series fixtures offer simple contemporary style with functional luminaire performance. All fixtures are designed and manufactured in our factory. Reflector pendant is available in two sizes with direct lighting. Separate finishes may be chosen for fixture and mounting. Interchangeable LED module for ease of maintenance and upgradable. A variety of mounting and finish options available.

FINISH

Multi-stage polyester powder-coat process applied on our dedicated paint lines. A wide variety of standard and custom finishes are available. All exposed materials are chromate pretreated to resist corrosion. Matte white interior is standard.

ELECTRONICS

LED system features Xicato LED module with proprietary phosphor technology that provides consistent stable color with CCT control of +/- 100K over life of the light engine. Base CRI is 83 with 1 x 2-step MacAdam Ellipse binning. High CRI is 98 with 1 x 2-step MacAdam Ellipse binning. Variety of electronic 120V/277V and dimming drivers.

CONSTRUCTION

Fixtures are machined in our factory from 0.125 thick aluminum and finished to specification. Passive machined aluminum heatsink for optimal thermal management. OSD diffusion optic lens standard.

CODE COMPLIANCE

BAA compliant. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. Manufactured and tested to UL standards No. 1598/8750

SERIES SIZES

RPEXT1014XT



RPEXT1214XT



CEILING MOUNT

(SEE MOUNTING PAGES FOR MORE OPTIONS & CANOPY DIMENSIONS.)

HM / AT / PM

HANG STRAIGHT / ALL THREAD / PENDANT



RPEXT1014XT SHOWN WITH PM

CD

CORD / CABLE MOUNT



RPEXT1014XT SHOWN WITH CD

CM

CORD MOUNT



RPEXT1014XT SHOWN WITH CM



MOUNTING & ACCESSORIES

SOME OPTIONS NOT AVAILABLE ON ALL FIXTURES. CONSULT SPECIFICATION SHEETS. SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION. NOTE: THIS IS TYPICAL OF SPECULUME SPECIFICATION FOR PENDANT MOUNTING. INDIVIDUAL FIXTURES OR PROJECTS MAY HAVE SPECIALIZED REQUIREMENTS.



CEILING MOUNTING

<p>RDC5 - SMALL DRIVER CANOPY (STANDARD) MOUNTS TO 4" OCTO J-BOX</p> <p>CP13 - LARGE DRIVER CANOPY</p>	<p>HM* HANG STRAIGHT 45° SWIVEL 1/2" STEM - 3/8" NPT</p> <p>ORDER: HM (Length) SPECIFY LENGTH: HM3 - 3" HM24 - 24" HM6 - 6" HM36 - 36" HM12 - 12" HM48 - 48" HM18 - 18" HM72 - 72" HMLC(XX) Custom Length (Specify in Inches)</p>	<p>AT** HANG STRAIGHT ALL-THREAD 45° SWIVEL 1/2" STEM - 1/4" IP</p> <p>ORDER: AT (Length) SPECIFY LENGTH: AT12 - 12" AT24 - 24" AT36 - 36" <small>FIELD CUT: THREADED PIPE TO LENGTH NEEDED. CUT PIPE COVER 3/4" SHORTER THAN THREADED PIPE. SUPPLY PIPE COVER OVER THREADED PIPE.</small></p>	<p>PM* RIGID PENDANT MOUNT RIGID 1/2" STEM - 3/8" NPT</p> <p>ORDER: PM (Length) SPECIFY LENGTH: PM3 - 3" PM24 - 24" PM6 - 6" PM36 - 36" PM12 - 12" PM48 - 48" PM18 - 18" PM72 - 72" PMLC(XX) Custom Length (Specify in Inches)</p>	<p>CD CORD / CABLE MOUNT SJ CORD WITH 1/16 SS CABLE</p> <p>ORDER: CD (Length) SPECIFY LENGTH: CD36 - 36" CD72 - 72" CD144 - 144" CDLC(XX) Custom Length (Specify in Inches)</p>	<p>CM CORD MOUNT SJ CORD WITH STRAIN RELIEF</p> <p>ORDER: CM (Length) SPECIFY LENGTH: CM36 - 36" CM72 - 72" CM144 - 144" CMLC(XX) Custom Length (Specify in Inches)</p>
--	--	--	---	--	--

*MAXIMUM ONE PIECE STEM LENGTH IS 72". **MAXIMUM ONE PIECE STEM LENGTH IS 36". LONGER LENGTHS ARE POSSIBLE USING MULTIPLE STEMS AND COUPLERS. **ORDER IN 12" INCREMENTS. ODD SIZES MAY BE FIELD CUT

EMERGENCY BATTERY OPTIONS

EMCR - LARGE DRIVER CANOPY FOR 10W EMERGENCY BATTERY (FOR ROUND CEILING MOUNT TYPES)

REMOTE EMERGENCY BATTERY OPTIONS

<p>EMRM* - 7W REMOTE EMERGENCY BATTERY (50' MAX)</p> <table border="1"> <thead> <tr> <th>A</th> <th>B</th> <th>C</th> </tr> </thead> <tbody> <tr> <td>1.3</td> <td>12.6</td> <td>13.0</td> </tr> </tbody> </table>	A	B	C	1.3	12.6	13.0	<p>EMEN* - 7W REMOTE EMERGENCY BATTERY WITH ENCLOSURE (50' MAX)</p> <table border="1"> <thead> <tr> <th>A</th> <th>B</th> <th>C</th> </tr> </thead> <tbody> <tr> <td>2.0</td> <td>17.0</td> <td>6.2</td> </tr> </tbody> </table>	A	B	C	2.0	17.0	6.2
A	B	C											
1.3	12.6	13.0											
A	B	C											
2.0	17.0	6.2											

*OTHER EM BATTERY SIZES AVAILABLE. CONSULT FACTORY



COLOR OPTIONS - POWDER COAT PAINT FINISHES

NOTE: NO PRINTED IMAGE CAN EQUAL THE EXACT COLOR OF FINISH ON METAL.
SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION.



STANDARD CORD / STEM / CANOPY FINISHES

FIXTURE COLOR	STANDARD CORD COLOR	STANDARD CANOPY / STEM COLOR
Matte White, Textured White	Matte White	Matte White
Gloss White	Matte White	Gloss White
Matte Black, Gloss Black, Textured Black	Matte Black	Matte Black
All Others	Matte Black	Same Color as Fixture
Custom Color	Contact Factory	Contact Factory

PAINT TIMES


TIER	COST	AVERAGE PAINT TIME*
Tier 1 - Standard Finishes	\$	⌚
Tier 2 - Typical Finishes	\$\$	⌚⌚
Custom Color	Contact Factory	Contact Factory

*CONTACT FACTORY FOR SPECIFIC PRODUCT LEAD TIMES

TIER 1 - STANDARD FINISHES



TIER 2 - TYPICAL FINISHES

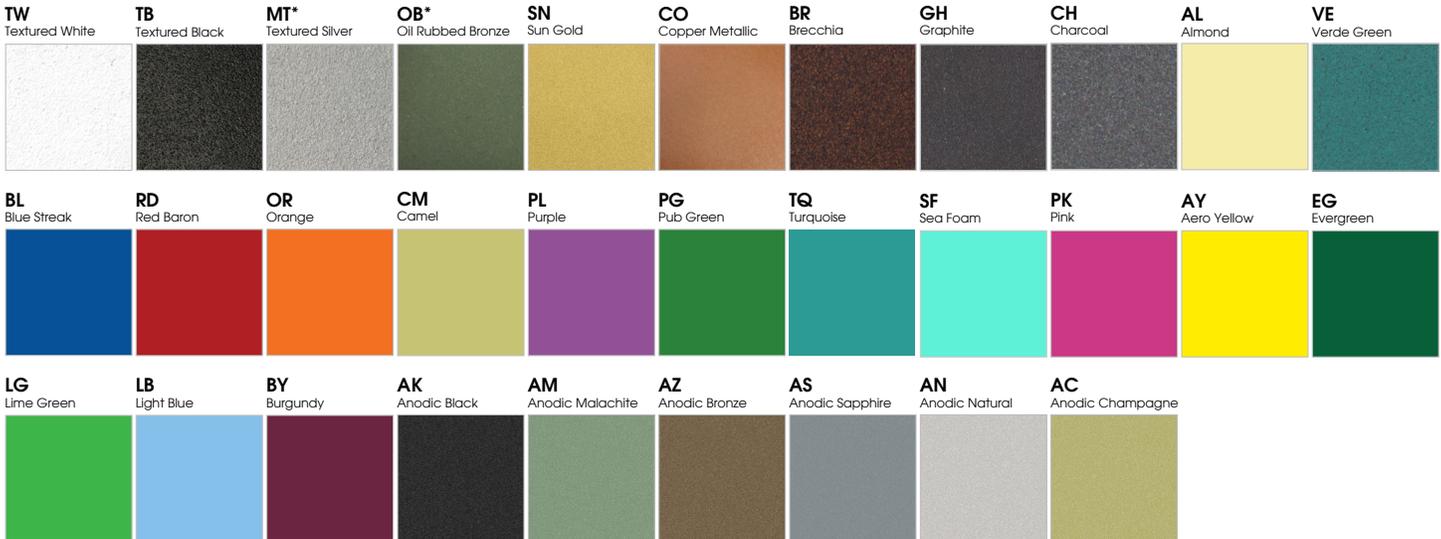

CUSTOM COLOR FINISHES

CONTACT FACTORY

CC
Custom Color



*UNAVAILABLE FOR WET LOCATION

