


3.5" ROUND SHOWER LIGHT

PROJECT: _____
 QUANTITY: _____ TYPE: _____

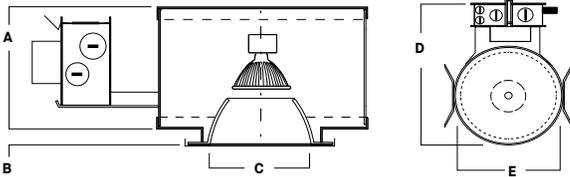

A	B	C	D	E
4.7	0.6	3.5	12.0	8.0
120.6 mm	15.8 mm	88.9 mm	304.8 mm	203.2 mm

Fixture Weight: 4.0 lbs

Ceiling Cutout: Ø 3.5

SGDG4Y

APPLICATION

3.5" aperture round LED MR16 showerlight downlight with die-cast trim.

FEATURES

Efficient reflector design optimized for MR16 LED lamps (sold by others). Integral 5/8" (0.625") plaster ring. Tool-less access for ease of maintenance. Multi-bar adjustable mounting brackets.

TRIM FINISH

Variety of powdercoat and anodized finishes available on trim.

ELECTRONICS

120V Electronic transformer is standard.

CONSTRUCTION

Frame constructed of 20 ga. aluminum. Trim die-cast aluminum.

CODE COMPLIANCE

ETL listed for damp locations. Wet location available. Manufactured and tested to UL Standard No. 1598.

PRODUCT SELECTOR GUIDE

SERIES	DIMMING	OPTIONS	BAR HANGERS	TRIM	FINISH	LENS
SGDG4Y				AR42FW		

EXAMPLE

SGDG4Y	E1		BH27	AR42FW	MW	SO
---------------	----	--	-------------	---------------	----	----

HOUSING

SERIES	DIMMING	OPTIONS
SGDG4Y	E1 Electronic, 120V	CR Corrosion Resistant TR Top Relamping Option

MOUNTING OPTIONS

BAR HANGERS
BH27 27" Solid Bars H12 12" - 24" Expandable Bars CB24 24" C-Channel Bars

TRIM OPTIONS

TRIM	FINISH	LENS
AR42FW	MW Matte White MB Matte Black	GL Clear Glass Lens SO Micro Prism Solite™ Lens NL No Lens

