
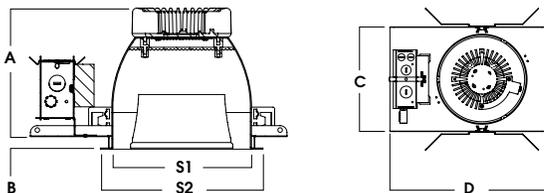
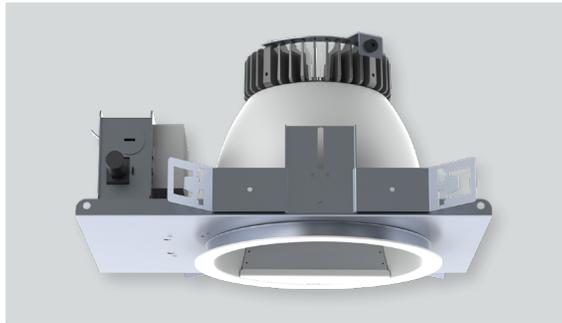


8" ROUND DEEP CUTOFF WALL WASH

GV SERIES / 5500 LUMENS MAX

recessed fixtures

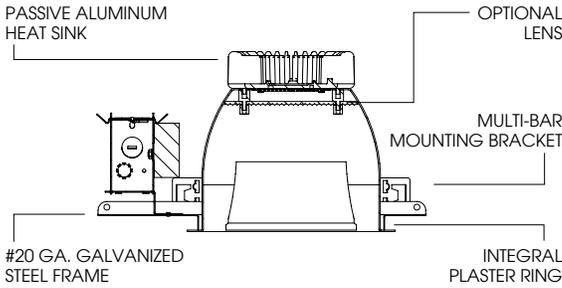

A	B	C	D	S1	S2
7.012	.625	9.38	14.0	7.5	8.88
178.11 mm	15.88 mm	238.25 mm	355.6 mm	190.5 mm	225.55 mm

SGVW8LEDGV - TRIM FLANGE / NON-IC RATED

APPLICATION

8" Round aperture recessed LED wall wash with deep cutoff for general illumination.

FEATURES

Single stage optical system with deep reflector design delivers smooth glare-free general illumination. Tool-less LED module, driver, and J-Box access. Multi-Bar mounting brackets. BH27 Standard mounting bars included. Posi-lock trim retention springs. Integral 0.625" collar, with Deep Ceiling Extension (PR), consult factory.

TRIM FINISH

A variety of architectural powdercoat and anodized finishes are available.

Matte White flange is standard.

ELECTRONICS

GV LED system features high brightness white Samsung LED's. 3-step MacAdam Ellipse binning. Standard CRI: 85+. Higher CRI, R9 and custom LED configurations are available; consult factory. A variety of electronic 120V/277V and dimming drivers available.

CONSTRUCTION

Housing/frame constructed of #20 ga. galvanized steel to resist corrosion. Self-flanged one piece trim spun from 0.063" thick high purity aluminum and finished to specification. Passive machined aluminum heatsink.

CODE COMPLIANCE

BAA Compliant. Non-IC rated. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. Manufactured and tested to UL standards No. 1598/8750.

WATTAGE TO LUMENS UPDATE					
CURRENT PART NUMBER EXAMPLE	PREVIOUS PART NUMBER EXAMPLE	SOURCE LUMENS ¹	DELIVERED LUMENS ²	SYSTEM WATTS	LPW/LER
SGVW8LEDGV15L	SGW8LEDGV14W	1500	1212	13.3	91.1
SGVW8LEDGV27L	SGW8LEDGV26W	2700	2191	22.3	98.3
SGVW8LEDGV37L	SGW8LEDGV37W	3700	2959	29.1	101.7
SGVW8LEDGV55L	SGW8LEDGV55W	5500	4375	42.6	102.7

SERIES	LUMENS ¹	CCT	DRIVER / VOLTAGE ³	OPTIONS ⁴	TRIM	FINISH ⁷	TRIM OPTIONS
SGVW8LEDGV	15L 1500 Lm	27K 2700K	E Electronic Driver	BH27⁵ 27" Solid Bars H12 12" - 24" Expandable Bars H06 6" - 12" Expandable Bars CB24 24" C-Channel Bars EM Integral Emergency Battery FS Fusing EB Black Housing CR Corrosion Resistant PR⁶ Deep Ceiling Extension GR Goof Ring AMB Anti Microbial Finish	AR8790GV⁶	SG⁹ Semi-Diffuse HZ Haze Full Diffuse MW Matte White MB Matte Black PT Platinum Silver OB Oil Rubbed Bronze CH Charcoal AC Anodic Champagne AS Anodic Sapphire AM Anodic Malachite SN Sun Gold CO Copper Metallic GH Graphite AMB Anti Microbial Finish CC Custom Color	SK¹⁰ Skytex™ Lens GS Gasket
	27L 2700 Lm	30K 3000K	DS10_ 10% 0-10V				
	37L 3700 Lm	35K 3500K	DO10_ 1% 0-10V				
	55L 5500 Lm	40K 4000K	DS2W1 1% ELV/MLV, 120V				
		50K 5000K	DLTE1 1% Lutron® 2-Wire Forward Phase, 120V				
		DL3E_ 1% Lutron® EcoSystem®, Fade					
		EL10_ 1%, eldoLED					
		ED01_ 0.1%, eldoLED					
		DALI_ DALI Control					

EXAMPLE: SGVW8LEDGV15L35KE1BH27/AR8790GVGWSK

NOTES:
 1 Nominal Source Lumens at 35K 2 Nominal Delivered Lumens at 35K with SG 3 Contact Factory for Additional Options 4 See Product Options Page For Details 5 Standard Bar Hangers 6 Contact Factory
 7 Contact Factory for Special Finishes 8 Matte White Flange Standard 9 Standard Finish 10 Standard Lens



PROJECT: _____
 TYPE: _____



Dimensions and values shown are nominal. Spectrum Lighting continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.