



# 14" STAGECOACH SHADE DAMP / WET LOCATION CLASSIC SHAPES

PROJECT: \_\_\_\_\_  
QUANTITY: \_\_\_\_\_ TYPE: \_\_\_\_\_



SV1411GV  
RD - Red Baron



SV1411GV  
MB - Matte Black



SV1411GV  
VE - Verde Green



SV1411GV  
PL - Purple

SERIES	LUMENS <sup>1</sup>		CCT	DRIVER / DIMMING <sup>2</sup>		ACCESSORIES <sup>7</sup>		MOUNTING <sup>9</sup>		FINISH <sup>13</sup>		WET KIT		
SV1411GV	15L 27L 37L 55L	1500 Lm 2700 Lm 3700 Lm 5500 Lm	80 CRI		EX <sup>3</sup> DS10X <sup>4</sup> DO10X <sup>4</sup> DS2W1 <sup>5</sup> DLTE1 <sup>6</sup>  DL3EX <sup>6</sup>	Electronic Driver, 120V/277V 10%, 0-10V, 120V/277V 1%, 0-10V, 120V/277V ELV/MLV, 120V Lutron® 2-Wire Forward Phase (MLV), 120V 1%, Lutron® EcoSystem®, Fades to Black, 120V/277V	ENCLOSURES		WALL MOUNT		MW <sup>14</sup> MB <sup>14</sup> PT <sup>14</sup> CC	Matte White Matte Black Platinum Silver Custom Color	WLKA	Wet Location Kit
			TF2 <sup>8</sup> TG2 MF2 MG2 FJ2 FG2	4" Frosted Dome 4" Dome Wire Guard 4" Frosted Mini 4" Short Wire Guard 4" Frosted Tall 4" Tall Wire Guard			CP104 CP104KO  CP106 CP6/RMD SP90 <sup>10</sup> PA <sup>10</sup>	Small Driver Canopy Small Driver Canopy w/ Knockouts Large Driver Canopy Remote Mount Driver Straight Arm Mounting Arm Style	See Page 5 for Full Range of Color Options (83-90082)					
										CEILING MOUNT				
										90 CRI		RDC5 CP13 HM <sup>11</sup> AT <sup>11</sup> PM <sup>11</sup> CD <sup>11</sup> CM <sup>11</sup> EMCR <sup>12</sup> EMRM EMEN		
27HK 30HK 35HK 40HK	2700K 3000K 3500K 4000K													

EXAMPLE: SV1411GV15L35KEXTF2/CP104PA15BZ

#### NOTES:

1 Nominal Source Lumens at 35K 2 Contact Factory for Additional Options 3 37L Max with CP104 4 Available with CP106/RDC5/CP13 Only  
5 37L Max with CP104/RDC5, 55L Max with CP106/CP13 6 Available with CP106/CP13 Only 7 Enclosure, Wire Guard Required - Choose One Option  
8 Standard Enclosure 9 See Mounting Page for Details on Components and Finishes 10 See Mounting Page for Available Arm Options  
11 Specify Length in Inches: See Mounting Page for Available Lengths 12 EMCR Replaces RDC5 or CP13  
13 See Color Page for More Options/Consult Factory for Special Finishes 14 Standard Finishes



 **Spectrum Lighting**




# 14" STAGECOACH SHADE DAMP / WET LOCATION CLASSIC SHAPES

LUMENS / WATTAGE DATA				
PART NUMBER	SOURCE LUMENS <sup>1</sup>	DELIVERED LUMENS <sup>2</sup>	SYSTEM WATTS	LPW
SV1411GV15L	1500	1091	10	109
SV1411GV27L	2700	1905	18	106
SV1411GV37L	3700	2794	26	107
SV1411GV55L	5500	4115	39	129

1 Nominal Source Lumens at 35K 2 Nominal Delivered Lumens at 35K

## HOUSING DIMENSIONS



A	B
14.9 378.5 mm	11.4 289.6 mm

## APPLICATION

The Stagecoach Shade RLM has a classic bell shape for decorative downlighting.

## FEATURES

Spectrum Lighting's RLM Classics are inspired by vintage lighting fixtures redesigned with modern LED light sources and materials. The wide range of options for illumination, mounting, enclosures, guards and finishes allows for creative fixture specification and design. LED module and driver are serviceable for future replacement.

## FINISH

Multi-stage polyester powder-coat process applied on our dedicated paint lines. Variety of standard and custom finishes are available. Matte White interior standard.

## ELECTRONICS

GV LED system features high brightness white Samsung LED's. 3-step MacAdam Ellipse binning. Standard CRI: 80+. Higher CRI, R9 and custom LED configurations are available; consult factory. Choice of electronic 120V/277V and dimming drivers.


## CONSTRUCTION

Fixture shades are spun in our factory from 0.063 high purity aluminum. Wall mount canopies are die-cast aluminum with stainless steel hardware. Wall arms are formed 3/4 NPT aluminum pipe and may be field cut.

## CODE COMPLIANCE

BAA compliant. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. Wet Location Option. Manufactured and tested to UL standards No. 1598/8750.

## ENCLOSURES

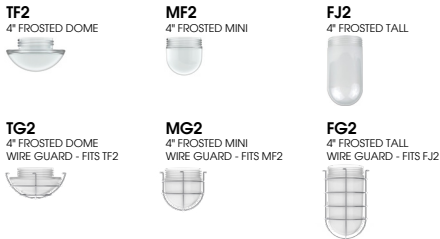

## WALL MOUNT

(SEE MOUNTING PAGES FOR MORE OPTIONS & DIMENSIONS.)

**PA**  
MOUNTING ARM STYLE



SV1411GV SHOWN WITH CP104PA23

## CEILING MOUNT

(SEE MOUNTING PAGES FOR MORE OPTIONS & CANOPY DIMENSIONS.)

**HM / AT / PM**  
HANG STRAIGHT / ALL THREAD / PENDANT



SV1411GV SHOWN WITH RDC5PM

**CD**  
CORD / CABLE MOUNT



SV1411GV SHOWN WITH RDC5CD

**CM**  
CORD MOUNT



SV1411GV SHOWN WITH RDC5CM



14" STAGECOACH SHADE  
DAMP / WET LOCATION  
CLASSIC SHAPES / PHOTOMETRIC DATA

SV1411GV-55L-35K-EX-TF2-MWI

CANDLEPOWER CURVE	INTENSITY	ZONAL LUMENS	SINGLE UNIT: PERFORMANCE INITIAL FOOTCANDLES BASED ON IES BEAM ANGLE				MULTIPLE UNITS: PERFORMANCE 80/50/20% REFLECTANCES INITIAL FOOTCANDLES AND WATTS PER SQUARE FOOT													
	0.00°				Mounting Height AFF	FC at Center on Floor	Beam Diameter	FC at Beam Edge	Ceiling Height	Fixture Spacing	RCR 2		RCR 4							
	0.00° 1,915	0° - 10° 182 4%									FC *	W/Sq. Ft.	FC *	W/Sq. Ft.						
	5.00° 1,892	0° - 20° 684 17%			6.0 ' 53 fc	14.4 ' 21 fc			14' 12' *	27 0.28	22 0.28									
	10.00° 1,837	0° - 30° 1,420 35%			8.0 ' 30 fc	19.2 ' 12 fc			18' 14' **	21 0.21	11 0.14									
	15.00° 1,763	0° - 40° 2,296 56%			10.0 ' 19 fc	24.0 ' 7 fc			22' 16' ***	13 0.13	15 0.18									
	20.00° 1,669	0° - 60° 3,761 91%			12.0 ' 13 fc	28.8 ' 5 fc			2' Suspension Length Square rooms used for multiple units: - RCR 2: Length & Width = Ceiling Ht. - 4.5' x 5.00 - RCR 4: Length & Width = Ceiling Ht. - 4.5' x 2.50 * Average Footcandles at 2.5' Above Floor * Exceeds spacing criteria by 11% ** Exceeds spacing criteria by -9% *** Exceeds spacing criteria by -20%											
	30.00° 1,471	0° - 80° 4,087 99%			14.0 ' 10 fc	33.6 ' 4 fc														
	40.00° 1,284	0° - 90° 4,113 100%			16.0 ' 7 fc	38.4 ' 3 fc														
	50.00° 970	Total 4,113 100%			20.0 ' 5 fc	48.0 ' 2 fc														
	60.00° 355				24.0 ' 3 fc	57.6 ' 1 fc														
	70.00° 138																			
	80.00° 54																			
	90.00° 2																			
Delivered Lumens: 4,113 Luminaire Watts: 39 LER: 105.46																				
CP at 0deg (Nadir): 1,915 CRI: 85+																				
Beam Angle: 100.26 Spacing Ratio: 1.14																				
Lamp Multiplier: 37L x 0.679 CCT Multiplier: 27K x 0.971, 30K x 0.985, 40K x 1.03																				




# MOUNTING & ACCESSORIES

SOME OPTIONS NOT AVAILABLE ON ALL FIXTURES. CONSULT SPECIFICATION SHEETS. SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION. NOTE: THIS IS TYPICAL OF RLM SPECIFICATION FOR MOUNTING. INDIVIDUAL FIXTURES OR PROJECTS MAY HAVE SPECIALIZED REQUIREMENTS.




## WALL MOUNTING

**CP104 - SMALL DRIVER CANOPY (STANDARD)**  
MAY BE USED AS SPLICE BOX FOR DIRECT FEED  
NOT AVAILABLE W/ PA16 & PA16F




**CP106 - LARGE DRIVER CANOPY**  
MAY BE USED AS SPLICE BOX FOR DIRECT FEED



**CP6/RMD - REMOTE MOUNT DRIVER**  
MOUNTS DIRECTLY TO WALL OR OCTAGON STYLE J-BOX




CUSTOM AND OTHER WALL ARMS AVAILABLE - CONTACT FACTORY. ARMS MAY BE FIELD CUT ON WALL SIDE - FIXTURE SIDE THREADED 3/4" NPT REQUIRES SEALANT FOR WET LOCATION.

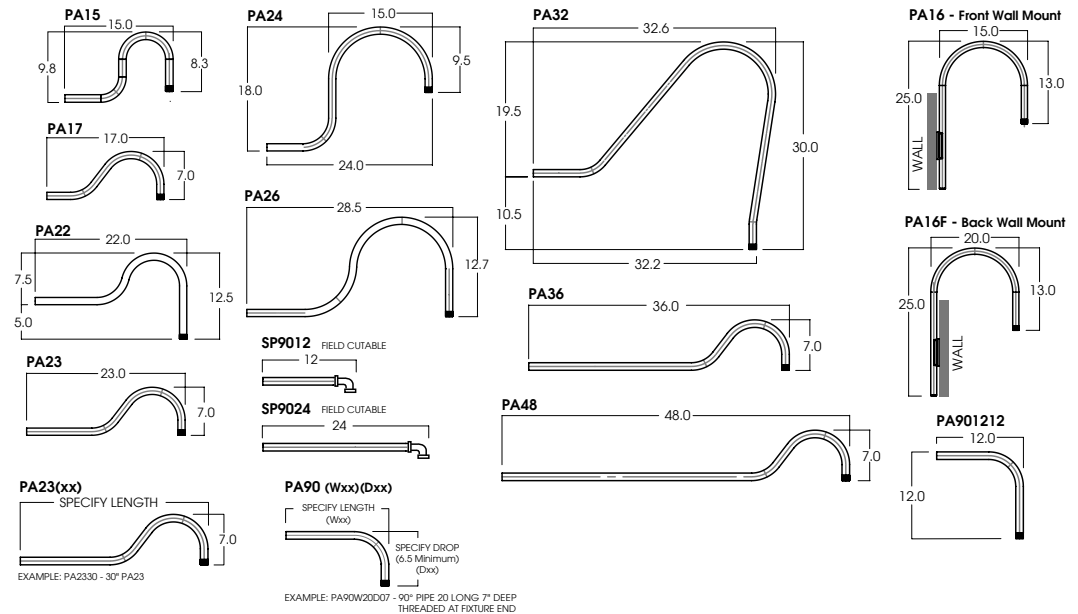


## CEILING MOUNTING


**RDC5 - SMALL DRIVER CANOPY (STANDARD)**  
MOUNTS TO 4" OCTO J-BOX



**CP13 - LARGE DRIVER CANOPY**




**HM\***  
HANG STRAIGHT  
45° SWIVEL 5/8" OD STEM - 3/8" IP




ORDER: HM (Length)  
SPECIFY LENGTH:  
HM3 - 3" HM24 - 24"  
HM6 - 6" HM36 - 36"  
HM12 - 12" HM48 - 48"  
HM18 - 18" HM72 - 72"  
HMLC(XX)  
Custom Length  
(Specify in Inches)

**PM\***  
RIGID PENDANT MOUNT  
RIGID 5/8" OD STEM - 3/8" IP




ORDER: PM (Length)  
SPECIFY LENGTH:  
PM3 - 3" PM24 - 24"  
PM6 - 6" PM36 - 36"  
PM12 - 12" PM48 - 48"  
PM18 - 18" PM72 - 72"  
PMLC(XX)  
Custom Length  
(Specify in Inches)

**AT\*\***  
HANG STRAIGHT ALL THREAD  
45° SWIVEL 5/8" OD STEM - 1/4" IP



ORDER: AT (Length)  
SPECIFY LENGTH:  
AT12 - 12"  
AT24 - 24"  
AT36 - 36"  
AT48 - 48"  
AT60 - 60"  
AT72 - 72"  
FIELD CUT THREADED PIPE TO LENGTH NEEDED CUT PIPE COVER 3/8" SHORTER THAN THREADED PIPE SUPPLY COVER COVER THREADED PIPE

**CD**  
CORD / CABLE MOUNT  
SJ CORD WITH 1/16 SS CABLE



ORDER: CD (Length)  
SPECIFY LENGTH:  
CD36 - 36"  
CD72 - 72"  
CD144 - 144"  
CDLC(XX)  
Custom Length  
(Specify in Inches)

**CM**  
CORD MOUNT  
SJ CORD WITH STRAIN RELIEF




ORDER: CM (Length)  
SPECIFY LENGTH:  
CM36 - 36"  
CM72 - 72"  
CM144 - 144"  
CMLC(XX)  
Custom Length  
(Specify in Inches)

\*MAXIMUM ONE PIECE STEM LENGTH IS 72". \*\*MAXIMUM ONE PIECE STEM LENGTH IS 36". LONGER LENGTHS ARE POSSIBLE USING MULTIPLE STEMS AND COUPLERS. \*\*ORDER IN 12" INCREMENTS. ODD SIZES MAY BE FIELD CUT


## EMERGENCY BATTERY OPTIONS

**EMCR - LARGE DRIVER CANOPY FOR 10W EMERGENCY BATTERY**




## REMOTE EMERGENCY BATTERY OPTIONS

**EMRM\* - 7W REMOTE EMERGENCY BATTERY (50' MAX)**



**EMEN\* - 7W REMOTE EMERGENCY BATTERY WITH ENCLOSURE (50' MAX)**



\*OTHER EM BATTERY SIZES AVAILABLE. CONTACT FACTORY.



# COLOR OPTIONS - POWDER COAT PAINT FINISHES

NOTE: NO PRINTED IMAGE CAN EQUAL THE EXACT COLOR OF FINISH ON METAL.  
SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION.



## STANDARD CORD / STEM / CANOPY FINISHES

FIXTURE COLOR	STANDARD CORD COLOR	STANDARD CANOPY / STEM COLOR
Matte White, Textured White	Matte White	Matte White
Gloss White	Matte White	Gloss White
Matte Black, Gloss Black, Textured Black	Matte Black	Matte Black
All Others	Matte Black	Same Color as Fixture
Custom Color	Contact Factory	Contact Factory

## PAINT TIMES

TIER	COST	AVERAGE PAINT TIME*
Tier 1 - Standard Finishes	\$	①
Tier 2 - Typical Finishes	\$\$	①①
Tier 3 - Special Metal Finishes	\$\$\$	①①①
Custom Color	Contact Factory	Contact Factory

\*CONTACT FACTORY FOR SPECIFIC PRODUCT LEAD TIMES

## TIER 1 - STANDARD FINISHES

<b>MW</b> Matte White	<b>GW</b> Gloss White	<b>PT</b> Platinum Silver	<b>MB</b> Matte Black	<b>GB</b> Gloss Black	<b>BZ</b> Bronze

## TIER 2 - TYPICAL FINISHES

<b>TW</b> Textured White	<b>TB</b> Textured Black	<b>MT*</b> Textured Silver	<b>OB*</b> Oil Rubbed Bronze	<b>SN</b> Sun Gold	<b>CO</b> Copper Metallic	<b>BR</b> Brecchia	<b>GH</b> Graphite	<b>CH</b> Charcoal	<b>AL</b> Almond	<b>VE</b> Verde Green
<b>BL</b> Blue Streak	<b>RD</b> Red Baron	<b>OR</b> Orange	<b>CM</b> Carnel	<b>PL</b> Purple	<b>PG</b> Pub Green	<b>TQ</b> Turquoise	<b>SF</b> Sea Foam	<b>PK</b> Pink	<b>AY</b> Aero Yellow	<b>EG</b> Evergreen
<b>LG</b> Lime Green	<b>LB</b> Light Blue	<b>BY</b> Burgundy	<b>AK</b> Anodic Black	<b>AM</b> Anodic Malachite	<b>AZ</b> Anodic Bronze	<b>AS</b> Anodic Sapphire	<b>AN</b> Anodic Natural	<b>AC</b> Anodic Champagne		

## TIER 3 - SPECIAL METAL FINISHES

NOT AVAILABLE ON ALL FIXTURES. PLEASE CONSULT SPECIFICATION SHEETS OR FACTORY FOR AVAILABILITY.

<b>GA*</b> Galvanized	<b>BA**/**</b> Brushed Aluminum	<b>GF*</b> Gold Flake

## CUSTOM COLOR FINISHES

CONTACT FACTORY

**CC**  
Custom Color



\*UNAVAILABLE FOR WET LOCATION

\*\*UNAVAILABLE FOR INTERIOR

