




**2' x 4' CENTER BASKET**  
**DAMP LOCATION**  
 TROFFER LUME / 7500 LUMENS

PROJECT: \_\_\_\_\_  
 TYPE: \_\_\_\_\_

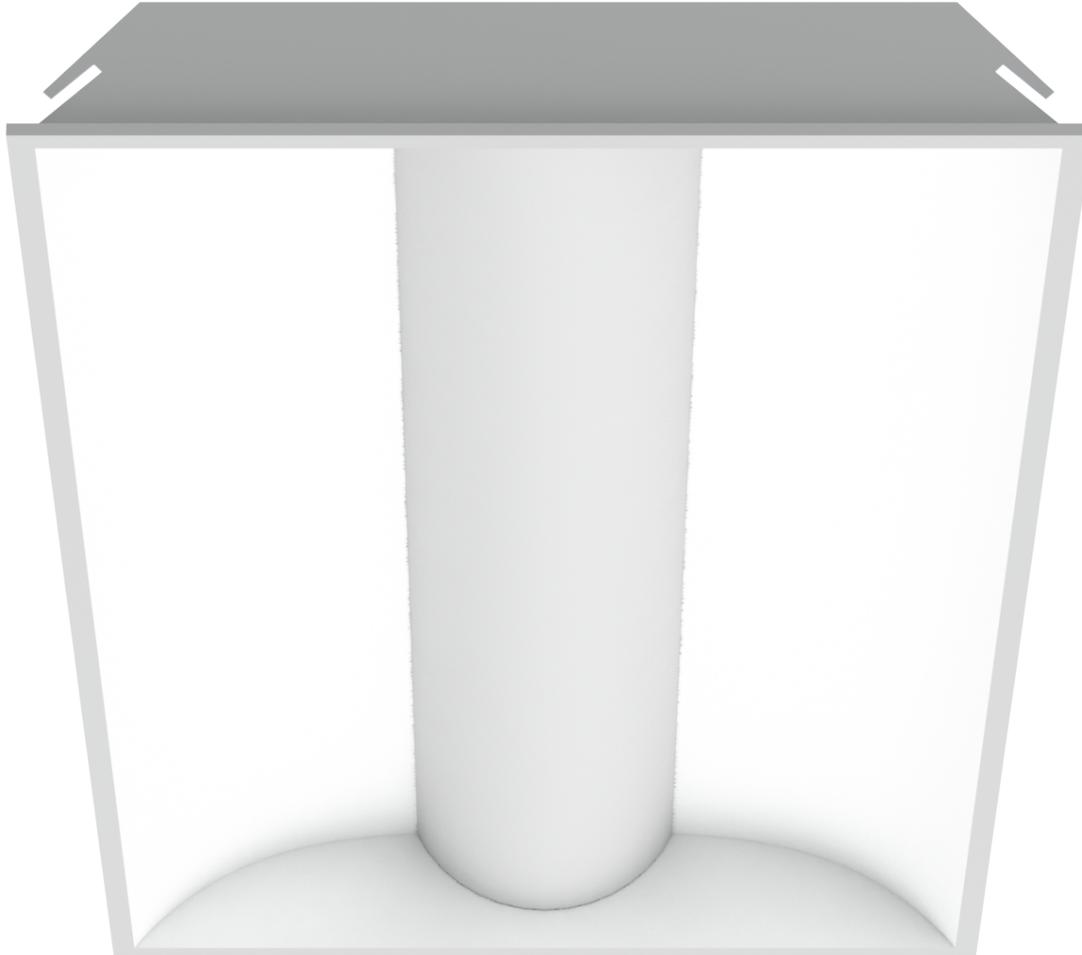

SERIES	LUMENS <sup>1</sup>	CCT	DRIVER / VOLTAGE
<b>CB2448</b> No Sensor	<b>75L</b> 7500 Lm	<b>35K</b> 3500K <b>40K</b> 4000K	<b>DX</b> 1%, 0-10V, 120V/277V
<b>CS2448</b> With Sensor			

EXAMPLE: CB244875L35KDX

NOTES:  
 1 Nominal Delivered Lumens at 35K



Dimensions and values shown are nominal. Spectrum Lighting continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.






**2' x 4' CENTER BASKET**  
**DAMP LOCATION**  
 TROFFER LUME / 7500 LUMENS

LUMENS / WATTAGE DATA			
PART NUMBER	DELIVERED LUMENS <sup>1</sup>	SYSTEM WATTS	LPW
CB244875L	7500	50	145

<sup>1</sup> Nominal Source Lumens at 35K

**HOUSING DIMENSIONS**

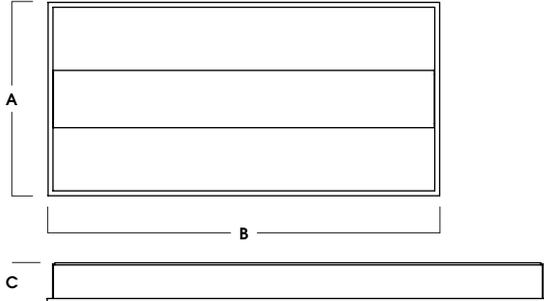

A	B	C
23.6 599.4 mm	47.8 1214.1 mm	3.95 100.3 mm

Weight: 7 Lbs

**APPLICATION**

Architectural recessed LED for general illumination. This is an immediate product category. 5 days is typical.

**FEATURES**

Designed for recessed grid ceiling installation. Produces even glare free illumination. Shallow plenum design, under 4".

**ELECTRONICS**

LED system features high brightness white LED's. 3-step MacAdam Ellipse binning. Standard CRI: 83 typical. 0-10V 10% 120V/277V dimming driver standard. Optional integral motion and day light sensor.

**CONSTRUCTION**

Housing constructed of powdercoat formed steel. Snap in extruded frosted acrylic diffuser. Lens is opal matte white acrylic. LED are placed for optimal lens uniformly.

**CODE COMPLIANCE**

Non-IC rated. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. Manufactured and tested to UL standards No. 1598/8750.

**BOTTOM VIEW**

