


4" MODULAR ACCENT / IC HOUSING REGRESSED RAZOR EDGE FLANGELESS

MR16 SERIES / MULTI-MODULE

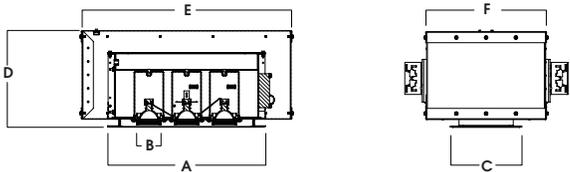

#OF MODULES	APERTURE			H	L	W	CUTOUT
	A	B	C				
1	4.0	2.3	4.0	8.8	8.11	11.3	5.1" x 5.1"
2	8.0	2.3	4.0	8.8	11.72	11.3	5.1" x 8.8"
3	12.0	2.3	4.0	8.8	15.72	11.3	5.1" x 12.8"
4	16.0	2.3	4.0	8.8	19.75	11.3	5.1" x 16.8"

RC4-ICLVNF - REGRESSED RAZOR EDGE / IC RATED

APPLICATION

RC4 series MR16 Low Voltage modular fixture for retail, residential and commercial accent lighting.

FEATURES

Regressed Razor Edge Flangeless for plaster ceilings install. Fixture available with 1-4 modules. Shallow 5" Plenum Depth. Fixture modules rotate 359°, lock and tilt to 40° for optimal aiming. Easy transformer and j-box access. Multi-bar adjustable mounting brackets. Posi-lock trim attachment. Front loading lamp bezel accepts up to two lens/louvers options. Integral 0.625" collar, with Deep Ceiling Extension (PR) consult factory. Maximum wattage label (MWL) for low wattage Halogen or LED lamps.

TRIM FINISH

A variety of architectural powdercoat finishes are available. Plaster mesh filter included.

ELECTRONICS

Electronic 120V transformer is standard. 277V electronic, 120V and 277V LED rated electronic and remote transformer options. High temperature rated porcelain GU10 socket. 37W per lamp max.

CONSTRUCTION

Housing formed #20 gauge galvanized steel, finished to specification. Trim fabricated from aluminum extrusion and finished to specification.

CODE COMPLIANCE

ARRA Compliant. Rated for direct contact with insulation. ETL/UL/CSA listed for damp locations. Manufactured and tested to UL standards No. 1598.

SERIES ¹	LAMPS	TRANSFORMER / VOLTAGE	OPTIONS ²	INTERIOR	TRIM	FINISHES ⁵	
RC44ICLVNF 1 Module	MR16	E _{LED} Electronic Driver Transformer for Use with LED MR16 Lamps NTR No Transformer for Remote Transformer Application GU10 GU10 120V Socket No Transformer	LENS		MWI White MBI Black PTI Platinum BZI Bronze CCI Custom Color	NF144 4" x 4"	MW ⁶ Matte White MB ⁶ Matte Black PT ⁶ Platinum Silver NF148 4" x 8" BZ Bronze CH Charcoal GH Graphite SN Sun Gold AC Champagne AN Anodic Natural NF1412 4" x 12" SN AC AN CN Caramel WF Matte White Flange CC Custom Color
			GL16 Clear	FG16 Frosted			
			SK16 Linear	SO16 Solite Diffusion			
			HL16 Hex Louver	SN16 Snoot			
RC48ICLVNF 2 Modules			LN16 ³ Color Lens				
RC412ICLVNF 3 Modules			OPTIONS				
RC416ICLVNF 4 Modules			BH27 27" Flat Bar				
			CB24 24" C-Channel				
			CB48 48" C-Channel				
			MWL(**) Max Wattage Label				
			RTT150E1 150W Remote Transformer				
			RTT300E1 300W Remote Transformer				
			FS Fusing				
			PR ⁴ Deep Plaster Neck				

EXAMPLE: RC48ICLVNFMR16E1LED/SO16SN16BH27MBI/NF148MW

NOTES:

1 PZ Filter Shipped Separately 2 See Product Options Page for Details 3 See Lens Options Page for Details 4 Contact Factory 5 Contact Factory for Special Finishes 6 Standard Finishes

Dimensions and values shown are nominal. Spectrum Lighting continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.



PROJECT:	TYPE:
CAT. NO.:	

LED
MR16

